



ARMARIOS REFRIGERADOS

CARACTERÍSTICAS GENERALES	3
---------------------------	---

OPCIONES BAJO PEDIDO	4
----------------------	---

Armario GN 2/1 refrigeración y congelados ALTA EFICIENCIA ENERGÉTICA	5
--	---

Armario GN 2/1 refrigeración y congelados, costados embutidos. (4 páginas)	7
--	---

Armario GN 2/1 refrigeración y congelados. (6 páginas)	11
--	----

Armario GN 2/1 H197 con ruedas	17
--------------------------------	----

Armario GN 2/1, refrigeración y congelados, PUERTA CRISTAL	19
--	----

Armario gn 2/1 refrigeración con DEPARTAMENTO 1/2+1/2	21
---	----

Armario GN 2/1, refrigeración con DEPARTAMENTO DE PESCADO	23
---	----

Armario GN 2/1, refrigeración con DEPARTAMENTO DE CONGELADOS	25
--	----

Armario GN 1/1 - GN 2/1 refrigeración y congelados	27
--	----

Armario GN 2/1 refrigeración y congelados	29
---	----

Armario refrigerado para PESCADO	31
----------------------------------	----

Armario PASTELERÍA 60x40, refrigeración y congelados	33
--	----

Armario bandejas y contenedores 60 x 40	35
---	----

Armario EURO SNACK 400L., refrigeración y congelados	37
--	----

Armario EURO SNACK 750L., refrigeración y congelados	39
--	----

Armario SNACK., refrigeración y congelados. (6 páginas)	41
---	----

Armario SNACK, refrigeración y congelados, PUERTA CRISTAL	47
---	----

Armario SNACK, refrigeración con departamentos 1/2 + 1/2	49
--	----

Armario SNACK, refrigeración con DEPARTAMENTO DE PESCADO	51
--	----

Armario SNACK, refrigeración con DEPARTAMENTO DE CONGELADOS	53
---	----

Armario SNACK 340 L/750 L., refrigeración y congelados	55
--	----

CARACTERISTICAS GENERALES GENERAL FEATURES

GN



EuroSnack




SNACK



- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Estantes interiores de alambre en acero plastificado, regulables en altura (según modelo puede variar)
- Pies en acero inox (160 mm) ajustables en altura
- Unidad condensadora ventilada y extraíble
- Evaporador en la parte superior, con tratamiento anti-corrosión
- Evaporación automática del agua de descarche

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Plasticized steel wire shelves, height adjustable (depending on model, can change)
- Stainless steel adjustable legs
- Removable and fan assisted condenser unit
- Evaporator on the upper internal side, coated with anti-corrosion material
- Automatic evaporation of defrost water

AISI-304



patas de 160 mm
160 mm leg



bisagras cierre automático
self closing hinges



unidad cond. extraíble
removable cond. unit



interior esquinas redondeadas
rounded corner edges



burlete desmontable
gasket detachable



contrapuerta embutida
pressformed rear door



evaporador en el techo
top mounted evaporator



desagüe limpieza
cleaning drainage

OPCIONES BAJO PEDIDO OPTIONS ON DEMAND

pre-instalación
remote condenser unit




puerta con cerradura
lock for door



respaldo inox
SS rear side



estantes chapa perforada
perforated shelves



puertas de cristal
glass doors



barras carniceras
bars for meat




patas de 90 mm
90 mm legs




ruedas
castors



hidrocarburo
hydrocarbon



voltaje y frecuencia
voltage and frequency





CO-EGR-751-PF85	
CO-ECG-751-PF85	

CO-EGRE-751-PF85	
CO-ECGE-751-PF85	

ref.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (kW/24h)*	capacidad capacity (L)	estantes shelves	niveles levels	tensión monofásica single phase voltage	refrigerante coolant
CO-EGR-751	-2°C+8°C	710	2060	800	356	1.27	550	3	24	230V - 50 Hz	R-290
CO-ECG-751	-20°C-15°C	710	2060	800	450		550	3	24	230V - 50 Hz	R-290
CO-EGRE-751	-2°C+8°C	710	2060	800	356	1.52	550	3	24	230V - 50 Hz	R-290
CO-ECGE-751	-20°C-15°C	710	2060	800	450		550	3	24	230V - 50 Hz	R-290

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Costados en acero inox AISI-304-con 24 embuticiones para apoyo de parrillas y cubetas GN 1/1 o GN 2/1
- Estantes interiores GN 2/1, de alambre en acero plastificado
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Cerradura con llave, de serie
- Luz interior LED
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos elevable para acceso a unidad condensadora
- Sistema frigorífico **monobloque**, evaporador + unidad condensadora
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche del evaporador
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero GWP y cero ODP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- **CO-EGR**: temperatura de trabajo 16°C a 43°C ambiente

CO-EGR / CO-ECG: Puerta inox - solid door


CO-EGRE / CO-ECGE: Puerta doble cristal - double glazed door

Opciones - Options

parrilla adicional GN 2/1	GN 2/1 extra shelf
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- AISI-304 stainless steel inner sides, 24 press-formed supports for GN 2/1 containers or shelves
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- Inner side of doors by stamped steel
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- LED lighting
- AISI -304 adjustable legs, 135 to 200 mm
- Hinged front control panel, allows easy access to the condenser unit
- **Monoblock** refrigeration system: condenser unit + evaporator
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero GWP and zero ODP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- **CO-EGR**: operating ambient temperature 16°C to 43°C

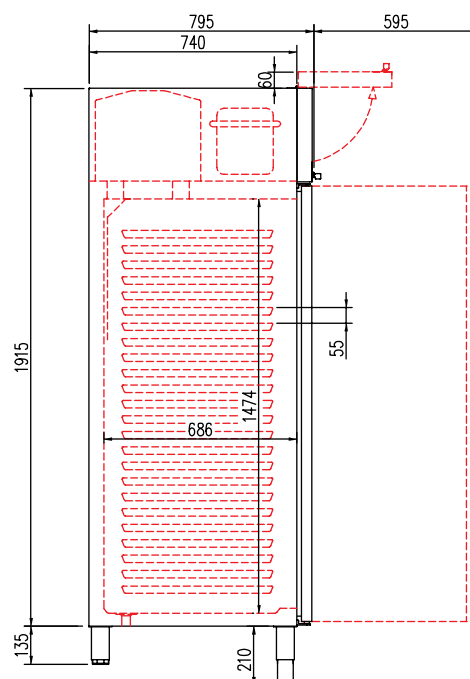



85mm
aislamiento
insulation

MONOBLOCK



1,27
KW/24h



CO-EGR-751-PF85

Electrónica avanzada
High technology electronic system




Interior redondeado con desagüe
Rounded corners



Contrapuerta embutida
Press-formed rear side door



Aislamiento 40 Kg/cm³
40 Kg / cm³ insulation





CO-AGR-751-PF	
CO-ACG-751-PF	

CO-AGR-751-PF85	
CO-ACG-751-PF85	

CO-AGRE-751-PF	
----------------	--

CO-AGRE-751-PF85	
------------------	--

ref.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	niveles levels	tensión monofásica single phase voltage	refrigerante coolant
CO-AGR / CO-AGRE-751-PF	-2°C+8°C	645	2060	800	356	430 / 470	550	3	24	230V - 50 Hz	R-404A
CO-ACG-751-PF	-20°C-15°C	645	2060	800	450	840	550	3	24	230V - 50 Hz	R-404A
CO-AGR / CO-AGRE-751-PF85	-2°C+8°C	710	2060	800	356	430 / 470	550	3	24	230V - 50 Hz	R-404A
CO-ACG-751-PF85	-20°C-15°C	710	2060	800	450	840	550	3	24	230V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Costados en acero inox AISI-304-con 24 embuticiones para apoyo de parrillas y cubetas GN 1/1 o GN 2/1
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Cerradura con llave, de serie
- Luz interior LED
- Estantes interiores GN 2/1, de alambre en acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Paro ventiladores tiro forzado para acceso a unidad condensadora
- Sistema frigorífico **monobloque**, evaporador + unidad condensadora
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche del evaporador
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero GWP y cero ODP
- **CO-PF85CO**:- 85 mm aislamiento
- **CO-PF**: 60 mm aislamiento
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- **AGR-PF / PF85**: temperatura de trabajo 16°C a 43°C ambiente


- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- AISI-304 stainless steel inner sides, 24 press-formed supports for GN 2/1 containers or shelves
- Inner side of doors by stamped steel
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- LED lighting
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 200 mm
- Hinged front control panel, allows easy access to the condenser unit
- **Monoblock** refrigeration system: condenser unit + evaporator
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero GWP and zero ODP
- **CO-PF85**: 85 mm insulation
- **CO-PF**: 60 mm insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- **CO-AGR-PF / CO-PF85**: operating ambient temperature 16°C to 43°C

CO-AGR / CO-ACG: Puerta inox - solid door

CO-AGRE: Puerta doble cristal - double glazed door

Opciones - Options

hidrocarburo	hydrocarbon
parrilla adicional GN 2/1	GN 2/1 extra shelf
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

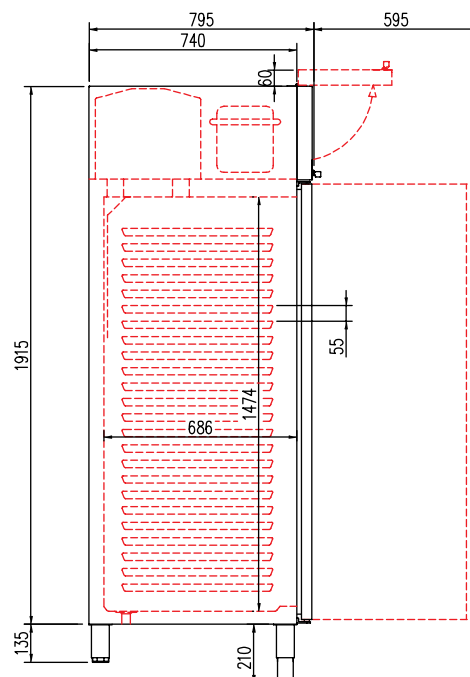

MONOBLOCK



85/60mm

aislamiento
insulation



CO-AGR-751-PF85

Electrónica alto rendimiento
High performance electronic system



Interior redondeado con desagüe
Rounded corners and drain




Contrapuerta embutida
Press-formed rear side door



Modelos PF85 models

Aislamiento 40 Kg/cm³ x 85 mm
40 Kg / cm³ x 85 mm insulation





CO-AGR-1002-PF

CO-AGM-1002-PF

CO-ACG-1002-PF

CO-AGRE-1002-PF

Dos cámaras capacidad GN 2/1 de funcionamiento y temperaturas independientes
Two compartments, capacity GN 2/1 that operate independently and at different temperatures

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	niveles levels	tensión monofásica single phase voltage	refrigerante coolant
CO-AGR/CO-AGRE-1002-PF	(-2°C+8°C)+(-2°C+8°C)	1295	2060	800	356+356	430+430	610+610	6	48	230V - 50 Hz	R-134a + R-134a
CO-AGR/CO-AGRE-1002-PF	(-2°C+8°C)+(-2°C+8°C)	1295	2060	800	356+356	470+470	610+610	6	48	230V - 50 Hz	R-134a + R-134a
CO-ACG-1002-PF	(-20°C-15°C)+(-20°C-15°C)	1295	2060	800	450+450	840+840	610+610	6	48	230V - 50 Hz	R-404A + R404A
CO-AGM-1002-PF	(-2°C+8°C)+(-20°C-15°C)	1295	2060	800	356+450	430+840	610+610	6	48	230V - 50 Hz	R-134a + R404A

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Costados en acero inox AISI-304-con 24 embuticiones por puerta para apoyo de parrillas y cubetas GN 1/1 o GN 2/1
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Cerradura con llave, de serie
- Luz interior LED
- Estantes interiores GN 2/1, de alambre en acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos elevable para acceso a unidad condensadora
- Sistema frigorífico **monobloque**, evaporador + unidad condensadora
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche del evaporador
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero GWP y cero ODP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía

CO-AGR / CO-ACG: Puerta inox - solid door


CO-AGRE: Puerta doble cristal - double glazed door

Opciones - Options

hidrocarburo	hydrocarbon
parrilla adicional GN 2/1	GN 2/1 extra shelf
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- AISI-304 stainless steel inner sides, 24 press-formed supports for GN 2/1 containers or shelves
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- LED lighting
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 200 mm
- Hinged front control panel, allows easy access to the condenser unit
- **Monoblock** refrigeration system: condenser unit + evaporator
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero GWP and zero ODP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption

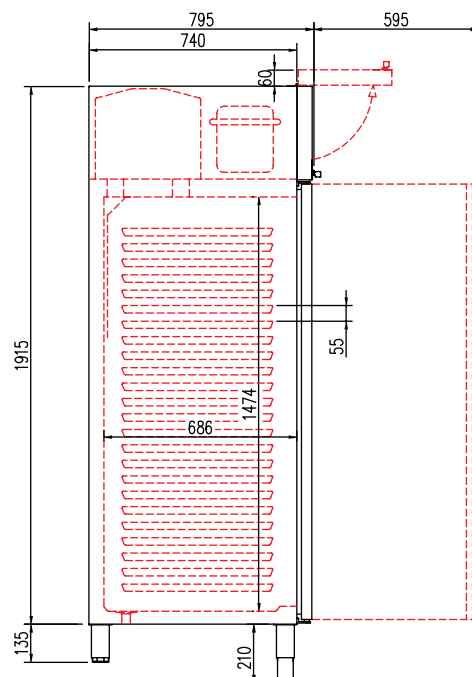

MONOBLOCK



CO-AGR-1002-PF

Electrónica alto rendimiento
High performance electronic system



Interior redondeado con desagüe
Rounded corners and drain



Contrapuerta embutida
Press-formed rear side door





CO-AGR-751		CO-AGR-752	
CO-ACG-751		CO-ACG-752	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
CO-AGR-750	-2°C+8°C	695	2130	840	356	430	610	3	3	230V - 50 Hz	R-134a
CO-ACG-750	-20°C-15°C	695	2130	840	450	840	610	3	3	230V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave, de serie
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores GN 2/1, de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Control digital de temperatura y descarches
- Temperatura de trabajo a 38°C ambiente

We reserve the right to change specifications without prior notice.


- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Key lock as standard
- Inner side of doors by stamped steel
- Interior LED lighting
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient

Opciones - Options

parrilla adicional GN 2/1	GN 2/1 extra shelf
set adicional guías GN 2/1	GN 2/1 slides extra set
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
hidrocarburo	hydrocarbon



pre-instalación remote compressor consultar - consult

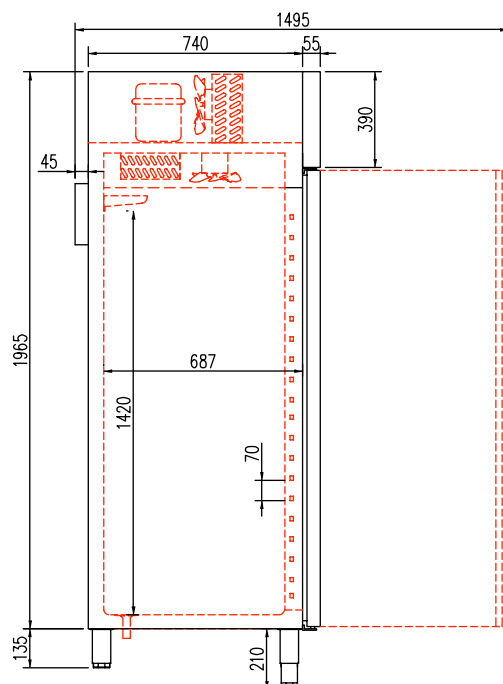



CO-AGR-751





CO-AGR-1002	
CO-ACG-1002	

CO-AGR-1003	
CO-ACG-1003	

CO-AGR-1004	
CO-ACG-1004	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
CO-AGR-1000	-2°C+8°C	1390	2130	840	590	540	1330	6	6	230V - 50 Hz	R-134a
CO-ACG-1000	-20°C-15°C	1390	2130	840	960	1250	1330	6	6	230V - 50 Hz	R-404a

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave, de serie
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores GN 2/1 de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

We reserve the right to change specifications without prior notice.


- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- Inner side of doors by stamped steel
- Interior LED lighting
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient

Opciones - Options

parrilla adicional GN 2/1	GN 2/1 extra shelf
set adicional guías GN 2/1	GN 2/1 slides extra set
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
hidrocarburo	hydrocarbon



pre-instalación remote compressor consultar - consult

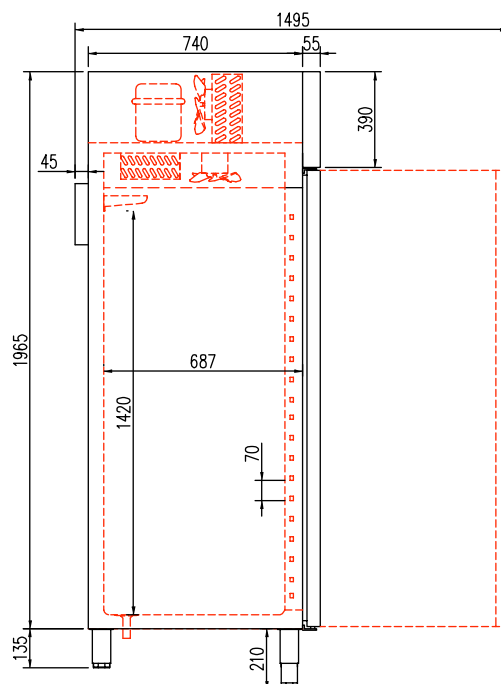



CO-AGR-1002





CO-AGR-2003		CO-AGR-2004		CO-AGR-2005		CO-AGR-2006	
CO-ACG-2003		CO-ACG-2004		CO-ACG-2005		CO-ACG-2006	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
CO-AGR-2000	-2°C+8°C	2090	2050	840	1174	850	1990	9	9	230V - 50 Hz	R-134a
CO-ACG-2000	-20°C-15°C	2090	2050	840	1050	1560	1990	9	9	230V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave, de serie
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores GN2/1 de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo: **AGR-2000 38°C ACG-2000 32°C**

We reserve the right to change specifications without prior notice.


- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- Inner side of doors by stamped steel
- Interior LED lighting
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature: **AGR-2000 38°C ACG-2000 32°C**

Opciones - Options

parrilla adicional GN 2/1	GN 2/1 extra shelf
set adicional guías GN 2/1	GN 2/1 slides extra set
barras carniceras	bars for meat set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
hidrocarburo	hydrocarbon



pre-instalación remote compressor consultar - consult

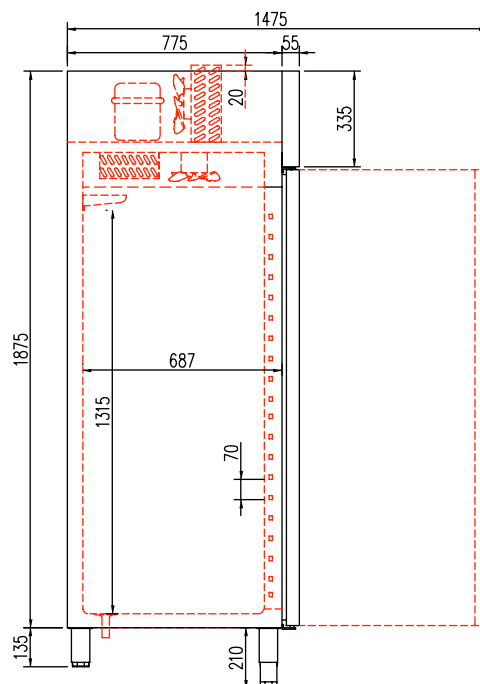



CO-ACG-2003





CO-AGR-751-SD

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
CO-AGR-751-SD	-2°C+8°C	695	1970	840	356	430	610	3	3	230V - 50 Hz	R-134a

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave, de serie
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores GN 2/1, de alambre en acero plastificado, regulables en altura
- Ruedas de serie (2 con freno + 2 sin freno)
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Control digital de temperatura y descarches
- Temperatura de trabajo a 38°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Key lock as standard
- Inner side of doors by stamped steel
- Interior LED lighting
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- Castors as standard (2 with brakes + 2 without)
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient

Opciones - Options

parrilla adicional GN 2/1	GN 2/1 extra shelf	48 € x ud
set adicional guías GN 2/1	GN 2/1 slides extra set	27 € x set
barras carniceras	bars for meat set	62 € x set
registrador de alarmas HACCP	HACCP alarm recorder	261 € x set
respaldo inox	stainless steel rear side	consultar - consult
tropicalizado 43°C	tropicalized to 43°C	consultar - consult
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz	consultar - consult
hidrocarburo	hydrocarbon	consultar - consult

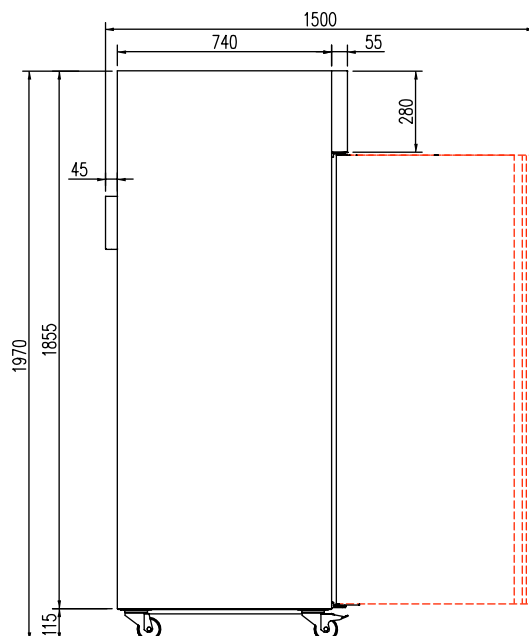



CO-AGR-751-SD





CO-AGRE-751	
CO-ACGE-751	

CO-AGRE-1002	
CO-ACGE-1002	

CO-AGRE-2003	
CO-ACGE-2003	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
CO-AGRE-751	-2°C+8°C	695	2130	840	356	470	610	4	4	230V - 50 Hz	R-134a
CO-ACGE-751	-20°C-15°C	695	2130	840	450	880	610	4	4	230V - 50 Hz	R-404a
CO-AGRE-1002	-2°C+8°C	1390	2130	840	590	620	1330	8	8	230V - 50 Hz	R-134a
CO-ACGE-1002	-20°C-15°C	1390	2130	840	960	1330	1330	8	8	230V - 50 Hz	R-404a
CO-AGRE-2003	-2°C+8°C	2090	2050	840	1174	970	1990	12	12	230V - 50 Hz	R-134a
CO-ACGE-2003	-20°C-15°C	2090	2050	840	1050	1680	1990	12	12	230V - 50 Hz	R-404a

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave, de serie
- Doble cristal + LEDS
- Estantes interiores GN 2/1 de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente


- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- Double glazed door + LEDS
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

Opciones - Options

parrilla reforzada botelleria	bottles reinforced shelf
parrilla adicional GN 2/1	GN 2/1 extra shelf
set adicional guías GN 2/1	GN 2/1 slides extra set
respaldo inox	stainless steel rear side
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
hidrocarburo	hydrocarbon



pre-instalación remote compressor consultar - consult

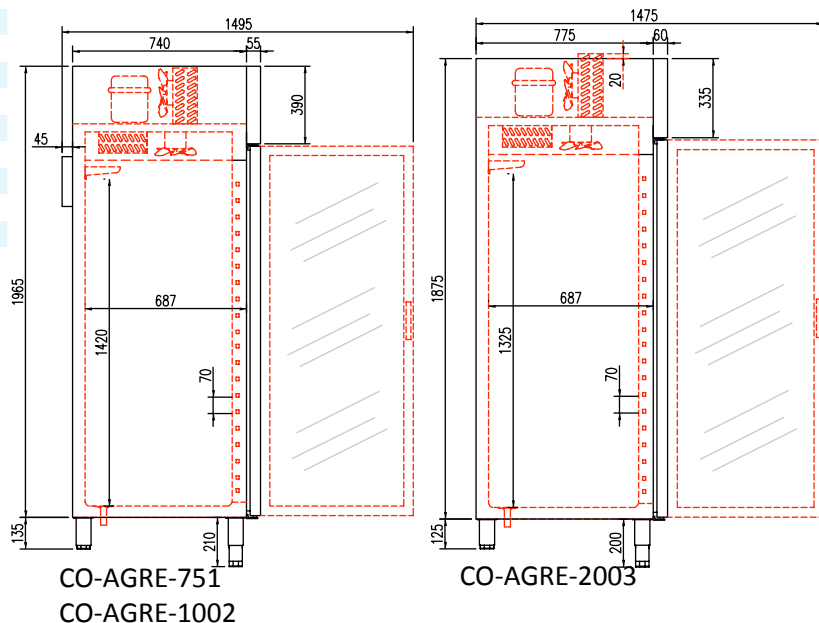



CO-AGRE-2003



CO-AGRE-1002



CO-AGRE-751





CO-AGR-1002/2

CO-AGP-1002

CO-AGM-1002

Dos cámaras capacidad GN 2/1 de funcionamiento y temperaturas independientes
Two compartments, capacity GN 2 / 1 that operate independently and at different temperatures

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	cajones drawers	tensión monofásica single phase voltage	refrigerante coolant
CO-AGR-1002/2	(-2°C+8°C)+(-2°C+8°C)	1390	2130	840	356+356	430+430	610+610	6	6	0	230V - 50 Hz	R-134a + R-134a
CO-AGP-1002	(-2°C+8°C)+(-4°C+4°C)	1390	2130	840	356+470	430+510	610+610	3	9	6	230V - 50 Hz	R-134a + R-134a
CO-AGM-1002	(-2°C+8°C)+(-20°C-15°C)	1390	2130	840	356+450	430+840	610+610	6	6	0	230V - 50 Hz	R-134a + R404A

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave de serie
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores GN 2/1 de alambre en acero plastificado, regulables en altura,
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Dos unidades condensadoras ventiladas
- Evaporadores sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- Inner side of doors by stamped steel
- LED lighting LED
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Two fan assisted condenser unit
- Fan assisted evaporators, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient

Opciones - Options

parrilla adicional GN 2/1	GN 2/1 extra shelf
set adicional guías GN 2/1	GN 2/1 slides extra set
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
hidrocarburo	hydrocarbon

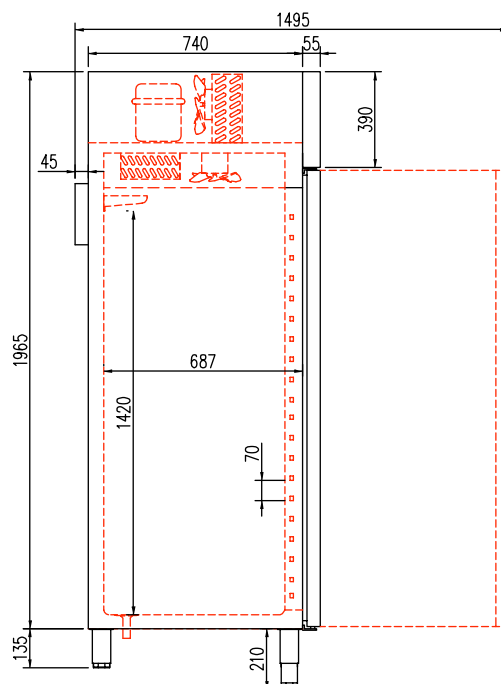



CO-AGR-1002/2





CO-AGP-752

CO-AGP-1003

CO-AGP-1004

CO-AGP-2003

CO-AGP-2004

CO-AGP-2005

Dos cámaras de funcionamiento y temperaturas independientes
Two compartments, that operate independently and at different temperatures

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	cajones drawers	tensión monofásica single phase voltage	refrigerante coolant
CO-AGP-750	(-2°C+8°C)+(-4°C+4°C)	695	2130	840	180+180	210+210	280+280	1	4	3	230V - 50 Hz	R-134a
CO-AGP-1000	(-2°C+8°C)+(-4°C+4°C)	1390	2130	840	590+180	540+210	1050+280	4	7	3	230V - 50 Hz	R-134a
CO-AGP-2000	(-2°C+8°C)+(-4°C+4°C)	2090	2050	840	590+356	540+430	1300+610	6	12	6	230V - 50 Hz	R-134a

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave, de serie
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores GN 2/1 de alambre en acero plastificado, regulables en altura,
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente
- Departamento de pescado
- Evaporador estático, con recubrimiento epoxi anticorrosión
- Motor independiente
- Temperatura de trabajo -4°C +4°C a 38°C ambiente
- 3 contenedores plástico con doble fondo, sobre guías inox

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- Inner side of doors by stamped steel
- Interior LED lighting
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient
- Fish department
- Static evaporator, with epoxi anticorrosion coating.
- Independent refrigerating units for each department
- Operating temperature -4°C +4°C, 38°C ambient
- 3 containers with stainless steel inserts in fish department

Opciones - Options

parrilla adicional GN 2/1	GN 2/1 extra shelf
set adicional guías GN 2/1	GN 2/1 slides extra set
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
hidrocarburo	hydrocarbon

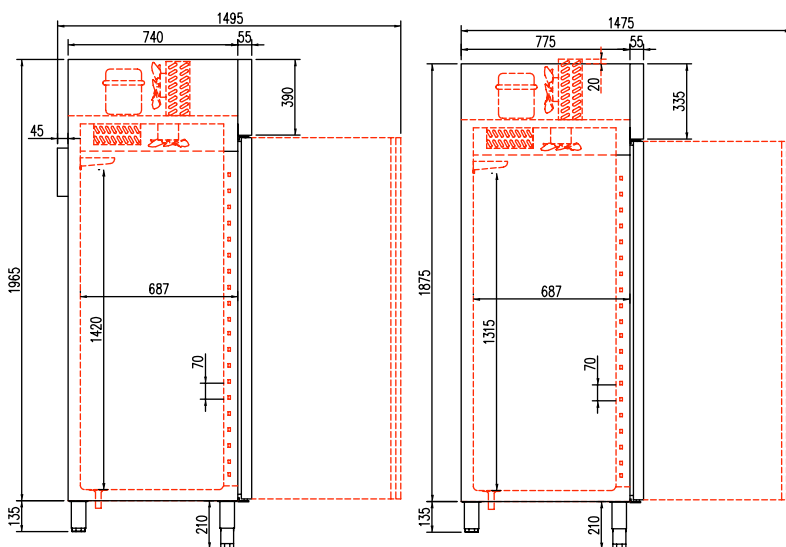

CO-AGP-752
CO-AGP-1003/1004

CO-AGP-2005



CO-AGP-1003



CO-AGP-752





CO-AGM-752		CO-AGM-1003		CO-AGM-1004		CO-AGM-2003	
						CO-AGM-2004	
						CO-AGM-2005	

Dos cámaras capacidad GN 2/1 de funcionamiento y temperaturas independientes
Two compartments, capacity GN 2/1 that operate independently and at different temperatures

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
CO-AGM-750	(-2°C+8°C)+(-20°C-15°C)	695	2130	840	180+258	210+530	280+280	2	2	230V - 50 Hz	R-134a
CO-AGM-1000	(-2°C+8°C)+(-20°C-15°C)	1390	2130	840	590+258	540+530	1050+280	5	5	230V - 50 Hz	R-134a
CO-AGM-2000	(-2°C+8°C)+(-20°C-15°C)	2100	2130	840	590+450	540+840	1300+610	9	9	230V - 50 Hz	R-134a

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Modelo 1000: cerradura con llave de serie
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores GN 2/1 de alambre en acero plastificado, regulables en altura,
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente
- Departamento de congelados
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Motor independiente
- Temperatura de trabajo -20°C -15°C a 38°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Model 1000: key lock as standard
- Inner side of doors by stamped steel
- Interior LED lighting
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient
- Freezer department
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Independent refrigerating units for each department
- Operating temperature -20°C -15°C , 38°C ambient

Opciones - Options

parrilla adicional GN 2/1	GN 2/1 extra shelf
set adicional guías GN 2/1	GN 2/1 slides extra set
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
hidrocarburo	hydrocarbon

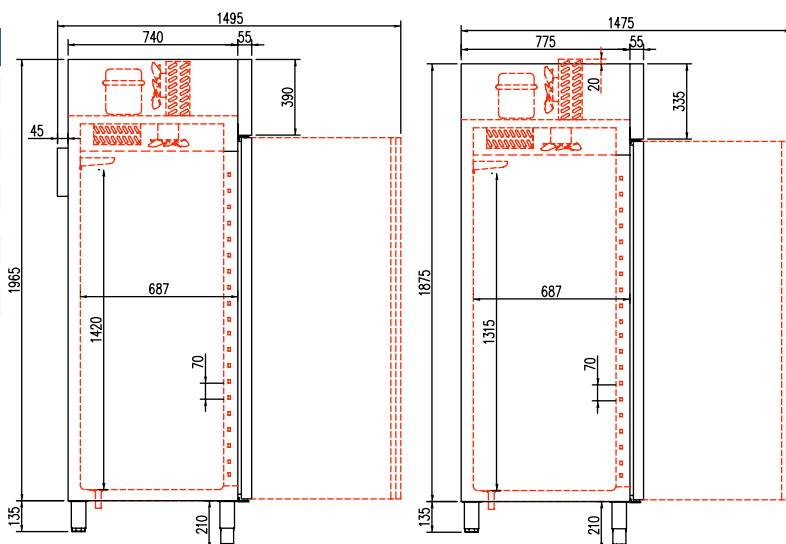

CO-AGM-752
CO-AGM-1003/1004

CO-AGM-2005



CO-AGM-1003



CO-AGM-752



GN 1/1



GN 1/1 + GN 2/1



CO-AGR-50	
CO-AGRE-50	

CO-ACG-50	
CO-ACGE-50	

CO-ACG-125	
CO-ACGE-125	

CO-AGR-125	
CO-AGRE-125	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
CO-AGR / CO-AGRE-50	-2°C+8°C	460	2075	665	300	395	240	3 / 4	3 / 4	230V - 50 Hz	R-134a
CO-ACG / CO-ACGE-50	-20°C-15°C	460	2075	665	295	750	240	3 / 4	3 / 4	230V - 50 Hz	R-404A
CO-AGR / CO-AGRE-125	-2°C+8°C	1250	2075	665	356	480	750	6 / 8	6 / 8	230V - 50 Hz	R-134a
CO-ACG / CO-ACGE-125	-20°C-15°C	1250	2075	665	546	941	750	6 / 8	6 / 8	230V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave de serie
- CO-AGRE / CO-ACGE doble cristal + LEDS
- Estantes interiores GN, de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- CO-AGRE / CO-ACGE double glazed door + LEDS
- GN shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

Opciones - Options

parrilla adicional GN 2/1	GN 2/1 extra shelf
parrilla adicional GN 1/1	GN 1/1 extra shelf
set adicional guías GN	GN slides extra set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
tropicalizado 43°C	tropicalized to 43°C
respaldo inox	stainless steel rear side
hidrocarburo	hydrocarbon

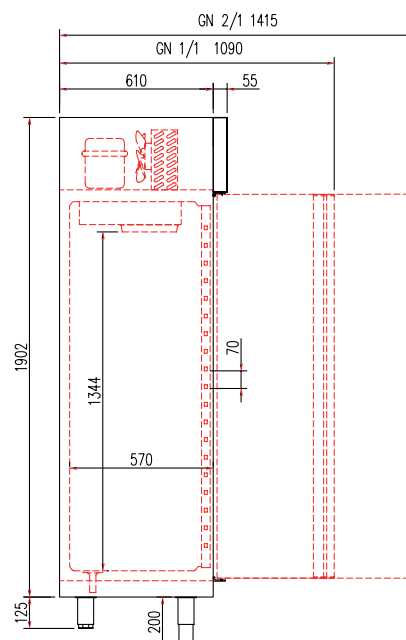



GN 1/1

GN 2/1

CO-AGR-125



CO-AGRE-50 (GN 1/1)



CO-AGRE-125



CO-RVGI-500		CO-RVGE-500	1.422 €
CO-CVGI-500		CO-CVGE-500	1.954 €

CO-RVGI-600		CO-RVGE-600	
CO-CVGI-600		CO-CVGE-600	

mod.	rango range	largo length (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	niveles max max levels	estantes shelves	tensión monofásica single phase voltage	refrigerante coolant
CO-RVG-500	-2°C+8°C	755	300	418	495	15	2	230V - 50 Hz	R-134a
CO-RVG-600	-2°C+8°C	755	300	418	605	18	3	230V - 50 Hz	R-134a
CO-CVG-500	-20°C-15°C	755	450	670	495	15	2	230V - 50 Hz	R-404A
CO-CVG-600	-20°C-15°C	755	450	670	605	18	3	230V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

- **CO-RVGI, CO-CVGI:** Exterior en acero satinado, excepto el respaldo
- **CO-RVGE, CO-CVGE:** Exterior en acero plastificado blanco, excepto el respaldo
- Interior en poliestireno sanitario
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Estantes interiores GN 2/1 de alambre en acero plastificado,
- Unidad condensadora libre de mantenimiento
- Evaporador sistema placa fría con ventilador y recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura ambiente de trabajo: **RVGI** 38°C **CVGI** 32°C
- Cerradura de serie


- **CO-RVGI, CO-CVGI:** Stainless steel exterior, rear side galvanized panel
- **CO-RVGE, CO-CVGE:** Exterior in white plastic coated steel, rear side galvanized panel
- Interior of polystyrene, with health certification
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- Condenser unit without maintenance
- Fan assisted cold plate evaporator with epoxi anticorrosion coating
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarms. Efficient management of energy consumption
- Operating ambient temperature: : **RVGI** 38°C **CVGI** 32°C
- Integrated lock as standard

230v 60Hz / 115v 60Hz

consultar - consult

hidrocarburo - hydrocarbon

consultar - consult

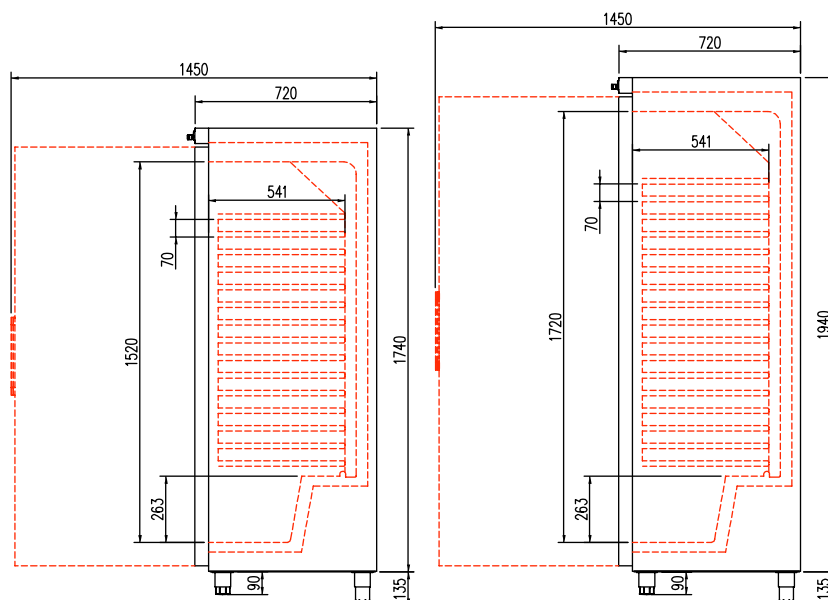



RVGI-600



RVGE-500



CO-AP-750

CO-AP-1002

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	cajones containers	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
CO-AP-750	-4°C+4°C	695	2130	840	470	474	610	7	7	230V - 50 Hz	R-134a
CO-AP-1002	-4°C+4°C	1395	2130	840	682	676	1330	14	14	230V - 50 Hz	R-134a

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave de serie
- Contrapuerta inox embutida
- Luz interior LED
- Interior con guías de acero inox, regulables en altura para parrillas, bandejas o contenedores 60x40
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente


We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- Inner side of doors by stamped steel
- LED lighting
- Capacity for 60x40 shelves, containers or trays by stainless steel slides, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient

Opciones - Options

cerradura puerta inox	solid door lock
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
tropicalizado 43°C	tropicalized to 43°C
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
hidrocarburo	hydrocarbon

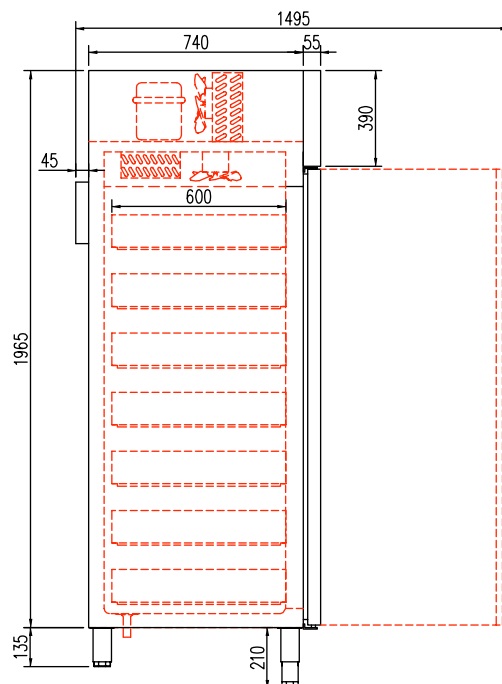



CO-AP-1002



CO-AP-750





CO-APR-750		CO-APR-1002		CO-APR-1003		CO-APR-1004	
CO-APRV-750		CO-APRV-1002					
CO-APC-750		CO-APCV-750		CO-APC-1002		CO-APCV-1002	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
CO-APR/CO-APRV-750	-2°C+8°C	695	2130	840	356	430	610	20	230V - 50 Hz	R-134a
CO-APR/CO-APRV-1002	-2°C+8°C	1395	2130	840	590	540	1330	40	230V - 50 Hz	R-134a
CO-APC-750	-20°C-15°C	695	2130	840	450	540	610	20	230V - 50 Hz	R-404A
CO-APC-1002	-20°C-15°C	1395	2130	840	960	1250	1330	40	230V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.


We reserve the right to change specifications without prior notice.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- **APRV**: puerta marco de aluminio con cristal doble + LEDS
- Cerradura con llave, de serie
- Contrapuerta inox embutida
- Luz interior LED
- Interior con guías de acero inox, regulables en altura cada 60 mm para parrillas, bandejas o contenedores 60x40
- Bajo pedido, se puede adaptar a bandejas 60x45
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- **APRV**: double glazed door on aluminium frame and LED lighting
- Key lock as standard
- Inner side of doors by stamped steel
- LED lighting
- Capacity for 60x40 shelves, containers or trays by stainless steel slides, 60 mm height adjustable
- On demand can be adapted for 60x45 trays
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient

Opciones - Options

set adicional guías 60x40	60x40 slides extra set
parrilla 60x40	60x40 shelf
set para parrillas 45x60	45x60 set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
tropicalizado 43°C	tropicalized to 43°C
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
hidrocarburo	hydrocarbon

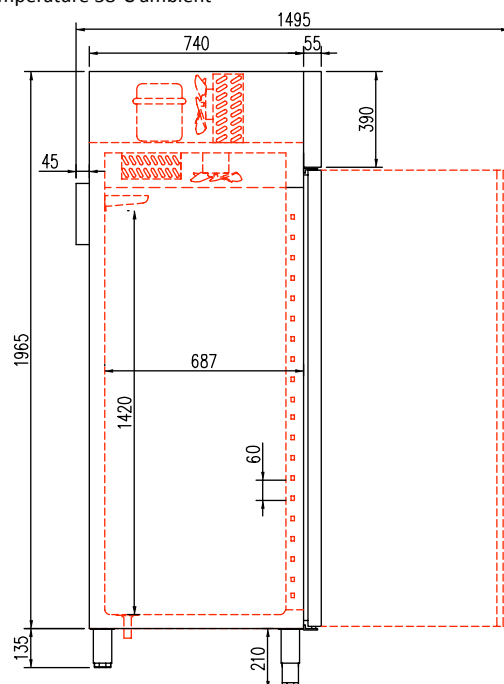



CO-APR-1002

CAPACIDAD 60x40, OPCIONAL 60x45
60x40 CAPACITY, 60x45 OPTIONAL



CO-APRV-750





CO-AP-55



CO-APR-55



CO-APRV-55

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	capacidad capacity (L)	potencia frig. frig. power (W)	consumo consumption (W)	pares de guías sets of slides	cajas containers	estantes shelves	tensión monofásica single phase voltage	refrigerante coolant
CO-AP-55	0°C+4°C	540	2075	730	340	300	395	7	7x60-40		230V - 50 Hz	R-134a
CO-APR-55	0°C+8°C	540	2075	730	340	300	395	17		3x60-40	230V - 50 Hz	R-134a
CO-APRV-55	0°C+8°C	540	2075	730	340	300	395	17		3x60-40	230V - 50 Hz	R-134a

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- **APRV** doble cristal
- Luz interior LED
- Interior con guías de acero inox, regulables en altura para parrillas, bandejas o contenedores 60x40
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- **APRV** double glazed door
- Interior LED lighting
- Capacity for 60x40 shelves, containers or trays by stainless steel slides, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

Opciones - Options

set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
tropicalizado 43°C	tropicalized to 43°C
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
hidrocarburo	hydrocarbon

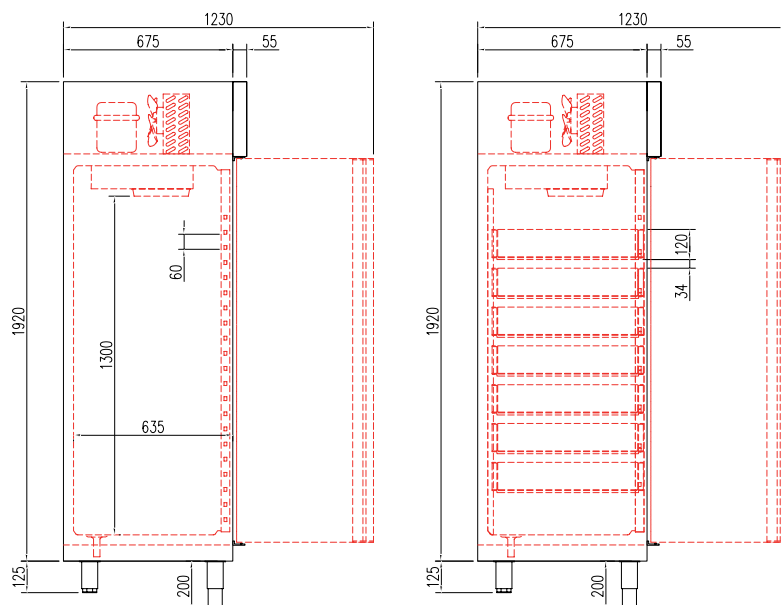



CO-APR-55



CO-AP-55



CO-APRV-55





CO-AER-401		CO-AER-402		CO-AERE-401		CO-AP-400	
CO-AEC-401		CO-AEC-402		CO-AECE-401			

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	tensión monofásica single phase voltage	refrigerante coolant
CO-AER-400	-2°C+8°C	600	1900	650	300	410	400	3	230V - 50 Hz	R-134a
CO-AEC-400	-20°C-15°C	600	1900	650	450	840	400	3	230V - 50 Hz	R-404A
CO-AERE-400	-2°C+8°C	600	1900	650	300	450	400	4	230V - 50 Hz	R-134a
CO-AECE-400	-20°C-15°C	600	1900	650	450	890	400	4	230V - 50 Hz	R-404A
CO-AP-400	-4°C+4°C	600	1900	650	300	410	400	5 contenedores	230V - 50 Hz	R-134a

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo: AER / AEC / AP 38°C AERE / AECE 32°C

CO-AP-400: Contenedores plásticos 410x460x150 sobre estantes de alambre en acero plastificado

CO-AERE /CO- AECE: doble cristal + LEDS

We reserve the right to change specifications without prior notice.


- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature : AER / AEC / AP 38°C AERE / AECE 32°C

CO-AP-400: Plastic containers 410x460x150 on shelves

CO-AERE /CO- AECE: double glazed door + LEDS

Opciones - Options

parrilla reforzada botellería	bottles reinforced shelf
parrilla estándar	standard shelf
cerradura puerta inox	solid door lock
barras carniceras (AP no disponible)	bars for meat (AP not available)
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

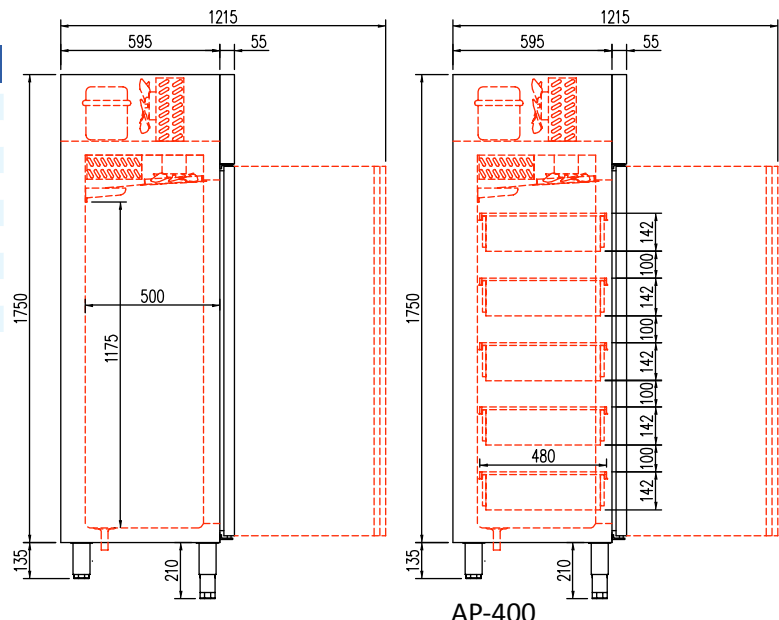

AP-400



CO-AER-401



CO-AERE-401



CO-AP-400
apertura mano izquierda opcional
left hand open sense door, optional





CO-AER-125-2	
CO-AER-125-3	
CO-AER-125-4	
CO-AEC-125-2	
CO-AEC-125-3	
CO-AEC-125-4	

CO-AEM-125	
------------	--

CO-AERE-125	
CO-AECE-125	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
CO-AER / CO-AERE-125	-2°C+8°C	1250	2075	665	356	480	750	6 / 8	6 / 8	230V - 50 Hz	R-134a
CO-AEC / CO-AECE-125	-20°C-15°C	1250	2075	665	546	941	750	6 / 8	6 / 8	230V - 50 Hz	R-404a
CO-AEM-125	(-2°C+8°C) + (-20°C-15°C)	1250	2075	665	300+295	396+750	340+350	6	6	230V - 50 Hz	R-134a+R404A

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- **AERE / AECE** doble cristal
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- **AERE / AECE** double glazed door
- LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI-304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

Opciones - Options

parrilla adicional	extra shelf
set adicional guías	slides extra set
cerradura puerta inox	solid door lock
cerradura puerta cristal	glass door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
tropicalizado 43°C	tropicalized to 43°C
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

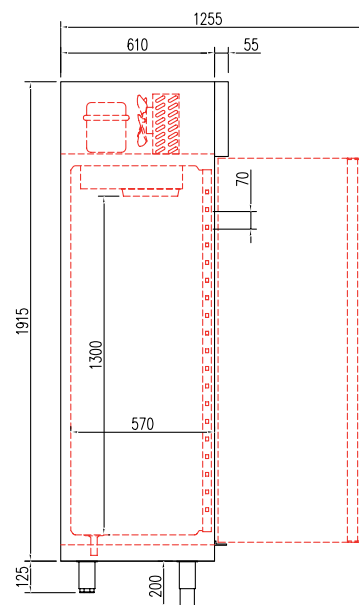



CO-AER-125



CO-AERE-125



CO-ACR-751	
CO-ACC-751	

CO-ACR-752	
CO-ACC-752	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	tensión monofásica single phase voltage	refrigerante coolant
CO-ACR-750	-2°C+8°C	695	2115	730	356	334	520	3	230V - 50 Hz	R-134a
CO-ACC-750	-20°C-15°C	695	2115	730	450	760	520	3	230V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

We reserve the right to change specifications without prior notice.


- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient

Opciones - Options

parrilla adicional	extra shelf
cerradura puerta inox	solid door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz



pre-instalación remote compressor consultar - consult

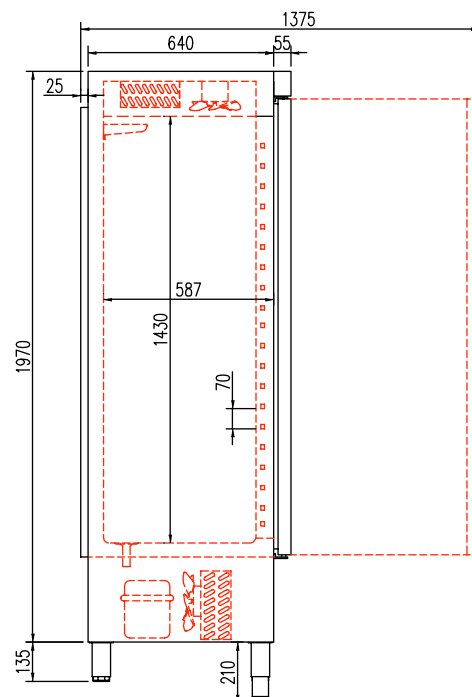



CO-ACR-751

Cerradura opcional
Lock as option





CO-ACR-1302	
CO-ACC-1302	

CO-ACR-1303	
CO-ACC-1303	

CO-ACR-1304	
CO-ACC-1304	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	tensión monofásica single phase voltage	refrigerante coolant
CO-ACR-1300	-2°C+8°C	1390	2115	730	590	430	1130	6+3	230V - 50 Hz	R-134a
CO-ACC-1300	-20°C-15°C	1390	2115	730	861	1070	1130	6+3	230V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

We reserve the right to change specifications without prior notice.


- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient

Opciones - Options

parrilla adicional	extra shelf
parrilla intermedia adicional	extra middle shelf
cerradura puerta inox	solid door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz



pre-instalación remote compressor consultar - consult

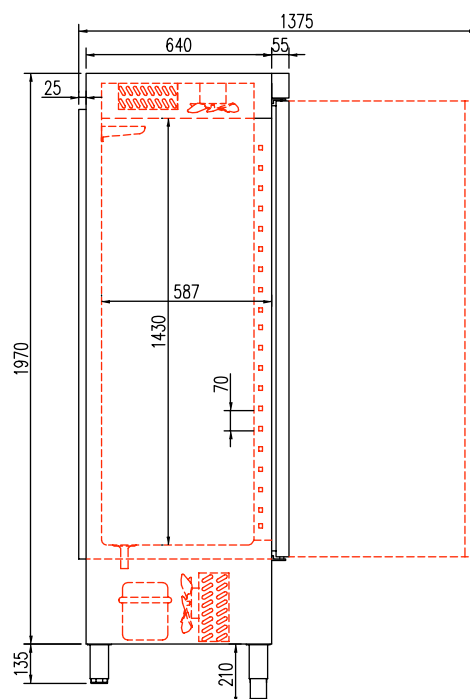



CO-ACR-1304

Cerradura opcional
Lock as option





CO-ACR-2003	
CO-ACC-2003	

CO-ACR-2004	
CO-ACC-2004	

CO-ACR-2005	
CO-ACC-2005	

CO-ACR-2006	
CO-ACC-2006	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	tensión monofásica single phase voltage	refrigerante coolant
CO-ACR-2000	-2°C+8°C	2090	2100	730	1174	735	1750	9	230V - 50 Hz	R-134a
CO-ACC-2000	-20°C-15°C	2090	2100	730	1050	1480	1750	9	230V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.


- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI-304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

Opciones - Options

parrilla adicional	extra shelf
parrilla intermedia adicional	extra middle shelf
cerradura puerta inox	solid door lock
barras carniceras	bars for meat set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz



pre-instalación remote compressor consultar - consult

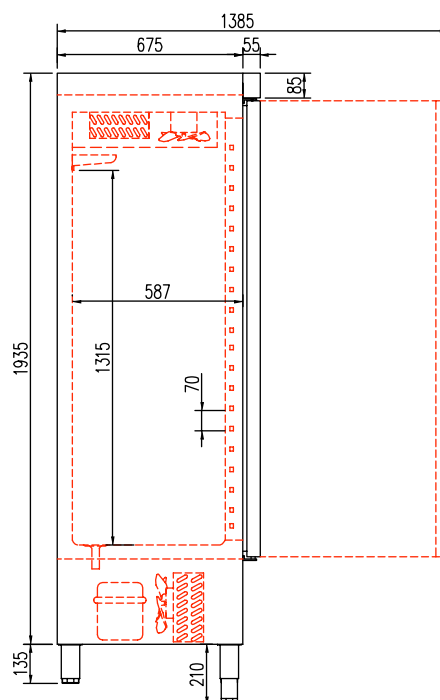



ACC-2006

Cerradura opcional
Lock as option





CO-ACRV-751		CO-ACRV-1302		CO-ACRV-2003	
CO-ACCV-751		CO-ACCV-1302		CO-ACCV-2003	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	tensión monofásica single phase voltage	refrigerante coolant
CO-ACRV-751	-2°C+8°C	695	2115	730	356	362	520	4	230V - 50 Hz	R-134a
CO-ACRV-1302	-2°C+8°C	1390	2115	730	560	572	1130	8+4	230V - 50 Hz	R-134a
CO-ACRV-2003	-2°C+8°C	2090	2100	730	1174	800	1750	12+8	230V - 50 Hz	R-134a
CO-ACCV-751	-20°C-15°C	695	2115	730	450	774	520	4	230V - 50 Hz	R-404A
CO-ACCV-1302	-20°C-15°C	1390	2115	730	861	1110	1130	8+4	230V - 50 Hz	R-404A
CO-ACCV-2003	-20°C-15°C	2090	2100	730	1050	1582	1750	12+8	230V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Doble cristal + LEDS
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Double glazed door + LEDS
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

Opciones - Options

parrilla reforzada botelleria	bottles reinforced shelf
parrilla adicional	extra shelf
parrilla intermedia adicional	extra middle shelf
cerradura puerta cristal	glass door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

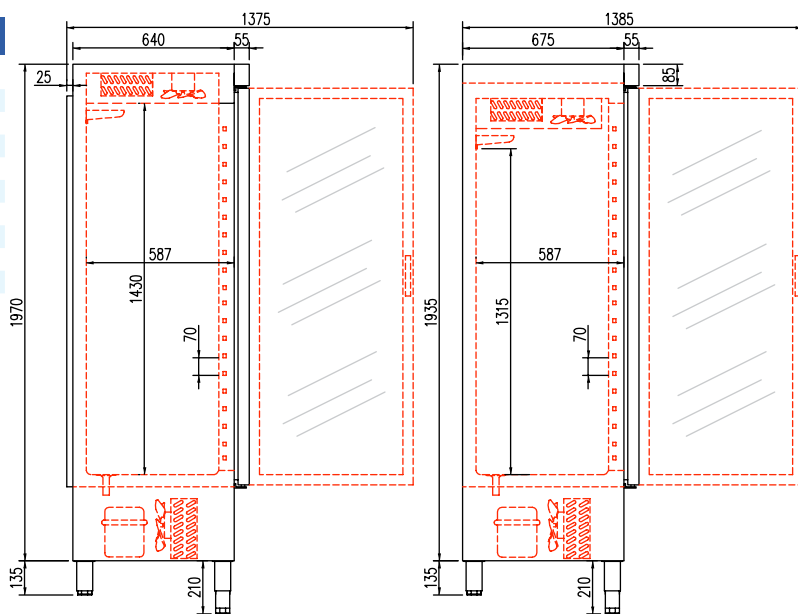

CO-ACRV-751
CO-ACRV-1302

CO-ACRV-2003

pre-instalación remote compressor consultar - consult



CO-ACRV-1302



CO-ACRV-751



CO-ACR-1302/2

CO-ADP-1302

CO-ACM-1302

Dos cámaras, de funcionamiento y temperaturas independientes
Two compartments, that operate independently and at different temperatures

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	cajones drawers	tensión monofásica single phase voltage	refrigerante coolant
CO-ACR-1302/2	(-2°C+8°C)+(-2°C+8°C)	1390	2115	730	356+356	334+334	510+510	6	0	230V - 50 Hz	R-134a + R-134a
CO-ADP-1302	(-2°C+8°C)+(-4°C+4°C)	1390	2115	730	356+450	334+400	510+510	3	6	230V - 50 Hz	R-134a + R-134a
CO-ACM-1302	(-2°C+8°C)+(-20°C-15°C)	1390	2115	730	356+450	334+720	510+510	6	0	230V - 50 Hz	R-134a + R404A

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura,
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Dos unidades condensadoras ventiladas
- Evaporadores sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Two fan assisted condenser unit
- Fan assisted evaporators, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient

Opciones - Options

parrilla adicional	extra shelf
parrilla intermedia adicional	extra middle shelf
cerradura puerta inox	solid door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

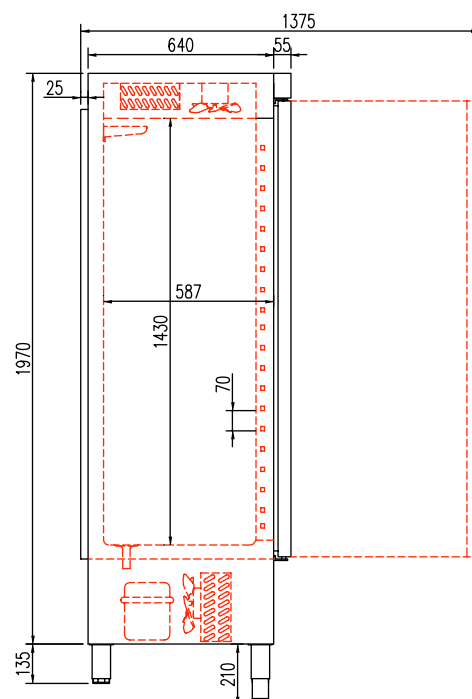



CO-ACR-1302/2

Cerradura opcional
Lock as option





CO-ADP-1303

CO-ADP-1304

CO-ADP-2004

CO-ADP-2005

CO-ADP-2006

Dos cámaras, de funcionamiento y temperaturas independientes
Two compartments, that operate independently and at different temperatures

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	cajones drawers	tensión monofásica single phase voltage	refrigerante coolant
CO-ADP-1300	(-2°C+8°C)+(-4°C+4°C)	1390	2115	730	490+180	420+210	880+250	4+1	3	3	230V - 50 Hz	R-134a
CO-ADP-2000	(-2°C+8°C)+(-4°C+4°C)	2090	2100	730	590+470	704+400	1130+520	6+3	6	6	230V - 50 Hz	R-134a

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

Departamento de pescado

- Evaporador estático, con recubrimiento epoxi anticorrosión
- Motor independiente
- Temperatura de trabajo -4°C +4°C a 38°C ambiente
- Contenedores plástico, sobre guías inox


- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient

Fish door


- Static evaporator, with epoxi anticorrosion coating
- Independent refrigerating units for each department
- Operating temperature -4°C +4°C , 38°C ambient
- Plastic containers as standard, on stainless steel slides

Opciones - Options

parrilla adicional	extra shelf
parrilla intermedia adicional	extra middle shelf
cerradura puerta inox	solid door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

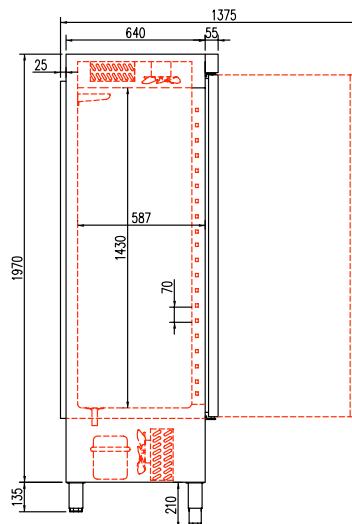

CO-ADP-752
CO-ADP-1303/1304

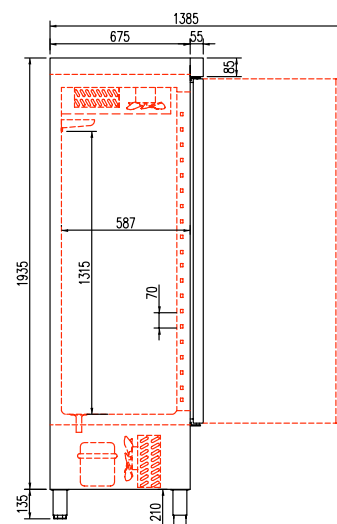

CO-ADP-2005



CO-ADP-1304

Cerradura opcional
Lock as option





CO-ACM-1303		CO-ACM-1304		CO-ACM-2004	
				CO-ACM-2005	
				CO-ACM-2006	

Dos cámaras, de funcionamiento y temperaturas independientes
Two compartments, that operate independently and at different temperatures

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	tensión monofásica single phase voltage	refrigerante coolant
CO-ACM-1300	(-2°C+8°C)+(-20°C-15°C)	1390	2115	730	490+258	420+380	880+355	5+1	230V - 50 Hz	R-134a
CO-ACM-2000	(-2°C+8°C)+(-20°C-15°C)	2090	2090	730	590+450	704+660	1130+520	9+3	230V - 50 Hz	R-134a

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Interior LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient

Low temperature door


- Fan assisted evaporator, with epoxi anticorrosion coating.
- Independent refrigerating units for each department
- Operating temperature -20°C -15°C , 38°C ambient

Departamento de congelados

- Evaporador sistema tiro forzado, con recubrimiento protector
- Motor independiente
- Temperatura de trabajo -20°C -15°C a 38°C ambiente

Opciones - Options

parrilla adicional	extra shelf
parrilla intermedia adicional	extra middle shelf
cerradura puerta inox	solid door lock
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

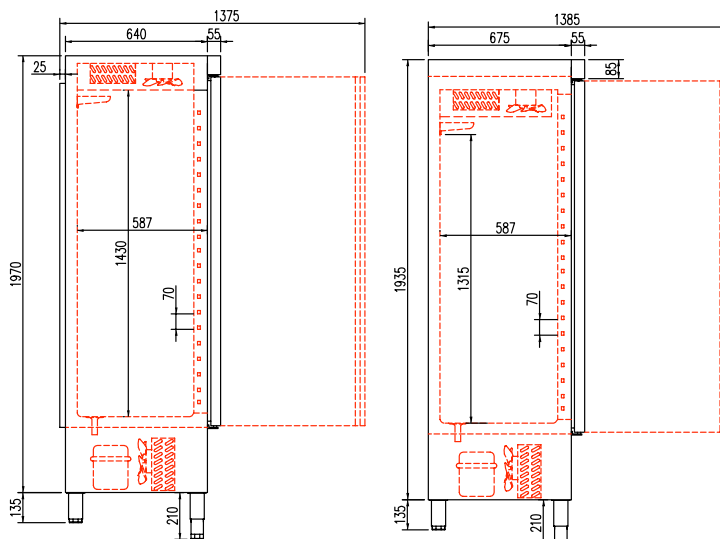

CO-ACM-752
CO-ACM-1303/1304

CO-ACM-2005



ACM-1304

Cerradura opcional
Lock as option





CO-ACR-55-1	
CO-ACC-55-1	



CO-ACR-55-2	
CO-ACC-55-2	



CO-ACRV-55	
CO-ACCV-55	



CO-ACR-125-2	
CO-ACC-125-2	



CO-ACR-125-3	
CO-ACC-125-3	



CO-ACR-125-4	
CO-ACC-125-4	



CO-ACM-125	
------------	--



CO-ACRV-125	
CO-ACCV-125	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
CO-ACR /CO- ACRV-55	-2°C+8°C	540	2075	730	300	395	340	3 / 4	3 / 4	230V - 50 Hz	R-134a
CO-ACC /CO- ACCV-55	-20°C-15°C	540	2075	730	295	750	340	3 / 4	3 / 4	230V - 50 Hz	R-404A
CO-ACR /CO- ACRV-125	-2°C+8°C	1250	2075	665	356	480	750	6 / 8	6 / 8	230V - 50 Hz	R-134a
CO-ACC /CO- ACCV-125	-20°C-15°C	1250	2075	665	546	941	750	6 / 8	6 / 8	230V - 50 Hz	R-404A
CO-ACM-125	(-2°C+8°C) + (-20°C-15°C)	1250	2075	665	300+295	396+750	340+350	6	6	230V - 50 Hz	R-134a+R404A

Características técnicas y constructivas sujetas a variación sin previo aviso.


We reserve the right to change specifications without prior notice.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- ACRV / ACCV doble cristal
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- ACRV / ACCV double glazed door
- LED lighting
- Shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

Opciones - Options

parrilla adicional	extra shelf	29 € x ud
set adicional guías	slides extra set	27 € x set
cerradura puerta inox	solid door lock	16 € x ud
cerradura puerta cristal	glass door lock	48 € x ud
barras carniceras	bars for meat set	62 € x set
set 4 ruedas	4 castors set	80 € x set
registrador de alarmas HACCP	HACCP alarm recorder	261 € x set
iluminación LEDS	LEDS lighting	consultar - consult
tropicalizado 43°C	tropicalized to 43°C	consultar - consult
respaldo inox	stainless steel rear side	consultar - consult
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz	consultar - consult

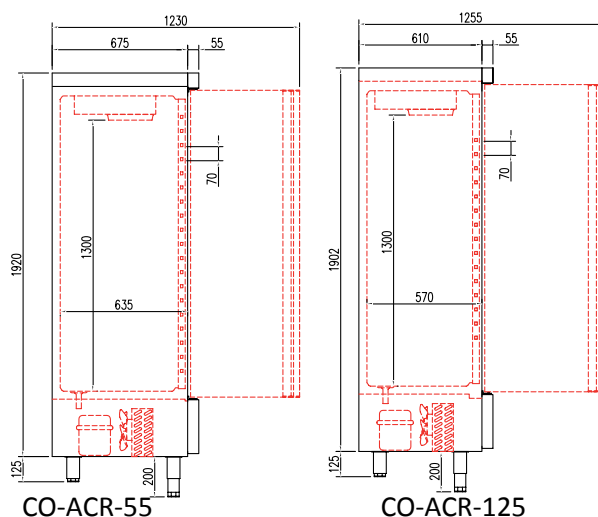



CO-ACR-125-3



CO-ACR-55-2



CO-ACRV-125