







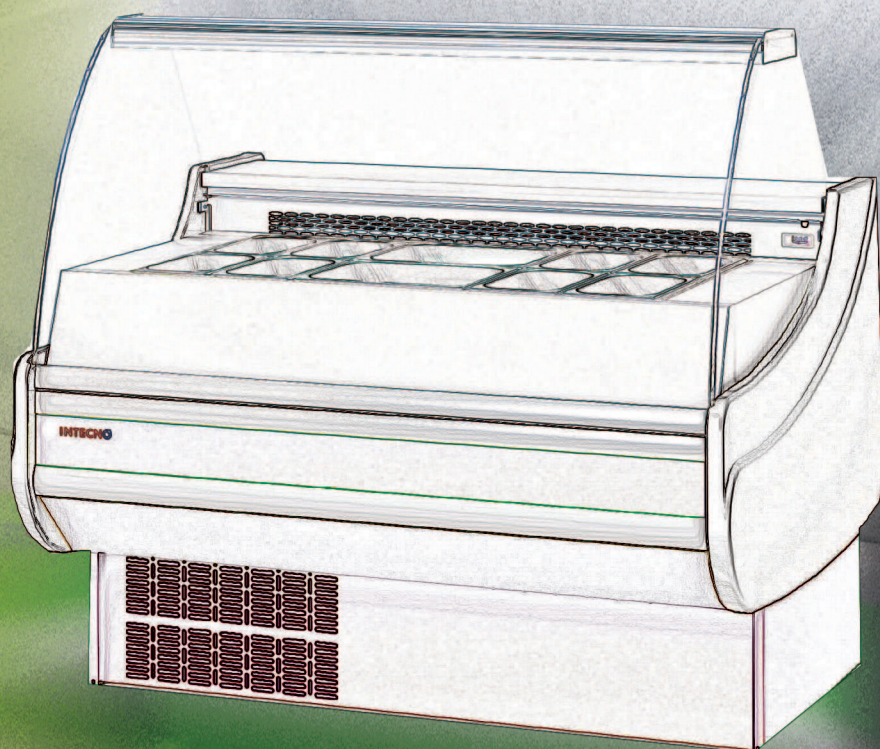

## VITRINAS EXPOSITORAS




*Vitrina expositora modular serie 8 con reserva* 4



*Vitrina expositora modular serie 9 con y sin reserva.* 10



*Vitrina expositora modular serie 9 PASTERIA con reserva.* 14



*Vitrina expositora modular serie 9 DELICATESSEN con reserva.* 18



*Vitrina expositora modular serie 9 FLAVOUR con reserva.* 22



*Vitrina expositora modular serie 9 SELECTA con y sin reserva.* 26




*Vitrina expositora modular serie 9 SELECTA PASTERIA con reserva* 28



*Vitrina expositora modular serie 9 AUTOSERVICIO, con reserva.* 34



*Vitrina expositora modular serie 9, alojamientos cubetas GN.* 36



*Vitrina caliente expositora modular serie 9, calor seco o baño maría.* 38



*Vitrina expositora especial pescado serie 9* 40



*Vitrina expositora modular serie 10 con y sin reserva.* 42




*Vitrina expositora modular serie 10 supermercado, con y sin reserva.* 44



*Vitrina expositora modular serie 10 cristal elevable con y sin reserva.* 48



*Vitrina expositora modular CO-CVEG / CO-CVEPC 10* 50



*Vitrina expositora modular serie 12 cristal elevable, con y sin reserva* 54

## Decoración franja superior/ Top strip decor

## Lacado / Lacquered



Lacado estándar / Standard lacquered  
 Lacado Alto-brillo / Hight glossy lacquered  
 Metalizado / Metal finish  
 Fosforescente / fluorescent



## PVC madera / PVC wood



NOGAL / WALNUT



WENGUÉ / WENGUE



HAYA / BEECH



## Plastificado / Plasticized



AMARILLO / YELLOW

RAL - 1023



VERDE / GREEN

RAL - 6001



GRIS / GREY

RAL - 7040



BURDEOS/BORDEAUX

RAL - 3003



NARANJA / ORANGE

RAL - 2008



CREMA / CREAM

RAL - 1015



NEGRO / BLACK

RAL - 9005



AZUL / BLUE

RAL - 5003




ROJO / RED

RAL - 3020




BLANCO / WHITE

RAL - 9003

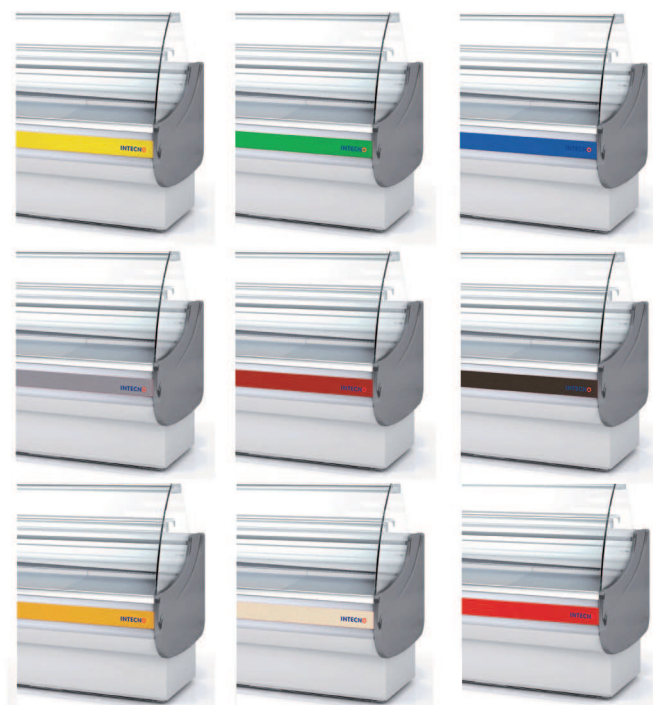

## Inox / Stainless steel






## Decoración frontal / frontal decor



## Decoración total / Total decor

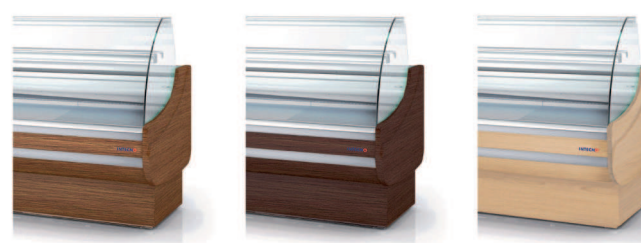

### DECORACION FRANJA SUPERIOR:

- Estándar, incluido en precio venta público, excepto acabado lacado.
- Costados en ABS inyectado color gris oscuro
- Frente y base inferior en chapa plastificada color gris RAL-7040
- Franja superior decorativa, disponible en acabados:
  - Plastificado (10 colores)
  - PVC madera (3 colores)
  - Acero inox
  - Lacado colores RAL o NCS (ver incremento de precio)

### DECORACION FRONTAL:

- Incremento de precio sobre PVP
- Costados en ABS inyectado color gris oscuro
- Frente, base inferior y franja decorativa, disponibles en acabados:
  - Plastificado (10 colores)
  - PVC madera (3 colores)
  - Acero inox
  - Lacado colores RAL o NCS

### DECORACION TOTAL:

- Incremento de precio sobre PVP
- Acabado lacado, colores RAL o NCS
- PVC madera (3 colores), costados lacados en el mismo color

### TOP STRIP DECOR:

- Estándar, ncluded in price, except lacquered finish.
- Injected ABS, dark gray colour
- Plasticized front and lower base, gray RAL-7040
- Top decorative strip, available in finishes:
  - Plasticized (10 colors)
  - PVC wood (3 colors)
  - Stainless Steel
  - Lacquered RAL or NCS (see price increase)


### FRONT DECOR:

- Increased price
- Injected ABS, dark gray colour
- Front, lower base and Top decorative strip, available in finishes:
  - Plasticized (10 colors)
  - PVC wood (3 colors)
  - Stainless Steel
  - Painted RAL or NCS (see price increase)


### TOTAL DECOR:

- Increased price on PVP
- Lacquered finish, RAL or NCS
- PVC wood (3 colors), sides lacquered in the same color

|               |  |
|---------------|--|
| CO-CVE-8-10-R |  |
| CO-CVE-8-13-R |  |
| CO-CVE-8-15-R |  |
| CO-CVE-8-20-R |  |
| CO-CVE-8-25-R |  |
| CO-CVE-8-30-R |  |

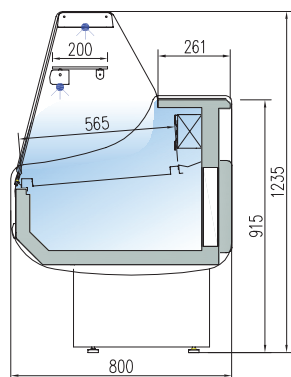

|               |  |
|---------------|--|
| CO-CVE-8-10-C |  |
| CO-CVE-8-13-C |  |
| CO-CVE-8-15-C |  |
| CO-CVE-8-20-C |  |
| CO-CVE-8-25-C |  |
| CO-CVE-8-30-C |  |

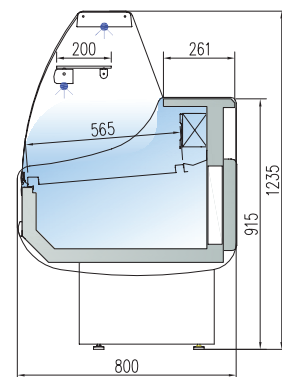

|             | largo<br>length<br>(mm) | exposición<br>display<br>(m²) | reserva<br>cold storage<br>(m³) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(A) | consumo<br>consumption<br>(KW/24h) | refrigerante<br>coolant |
|-------------|-------------------------|-------------------------------|---------------------------------|---------------------------|--------------------------------------|-------------------------------|------------------------------------|-------------------------|
| CO-CVE-8-10 | 1055                    | 0,5                           | 0,28                            | 1                         | 330                                  | 4.32                          | 10.9                               | R-404A                  |
| CO-CVE-8-13 | 1305                    | 0,66                          | 0,37                            | 2                         | 410                                  | 4.58                          | 11.6                               | R-404A                  |
| CO-CVE-8-15 | 1525                    | 0,77                          | 0,43                            | 2                         | 550                                  | 5.94                          | 15.0                               | R-404A                  |
| CO-CVE-8-20 | 2025                    | 1,05                          | 0,57                            | 3                         | 675                                  | 7.04                          | 17.8                               | R-404A                  |
| CO-CVE-8-25 | 2525                    | 1,32                          | 0,72                            | 4                         | 880                                  | 7.06                          | 17.8                               | R-404A                  |
| CO-CVE-8-30 | 2995                    | 1,6                           | 1,12                            | 4                         | 1050                                 | 7.55                          | 19.1                               | R-404A                  |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

- Exterior e interior en chapa de acero plastificada
  - Plano exposición y encimera en acero inox AISI-304
  - Bandejas plano de exposición lisas, con escalón al mismo precio
  - Costados de 40 mm en ABS inyectado excepto acabado madera
  - Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
  - Paragolpes en la parte delantera
  - Cristal frontal templado, abatible
  - Estante de cristal intermedio, no refrigerado
  - Iluminación estándar: encimera superior y estante
  - Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
  - Reserva refrigerada con puertas, hueco 440x270
  - Evaporador estático
  - Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
  - Control electrónico de temperatura
  - Indicador de temperatura
  - Descarche automático
  - Clase climática 3 ( 25°C 60%Hr) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
  - Display area and counter in stainless steel AISI-304
  - Smooth deck for display area, stepped at same price
  - 40 mm sides in injected ABS, except wood decor, two version available
  - Anodised aluminium profiles
  - Standard decoration: short dark gray sides gray front+ blue decorative stripe
  - Front rubber bumper
  - Tempered and hinged frost glass
  - Glass shelf non refrigerated
  - Standard lighting: top worktop and shelf
  - 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
  - Refrigerated under storage with doors 440x270
  - Static evaporator
  - Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
  - Electronic temperature controller
  - External thermometer
  - Auto defrost
  - Climate class 3 (25°C 60%Hr) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

### Opciones - Options

| ref.        | madera o lacado sólo<br>fontal<br>lacquered or wood only<br>front | madera o lacado<br>incluidos costados<br>lacquered or wood<br>including sides | lacado<br>alto brillo<br>Hight glossy<br>lacquered | cierre plexi<br>plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | neutra<br>neutral | remoto<br>remote |
|-------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------|----------------------------------------------------|-----------------------------|-----------------------------|-------------------------|-------------------|------------------|
| CO-CVE-8-10 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |
| CO-CVE-8-13 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |
| CO-CVE-8-15 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |
| CO-CVE-8-20 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |
| CO-CVE-8-25 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |
| CO-CVE-8-30 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |


Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

230v 60Hz / 115v 60Hz consultar - consult





*Vitrina expositora modular serie 8 con reserva*  
*Serve over counter modular line 8 with cold storage*



opción costado compacto  
 long sides option



CO-CVE-8-20-C  
 decoración estándar  
 standard front side finish



CO-CVE-8-20-C  
 frontal inox  
 stainless steel decor



lacado  
 lacquered




madera  
 wood




interior 440x270

Módulos en ángulo refrigerados y neutros  
Refrigerated and neutral modular angle

ÁNGULOS REFRIGERADOS / REFRIGERATED ANGLE



CO-CVE-8-AP90-R



CO-CVE-8-AN90-R

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
  - Plano exposición y encimera en acero inox AISI-304
  - Bandejas plano de exposición lisas, con escalón al mismo precio
  - Costados de 40 mm en ABS inyectado excepto acabado madera
  - Perfilera en aluminio anodizado
  - Paragolpes en la parte delantera
  - Cristal frontal templado, abatible
  - Estante de cristal intermedio, no refrigerado
  - Iluminación estándar: encimera superior
  - Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
  - Evaporador ventilado
  - Condensación ventilada
  - Control electrónico de temperatura
  - Indicador de temperatura
  - Descarche automático
  - Evaporación automática de serie
  - Clase climática 3 (25°C 60%HR) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
  - Display area and counter in stainless steel AISI-304
  - Smooth deck for display area, stepped at same price
  - 40 mm sides in injected ABS, except wood decor, two version available
  - Anodised aluminium profiles
  - Front rubber bumper
  - Tempered and hinged frost glass
  - Glass shelf non refrigerated
  - Standard lighting: top worktop
  - 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
  - Ventilated evaporator
  - Ventilated condensation
  - Electronic temperature controller
  - External thermometer
  - Auto defrost
  - Standard automatic evaporation
  - Climate class 3 (25°C 60%HR) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006


Opciones - Options

|                                                                                |                                                                          |                                                                                          |                                                                                   |                             |                         |                                   |                   |                  |
|--------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|
| sólo frontal, inox lacado<br>ó madera<br>only front,<br>Inox,lacquered or wood | sólo frontal lacado alto<br>brillo<br>only front High gloss<br>lacquered | costados + frontal, inox<br>lacado ó madera<br>sides + front ,<br>Inox,lacquered or wood | costados + frontal<br>lacado alto brillo<br>sides + front High<br>gloss lacquered | luz extra<br>extra lighting | LED blanco<br>white LED | cierre plexi<br>plexi slide doors | neutro<br>neutral | remoto<br>remote |
|--------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|

230v 60Hz / 115v 60Hz

consultar - consult

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

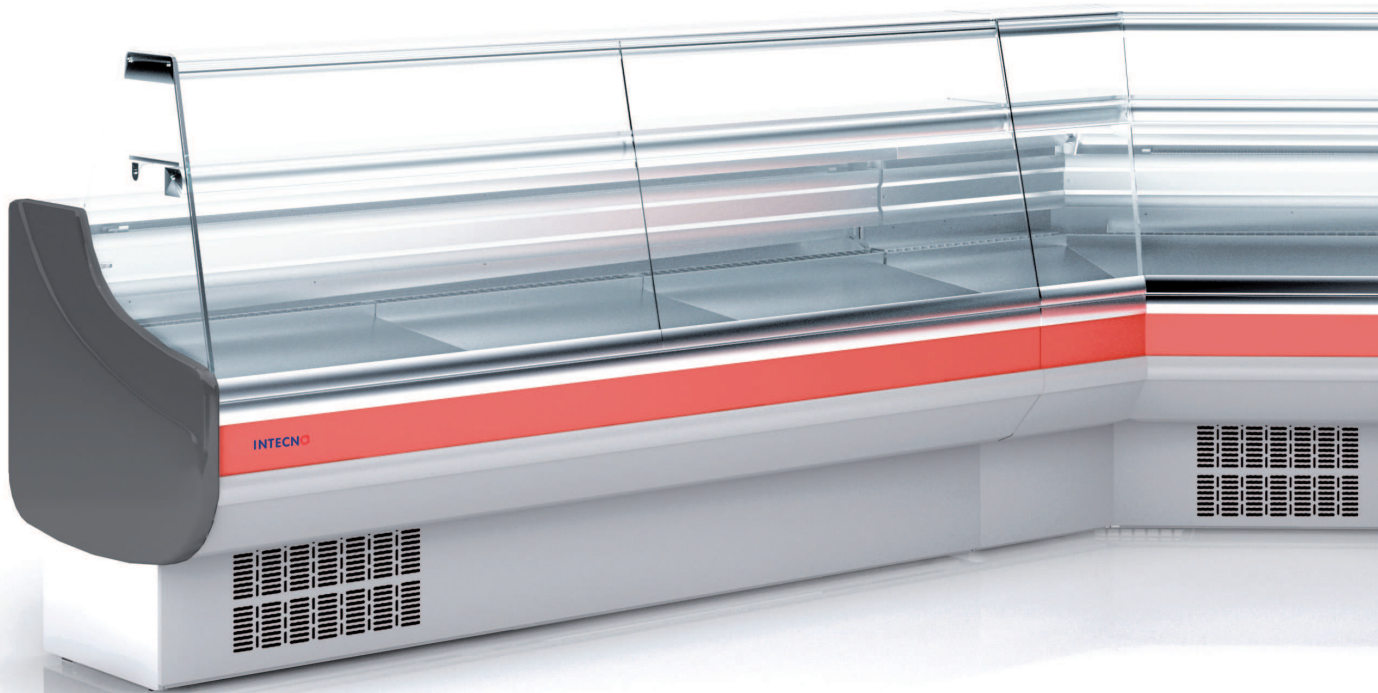

# Vitrina expositora modular serie-8, con reserva

## Serve over counters modular line-8, with cold sotrage

### MUEBLES NEUTROS CAJA\* / CASH NEUTRAL COUNTER\*


\*TODOS INCORPORAN CAJÓN, ESTANTES Y ENCHUFE/  
SUPPLIED WITH DRAWER, SHELVES AND PLUG




Detalle mueble caja (trasero)  
Cash counter (rear view)



Detalle mueble caja (frente)  
Cash counter (front view)




| CO-CMCVE-8-8            |  |
|-------------------------|--|
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

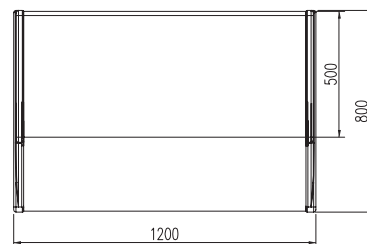


| CO-CMCVE-8-12           |  |
|-------------------------|--|
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

### MUEBLE CAJA NEUTROS EN ÁNGULO / ANGULAR NEUTRAL CASH COUNTER

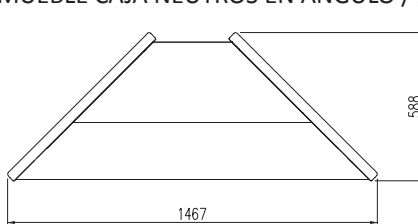


CO-CMCVE-8-AP90

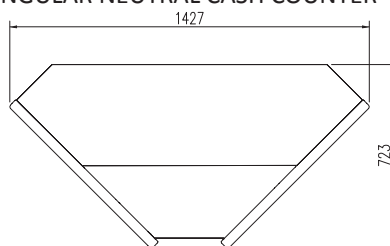


CO-CMCVE-8-AN90


### ÁNGULOS NEUTROS / NEUTRAL ANGLE



opción costado compacto  
long sides option




CO-CVE-8N-AP45-R




CO-CVE-8N-AN45-R









|               |  |
|---------------|--|
| CO-CVE-9-10-R |  |
| CO-CVE-9-13-R |  |
| CO-CVE-9-15-R |  |
| CO-CVE-9-20-R |  |
| CO-CVE-9-25-R |  |
| CO-CVE-9-30-R |  |



|                |  |
|----------------|--|
| CO-CVE-9-10-RR |  |
| CO-CVE-9-13-RR |  |
| CO-CVE-9-15-RR |  |
| CO-CVE-9-20-RR |  |
| CO-CVE-9-25-RR |  |
| CO-CVE-9-30-RR |  |



|               |  |
|---------------|--|
| CO-CVE-9-10-C |  |
| CO-CVE-9-13-C |  |
| CO-CVE-9-15-C |  |
| CO-CVE-9-20-C |  |
| CO-CVE-9-25-C |  |
| CO-CVE-9-30-C |  |



|                |  |
|----------------|--|
| CO-CVE-9-10-CC |  |
| CO-CVE-9-13-CC |  |
| CO-CVE-9-15-CC |  |
| CO-CVE-9-20-CC |  |
| CO-CVE-9-25-CC |  |
| CO-CVE-9-30-CC |  |

|             | largo<br>length<br>(mm) | exposición<br>display<br>(m²) | CVE reserva<br>cold storage<br>(m³) | CVE puertas<br>doors<br>(uds) | CVES reserva<br>cold storage<br>(m³) | CVES puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(A) | consumo<br>consumption<br>(KW/24h) | refrigerante<br>coolant |
|-------------|-------------------------|-------------------------------|-------------------------------------|-------------------------------|--------------------------------------|--------------------------------|--------------------------------------|-------------------------------|------------------------------------|-------------------------|
| CO-CVE-9-10 | 1055                    | 0,61                          | 0,33                                | 1                             | 0                                    | 0                              | 410                                  | 4.32                          | 10.9                               | R-404A                  |
| CO-CVE-9-13 | 1305                    | 0,80                          | 0,43                                | 2                             | 0                                    | 0                              | 550                                  | 5.92                          | 14.9                               | R-404A                  |
| CO-CVE-9-15 | 1525                    | 0,93                          | 0,49                                | 2                             | 0                                    | 0                              | 675                                  | 6.49                          | 16.4                               | R-404A                  |
| CO-CVE-9-20 | 2025                    | 1,24                          | 0,67                                | 3                             | 0                                    | 0                              | 880                                  | 7.04                          | 17.8                               | R-404A                  |
| CO-CVE-9-25 | 2525                    | 1,56                          | 0,84                                | 4                             | 0                                    | 0                              | 1050                                 | 7.06                          | 17.8                               | R-404A                  |
| CO-CVE-9-30 | 2995                    | 1,97                          | 1,19                                | 4                             | 0                                    | 0                              | 1480                                 | 8.71                          | 22.1                               | R-404A                  |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación estándar: encimera superior y estante
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Evaporador estático, opcional ventilado
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Clase climática 3 (25°C 60%HR) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- 40 mm sides in injected ABS, except wood decor, two version available
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Tempered and hinged frost glass
- Glass shelf non refrigerated
- Standard lighting: top worktop and shelf
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Static evaporator, ventilated as optional
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost
- Climate class 3 (25°C 60%HR) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006


### Opciones - Options

| ref.        | madera o lacado sólo<br>fontal<br>lacquered or wood only<br>front | madera o lacado<br>incluidos costados<br>lacquered or wood<br>including sides | lacado<br>alto brillo<br>High glossy<br>lacquered | ventilada<br>ventilated | cierre plexi<br>plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | neutra<br>neutral | remoto<br>remote |
|-------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------|-------------------------|-----------------------------|-----------------------------|-------------------------|-------------------|------------------|
| CO-CVE-9-10 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |
| CO-CVE-9-13 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |
| CO-CVE-9-15 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |
| CO-CVE-9-20 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |
| CO-CVE-9-25 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |
| CO-CVE-9-30 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |


Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

230v 60Hz / 115v 60Hz consultar - consult


### versión SIN RESERVA - without cold storage area




|                |  |
|----------------|--|
| CO-CVES-9-10-R |  |
| CO-CVES-9-13-R |  |
| CO-CVES-9-15-R |  |
| CO-CVES-9-20-R |  |
| CO-CVES-9-25-R |  |
| CO-CVES-9-30-R |  |



|                 |  |
|-----------------|--|
| CO-CVES-9-10-RR |  |
| CO-CVES-9-13-RR |  |
| CO-CVES-9-15-RR |  |
| CO-CVES-9-20-RR |  |
| CO-CVES-9-25-RR |  |
| CO-CVES-9-30-RR |  |




|                |  |
|----------------|--|
| CO-CVES-9-10-C |  |
| CO-CVES-9-13-C |  |
| CO-CVES-9-15-C |  |
| CO-CVES-9-20-C |  |
| CO-CVES-9-25-C |  |
| CO-CVES-9-30-C |  |



|                 |  |
|-----------------|--|
| CO-CVES-9-10-CC |  |
| CO-CVES-9-13-CC |  |
| CO-CVES-9-15-CC |  |
| CO-CVES-9-20-CC |  |
| CO-CVES-9-25-CC |  |
| CO-CVES-9-30-CC |  |


*Vitrina expositora modular serie 9 con y sin reserva*  
*Serve over counter modular line 9 with and without cold storage area*




opción costado compacto  
 long sides option



CO-CVE-9-20-CC  
 decoración madera  
 wood decor

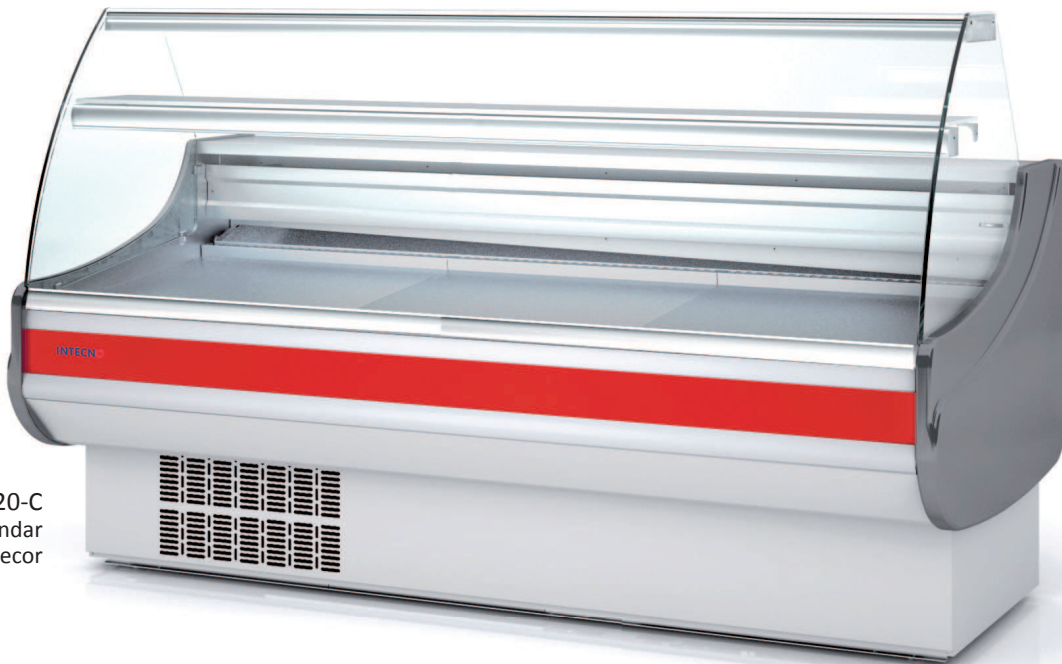


CVE-9-20-C  
 decoración estándar  
 standard decor

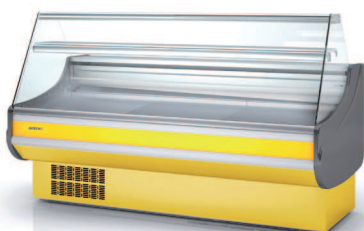

decoración frontal  
 front decor

CO-CVE-9-20-R

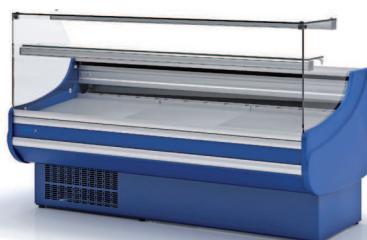

lacado  
 lacquered

CO-CVE-9-20-RR





CO-CVE

CO-CVES



## Módulos en ángulo refrigerados y neutros Refrigerated and neutral modular angle

### ÁNGULOS REFRIGERADOS / REFRIGERATED ANGLE



|                  |  |
|------------------|--|
| CO-CVE-9-AP90-R  |  |
| CO-CVE-9-AP90-RR |  |
| CO-CVE-9-AP90-C  |  |
| CO-CVES-9-AP90-R |  |
| CO-CVE-9-AP90-RR |  |
| CO-CVES-9-AP90-C |  |

|                  |  |
|------------------|--|
| CO-CVE-9-AN90-R  |  |
| CO-CVE-9-AN90-RR |  |
| CO-CVE-9-AN90-C  |  |
| CO-CVES-9-AN90-R |  |
| CO-CVE-9-AN90-RR |  |
| CO-CVES-9-AN90-C |  |



|                   |  |
|-------------------|--|
| CO-CVE-9-RP90-C   |  |
| CO-CVE-9-RP90-RR  |  |
| CO-CVES-9-RP90-C  |  |
| CO-CVES-9-RP90-RR |  |

|                   |  |
|-------------------|--|
| CO-CVE-9-RN90-C   |  |
| CO-CVE-9-RN90-RR  |  |
| CO-CVES-9-RN90-C  |  |
| CO-CVES-9-RN90-RR |  |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
  - Plano exposición y encimera en acero inox AISI-304
  - Bandejas plano de exposición lisas, con escalón al mismo precio
  - Costados de 40 mm en ABS inyectado excepto acabado madera
  - Perfilera en aluminio anodizado
  - Paragolpes en la parte delantera
  - Cristal frontal templado, abatible
  - Estante de cristal intermedio, no refrigerado
  - Iluminación estándar: encimera superior y estante
  - Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
  - Evaporador ventilado
  - Condensación ventilada
  - Control electrónico de temperatura
  - Indicador de temperatura
  - Descarche automático
  - Evaporación automática de serie
  - Clase climática 3 (25°C 60%HR) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
  - Display area and counter in stainless steel AISI-304
  - Smooth deck for display area, stepped at same price
  - 40 mm sides in injected ABS, except wood decor, two version available
  - Anodised aluminium profiles
  - Front rubber bumper
  - Tempered and hinged frost glass
  - Glass shelf non refrigerated
  - Standard lighting: top worktop and shelf
  - 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
  - Ventilated evaporator
  - Ventilated condensation
  - Electronic temperature controller
  - External thermometer
  - Auto defrost
  - Standard automatic evaporation
  - Climate class 3 (25°C 60%HR) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006


### Opciones - Options

|                                                                                 |                                                                          |                                                                                          |                                                                                   |                             |                         |                                   |                   |                  |
|---------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|
| sólo frontal, inox lacado<br>ó madera<br>only front, Inox, lacquered<br>or wood | sólo frontal lacado alto<br>brillo<br>only front High gloss<br>lacquered | costados + frontal, inox<br>lacado ó madera<br>sides + front,<br>Inox, lacquered or wood | costados + frontal<br>lacado alto brillo<br>sides + front High<br>gloss lacquered | luz extra<br>extra lighting | LED blanco<br>white LED | cierre plexi<br>plexi slide doors | neutro<br>neutral | remoto<br>remote |
|---------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|

230v 60Hz / 115v 60Hz

consultar - consult

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

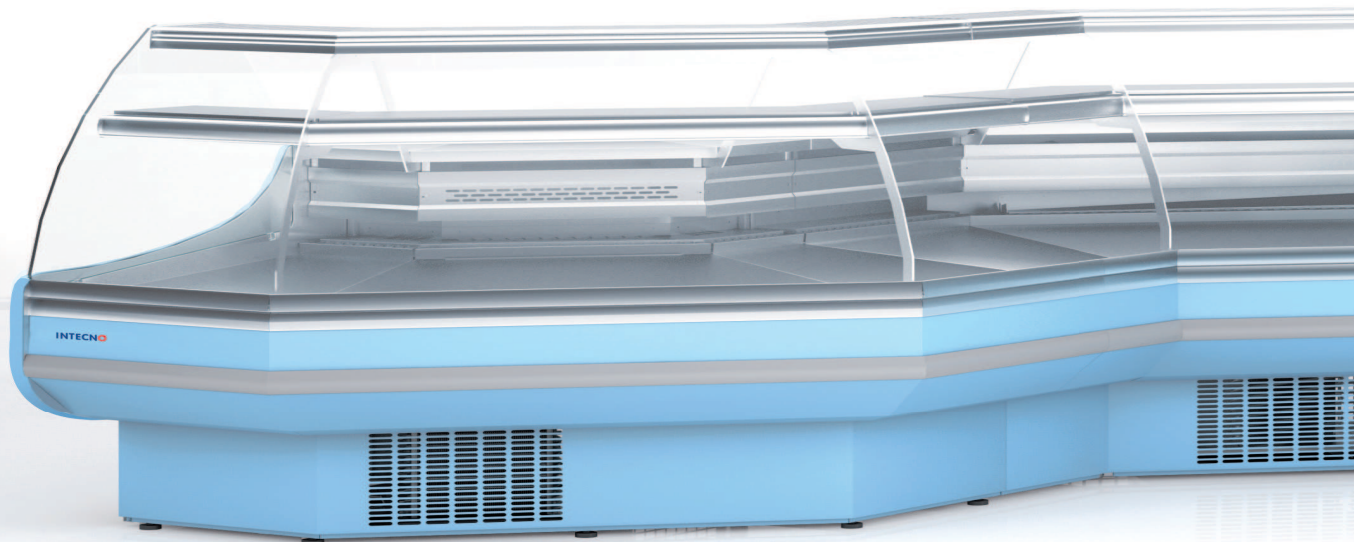



# Vitrina expositora modular serie-9, con y sin reserva

## Serve over counters modular line-9, with and without cold storage

### MUEBLES NEUTROS CAJA\* / CASH NEUTRAL COUNTER\*


\*TODOS INCORPORAN CAJÓN, ESTANTES Y ENCHUFE/  
SUPPLIED WITH DRAWER, SHELVES AND PLUG




Detalle mueble caja (trasero)  
Cash counter (rear view)




Detalle mueble caja (frente)  
Cash counter (front view)



opción costado compacto  
long sides option




|                         |  |
|-------------------------|--|
| CO-CMCVE-9-8            |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

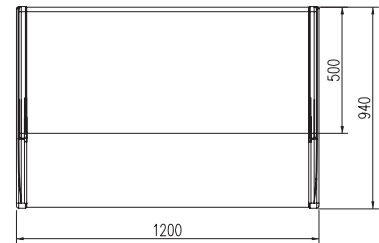


|                         |  |
|-------------------------|--|
| CO-CMCVE-9-12           |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

### MUEBLE CAJA NEUTROS EN ÁNGULO / ANGULAR NEUTRAL CASH COUNTER

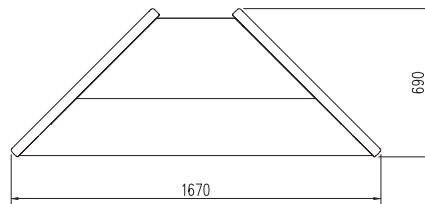


CO-CMCVE-9-AP90

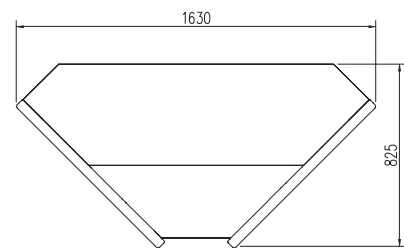


CO-CMCVE-9-AN90


### ÁNGULOS NEUTROS / NEUTRAL ANGLE




|                    |  |
|--------------------|--|
| CO-CVE-9N-AP45-R   |  |
| CO-CVE-9N-AP45-RR  |  |
| CO-CVE-9N-AP45-CC  |  |
| CO-CVES-9N-AP45-R  |  |
| CO-CVES-9N-AP45-RR |  |
| CO-CVES-9N-AP45-C  |  |




|                    |  |
|--------------------|--|
| CO-CVE-9N-AN45-R   |  |
| CO-CVE-9N-AN45-RR  |  |
| CO-CVE-9N-AN45-C   |  |
| CO-CVES-9N-AN45-R  |  |
| CO-CVES-9N-AN45-RR |  |
| CO-CVES-9N-AN45-C  |  |

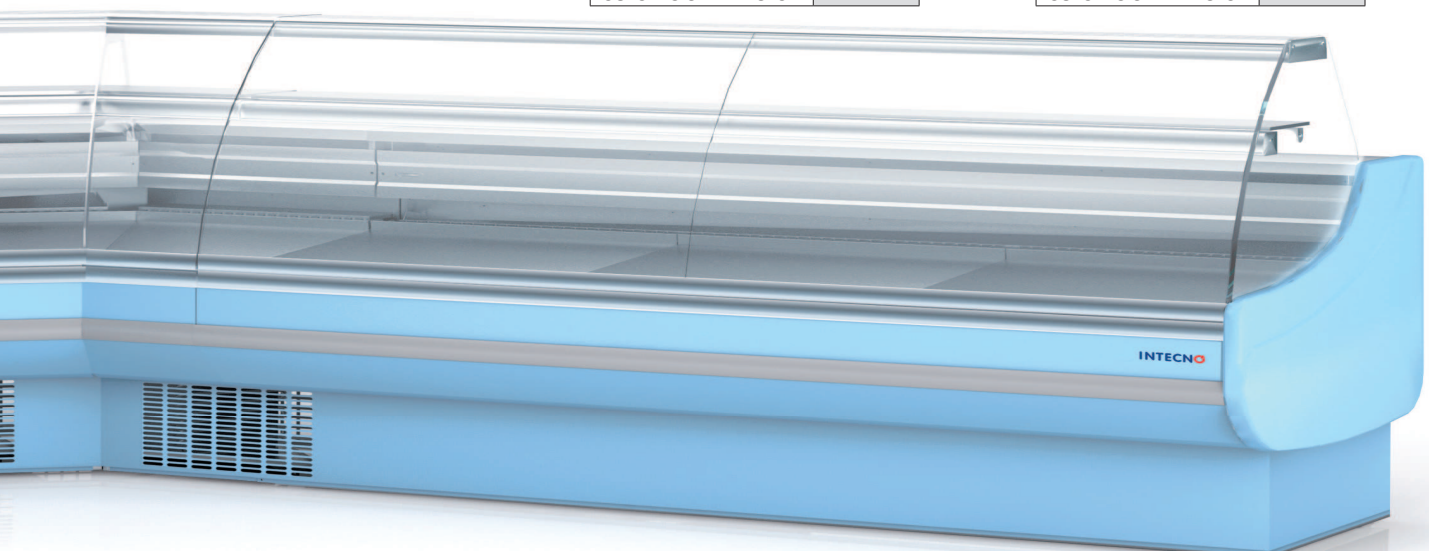


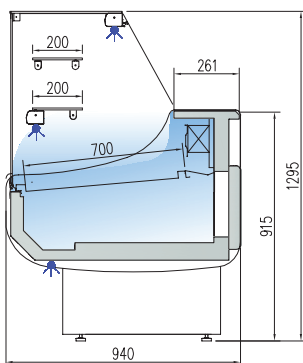

|                 |  |
|-----------------|--|
| CO-CVEP-9-10-RR |  |
| CO-CVEP-9-13-RR |  |
| CO-CVEP-9-15-RR |  |
| CO-CVEP-9-20-RR |  |
| CO-CVEP-9-25-RR |  |
| CO-CVEP-9-30-RR |  |

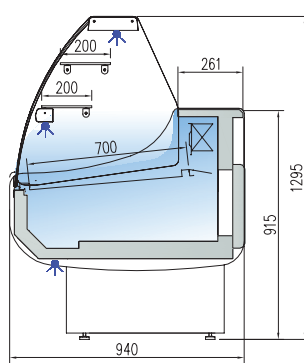

|                |  |
|----------------|--|
| CO-CVEP-9-10-C |  |
| CO-CVEP-9-13-C |  |
| CO-CVEP-9-15-C |  |
| CO-CVEP-9-20-C |  |
| CO-CVEP-9-25-C |  |
| CO-CVEP-9-30-C |  |

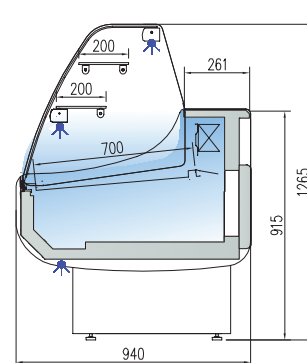

|                 |  |
|-----------------|--|
| CO-CVEP-9-10-CC |  |
| CO-CVEP-9-13-CC |  |
| CO-CVEP-9-15-CC |  |
| CO-CVEP-9-20-CC |  |
| CO-CVEP-9-25-CC |  |
| CO-CVEP-9-30-CC |  |

| ref.         | largo<br>length<br>(mm) | cámara<br>storage<br>(m³) | exposición<br>display<br>(m²) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(A) | consumo<br>consumption<br>(KW/24h) | refrigerante<br>coolant |
|--------------|-------------------------|---------------------------|-------------------------------|---------------------------|--------------------------------------|-------------------------------|------------------------------------|-------------------------|
| CO-CVEP-9-10 | 1055                    | 0,33                      | 0,61                          | 1                         | 410                                  | 4.32                          | 10.9                               | R-404A                  |
| CO-CVEP-9-13 | 1305                    | 0,43                      | 0,80                          | 2                         | 550                                  | 5.92                          | 14.9                               | R-404A                  |
| CO-CVEP-9-15 | 1525                    | 0,49                      | 0,93                          | 2                         | 675                                  | 6.49                          | 16.4                               | R-404A                  |
| CO-CVEP-9-20 | 2025                    | 0,67                      | 1,24                          | 3                         | 880                                  | 7.04                          | 17.8                               | R-404A                  |
| CO-CVEP-9-25 | 2525                    | 0,84                      | 1,56                          | 4                         | 1050                                 | 7.06                          | 17.8                               | R-404A                  |
| CO-CVEP-9-30 | 2995                    | 1,19                      | 1,97                          | 4                         | 1480                                 | 8.71                          | 22.1                               | R-404A                  |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Diseño especial para pastelería, con dos estantes en el plano de exposición y tres puntos de iluminación estándar
- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilería en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estantes de cristal intermedios, no refrigerados
- Iluminación estándar: encimera superior, estante inferior y base frontal
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270 (excepto modelo neutro)
- Evaporador estático, opcional ventilado
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático- Clase climática 3 ( 25°C 60%Hr) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Design focused for bakery, with two shelves at the exposure and three standard lighting
- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- 40 mm sides in injected ABS, except wood decor, two version available
- Standard decoration: short dark gray sides gray front+ blue decorative stripe. Anodised aluminium profiles
- Front rubber bumper
- Tempered and hinged frost glass
- Glass shelves non refrigerated
- Standard lighting: top worktop, shelf and front base
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors 440x270 (except for ambient models)
- Static evaporator, ventilated as optional
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Climate class 3 (25°C 60%Hr) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

### Opciones - Options

| ref.         | madera o lacado sólo<br>fontal<br>lacquered or wood only<br>front | madera o lacado<br>incluidos costados<br>lacquered or wood<br>including sides | lacado<br>alto brillo<br>High glossy<br>lacquered | ventilada<br>ventilated | cierre plexi<br>plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | neutra<br>neutral | remoto<br>remote |
|--------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------|-------------------------|-----------------------------|-----------------------------|-------------------------|-------------------|------------------|
| CO-CVEP-9-10 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |
| CO-CVEP-9-13 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |
| CO-CVEP-9-15 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |
| CO-CVEP-9-20 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |
| CO-CVEP-9-25 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |
| CO-CVEP-9-30 |                                                                   |                                                                               |                                                   |                         |                             |                             |                         |                   |                  |

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included


230v 60Hz / 115v 60Hz consultar - consult

guías 40x60 por puerta 40x60 runners per door 90 €

guías 40x60 opcionales (sólo con evaporador estático)  
optional 40x60 runners (only with static evaporator)



*Vitrina expositora modular serie 9 PASTELERÍA con reserva*  
*Serve over counter modular line 9 PASTRY with cold storage*



opción costado compacto  
 long sides option



CO-CVEP-9-20-C  
 lacado  
 lacquered




CO-CVEP-9-20-CC  
 madera  
 wood



decoración frontal  
 front decor



versión RR

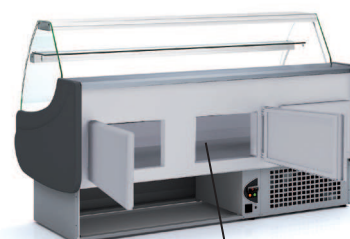

interior 440x270



## Módulos en ángulo refrigerados y neutros Refrigerated and neutral modular angle

### ÁNGULOS REFRIGERADOS / REFRIGERATED ANGLE

|                   |                   |                   |                   |
|-------------------|-------------------|-------------------|-------------------|
|                   |                   |                   |                   |
| CO-CVEP-9-AP90-C  | CO-CVEP-9-AN90-C  | CO-CVEP-9-RP90-C  | CO-CVEP-9-RN90-C  |
| CO-CVEP-9-AP90-RR | CO-CVEP-9-AN90-RR | CO-CVEP-9-RP90-RR | CO-CVEP-9-RN90-RR |

características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Perfilería en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación estándar: encimera superior y estante
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
- Evaporador ventilado
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Evaporación automática de serie
- Clase climática 3 ( 25°C 60% Hr) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

we reserve the right to change specifications whitout prior notice

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- 40 mm sides in injected ABS, except wood decor, two version available
- Anodised aluminium profiles
- Front rubber bumper
- Tempered and hinged frost glass
- Glass shelf non refrigerated
- Standard lighting: top worktop and shelf
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
- Ventilated evaporator
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Auto defrost
- Standard automatic evaporation
- Climate class 3 (25°C 60% Hr) regime M1


M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

### Opciones - Options

|                                                                           |                                                                    |                                                                                    |                                                                             |                             |                         |                                   |                   |                  |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|
| sólo frontal, inox lacado ó madera<br>only front, Inox, lacquered or wood | sólo frontal lacado alto brillo<br>only front High gloss lacquered | costados + frontal, inox lacado ó madera<br>sides + front, Inox, lacquered or wood | costados + frontal lacado alto brillo<br>sides + front High gloss lacquered | luz extra<br>extra lighting | LED blanco<br>white LED | cierre plexi<br>plexi slide doors | neutro<br>neutral | remoto<br>remote |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|

230v 60Hz / 115v 60Hz consultar - consult

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

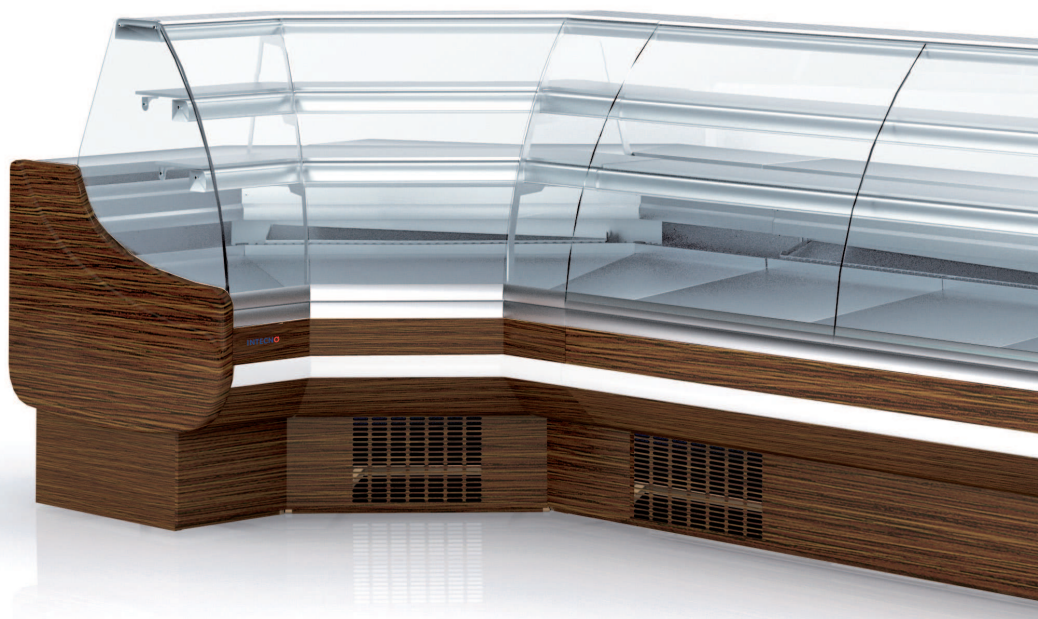

# Vitrina expositora modular serie-9 PASTELERA, con reserva

## Serve over counters modular line-9 PASTRY, with and without cold storage

### MUEBLES NEUTROS CAJA\* / CASH NEUTRAL COUNTER\*


\*TODOS INCORPORAN CAJÓN, ESTANTES Y ENCHUFE/  
SUPPLIED WITH DRAWER, SHELVES AND PLUG




Detalle mueble caja (trasero)  
Cash counter (rear view)



Detalle mueble caja (frente)  
Cash counter (front view)




|                         |  |
|-------------------------|--|
| CO-CMCVE-9-8            |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

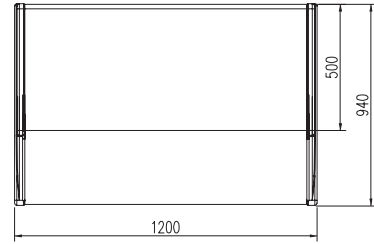


|                         |  |
|-------------------------|--|
| CO-CMCVE-9-12           |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

### MUEBLE CAJA NEUTROS EN ÁNGULO / ANGULAR NEUTRAL CASH COUNTER

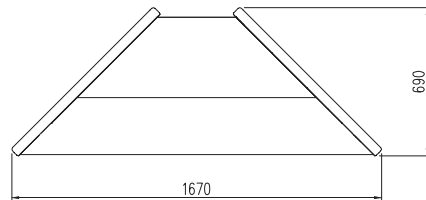


|                  |  |
|------------------|--|
| CO-CMCVEP-9-AP90 |  |
|------------------|--|

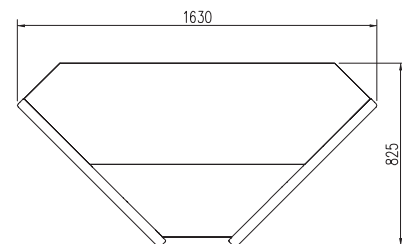


|                 |  |
|-----------------|--|
| CO-CMCVE-9-AN90 |  |
|-----------------|--|


### ÁNGULOS NEUTROS / NEUTRAL ANGLE



opción costado compacto  
long sides option




|                    |  |
|--------------------|--|
| CO-CVEP-9N-AP45-C  |  |
| CO-CVEP-9N-AP45-RR |  |




|                   |  |
|-------------------|--|
| CO-CVE-9N-AN45-C  |  |
| CO-CVE-9N-AN45-RR |  |




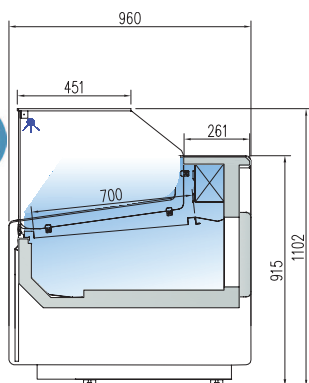

|                 |  |
|-----------------|--|
| CO-CVE-9-10-RCB |  |
| CO-CVE-9-13-RCB |  |
| CO-CVE-9-15-RCB |  |
| CO-CVE-9-20-RCB |  |
| CO-CVE-9-25-RCB |  |
| CO-CVE-9-30-RCB |  |

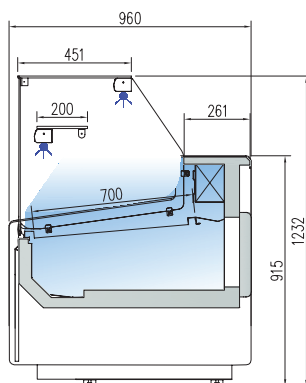

|                |  |
|----------------|--|
| CO-CVE-9-10-RC |  |
| CO-CVE-9-13-RC |  |
| CO-CVE-9-15-RC |  |
| CO-CVE-9-20-RC |  |
| CO-CVE-9-25-RC |  |
| CO-CVE-9-30-RC |  |

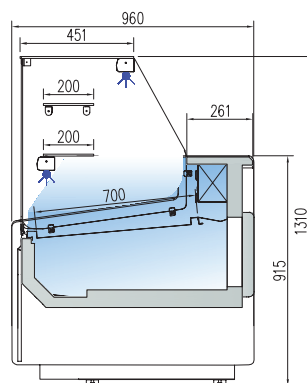

|                 |  |
|-----------------|--|
| CO-CVEP-9-10-RC |  |
| CO-CVEP-9-13-RC |  |
| CO-CVEP-9-15-RC |  |
| CO-CVEP-9-20-RC |  |
| CO-CVEP-9-25-RC |  |
| CO-CVEP-9-30-RC |  |

| ref.        | largo<br>length<br>(mm) | cámara<br>storage<br>(m³) | exposición<br>display<br>(m²) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(A) | consumo<br>consumption<br>(KW/24h) | refrigerante<br>coolant |
|-------------|-------------------------|---------------------------|-------------------------------|---------------------------|--------------------------------------|-------------------------------|------------------------------------|-------------------------|
| CO-CVE-9-10 | 1055                    | 0,33                      | 0,61                          | 1                         | 410                                  | 4.32                          | 10.9                               | R-404A                  |
| CO-CVE-9-13 | 1305                    | 0,43                      | 0,80                          | 2                         | 550                                  | 5.92                          | 14.9                               | R-404A                  |
| CO-CVE-9-15 | 1525                    | 0,49                      | 0,93                          | 2                         | 675                                  | 6.49                          | 16.4                               | R-404A                  |
| CO-CVE-9-20 | 2025                    | 0,67                      | 1,24                          | 3                         | 880                                  | 7.04                          | 17.8                               | R-404A                  |
| CO-CVE-9-25 | 2525                    | 0,84                      | 1,56                          | 4                         | 1050                                 | 7.06                          | 17.8                               | R-404A                  |
| CO-CVE-9-30 | 2995                    | 1,19                      | 1,97                          | 4                         | 1480                                 | 8.71                          | 22.1                               | R-404A                  |

características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Costados de 40 mm en ABS inyectado
- Decoración estándar: costados gris claro frontal inferior gris claro + franja superior inox. Perfilería en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado
- Estante de cristal intermedio, no refrigerado
- Iluminación estándar: encimera superior y estante
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270
- Evaporador estático, opcional ventilado
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático, opcional por resistencia eléctrica
- Clase climática 3 (25°C 60%HR) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

we reserve the right to change specifications whitout prior notice

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- Sides in ABS injected, 40 mm thick
- Standard decoration: bottom frontal and sides in light grey, top frontal in stainless steel
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass
- Glass shelf non refrigerated
- Standard lighting: top worktop and shelf
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors 440x270
- Static evaporator, ventilated as optional
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Climate class 3 (25°C 60%HR) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

### Opciones - Options

| ref.        | madera o lacado sólo<br>frontal<br>lacquered or wood only<br>front | madera o lacado<br>incluidos costados<br>lacquered or wood<br>including sides | lacado<br>alto brillo<br>Hight glossy<br>lacquered | ventilada<br>ventilated | cierre plexi<br>plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | neutra<br>neutral | remoto<br>remote |
|-------------|--------------------------------------------------------------------|-------------------------------------------------------------------------------|----------------------------------------------------|-------------------------|-----------------------------|-----------------------------|-------------------------|-------------------|------------------|
| CO-CVE-9-10 |                                                                    |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |
| CO-CVE-9-13 |                                                                    |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |
| CO-CVE-9-15 |                                                                    |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |
| CO-CVE-9-20 |                                                                    |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |
| CO-CVE-9-25 |                                                                    |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |
| CO-CVE-9-30 |                                                                    |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

230v 60Hz / 115v 60Hz consultar - consult


guías 40x60 por puerta 40x60 runners per door 90 €

guías 40x60 opcionales (sólo con evaporador estático)  
optional 40x60 runners (only with static evaporator)





*Vitrina expositora modular serie 9 DELICATESSEN con reserva*  
*Serve over counter modular line 9 DELICATESSEN with cold storage*

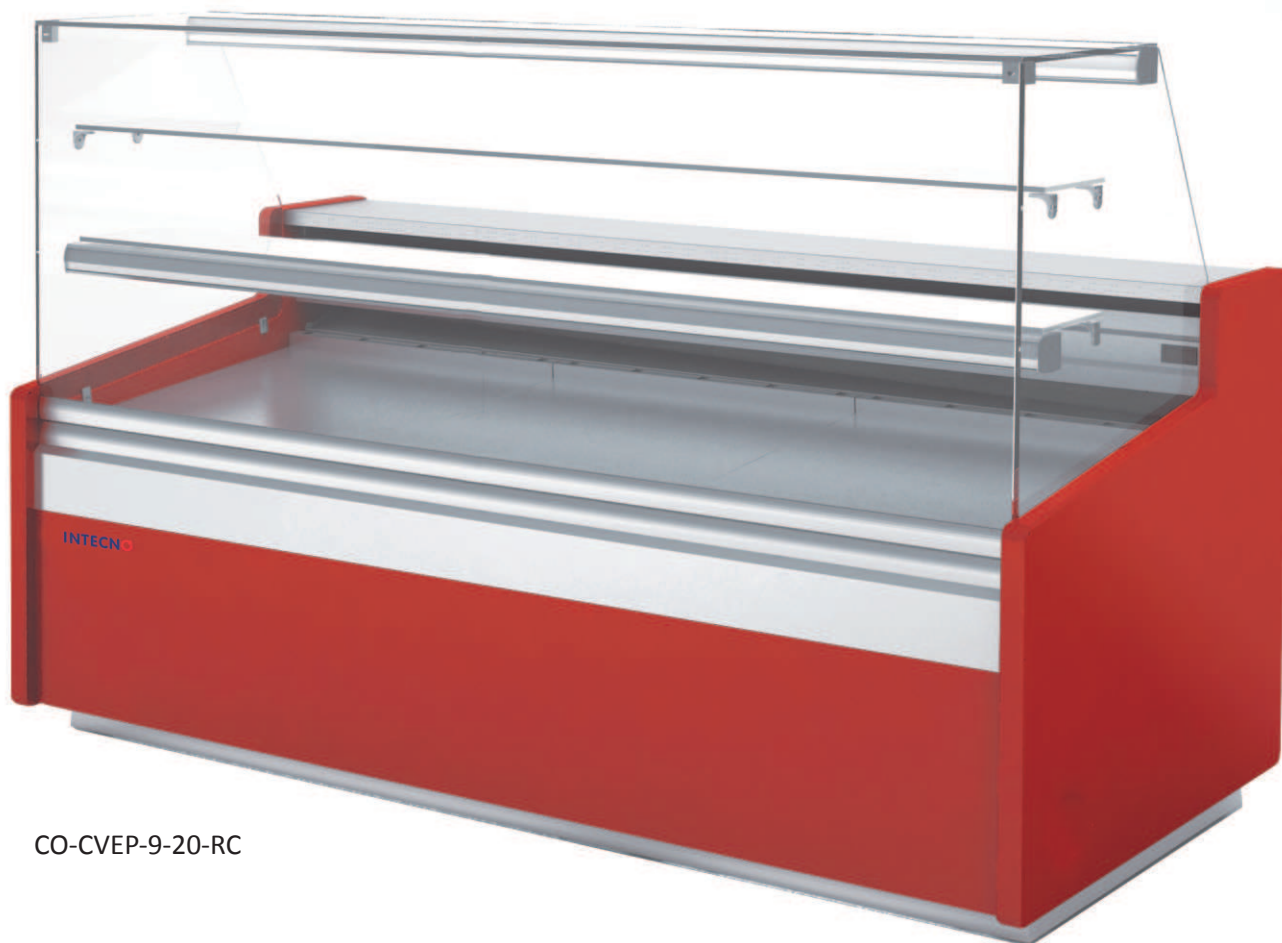

CO-CVEP-9-20-RC





CO-CVE-9-20-RC  
decoración estándar  
standard decor



CO-CVE-9-20-RCB


## Módulos en ángulo refrigerados y neutros Refrigerated and neutral modular angle

### ÁNGULOS REFRIGERADOS / REFRIGERATED ANGLE




|                    |  |
|--------------------|--|
| CO-CVE-9-AP90-RC   |  |
| CO-CVE-9-AP-90-RCB |  |
| CO-CVEP-9-AP90-RC  |  |

|                   |  |
|-------------------|--|
| CO-CVE-9-AN90-RC  |  |
| CO-CVE-9-AN90-RCB |  |
| CO-CVEP-9-AN90-RC |  |



|                   |  |
|-------------------|--|
| CO-CVE-9-RP90-RC  |  |
| CO-CVE-9-RP90-RCB |  |
| CO-CVEP-9-RP90-RC |  |



|                   |  |
|-------------------|--|
| CO-CVE-9-RN90-RC  |  |
| CO-CVE-9-RN90-RCB |  |
| CO-CVEP-9-RN90-RC |  |

características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior e interior en chapa de acero plastificada
  - Plano exposición y encimera en acero inox AISI-304
  - Bandejas plano de exposición lisas, con escalón al mismo precio
  - Costados de 40 mm en ABS inyectado excepto acabado madera
  - Perfilera en aluminio anodizado
  - Paragolpes en la parte delantera
  - Cristal frontal templado, abatible
  - Estantes de cristal intermedios, no refrigerados
  - Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
  - Evaporador ventilado
  - Condensación ventilada
  - Control electrónico de temperatura
  - Indicador de temperatura
  - Descarga automática, opcional por resistencia eléctrica
  - Evaporación automática de serie
  - Clase climática 3 (25°C 60%HR) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

we reserve the right to change specifications without prior notice

- Interior and exterior finish in plastic coated steel
  - Display area and counter in stainless steel AISI-304
  - Smooth deck for display area, stepped at same price
  - 40 mm sides in injected ABS, except wood decor, two version available
  - Anodised aluminium profiles
  - Front rubber bumper
  - Tempered and hinged frost glass
  - Glass shelves non refrigerated
  - 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
  - Ventilated evaporator
  - Ventilated condensation
  - Electronic temperature controller
  - External thermometer
  - Auto defrost, by heated cable as optional
  - Standard automatic evaporation
  - Climate class 3 (25°C 60%HR) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006


### Opciones - Options

|                                                                           |                                                                    |                                                                                    |                                                                             |                             |                         |                                   |                   |                  |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|
| sólo frontal, inox lacado ó madera<br>only front, Inox, lacquered or wood | sólo frontal lacado alto brillo<br>only front High gloss lacquered | costados + frontal, inox lacado ó madera<br>sides + front, Inox, lacquered or wood | costados + frontal lacado alto brillo<br>sides + front High gloss lacquered | luz extra<br>extra lighting | LED blanco<br>white LED | cierre plexi<br>plexi slide doors | neutro<br>neutral | remoto<br>remote |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|

230v 60Hz / 115v 60Hz

consultar - consult

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

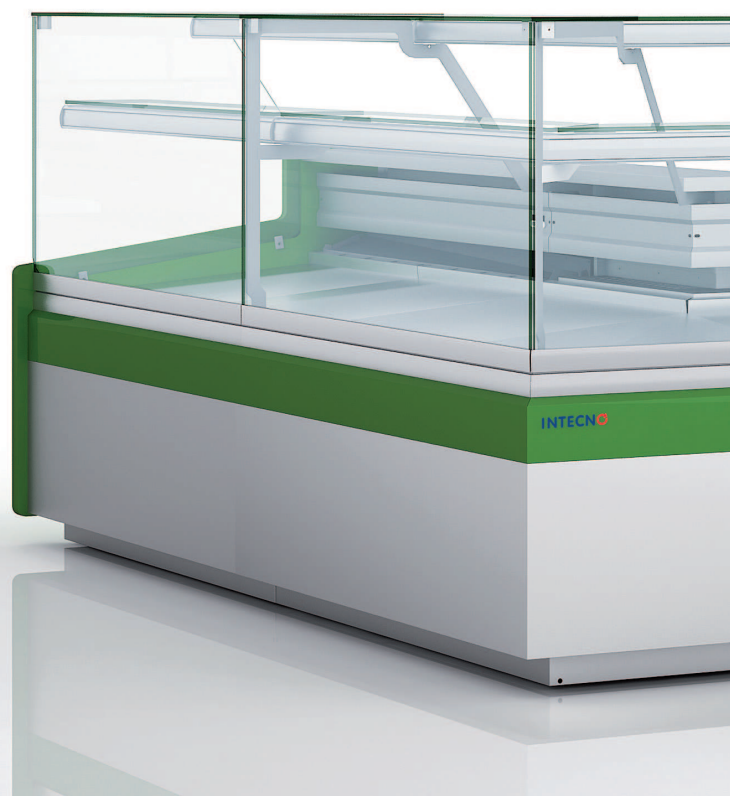


*Vitrina expositora modular serie-9 DELICATESSEN, con reserva*  
*Serve over counters modular line-9 DELICATESSEN, with cold storage*

MUEBLES NEUTROS CAJA\* / CASH NEUTRAL COUNTER\*


\*TODOS INCORPORAN CAJÓN, ESTANTES Y ENCHUFE/  
 SUPPLIED WITH DRAWER, SHELVES AND PLUG




Detalle mueble caja (trasero)  
 Cash counter (rear view)



Detalle mueble caja (frente)  
 Cash counter (front view)




|                         |  |
|-------------------------|--|
| CO-CMCVE-9-8-RC         |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

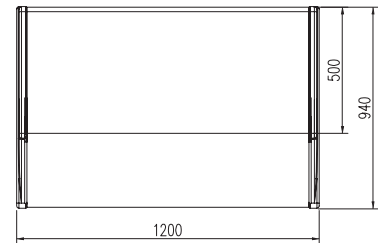


|                         |  |
|-------------------------|--|
| CO-CMCVE-9-12-RC        |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

MUEBLE CAJA NEUTROS EN ÁNGULO /  
 ANGULAR NEUTRAL CASH COUNTER

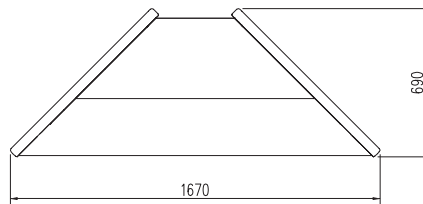


|                    |  |
|--------------------|--|
| CO-CMCVE-9-RP90-RC |  |
|--------------------|--|

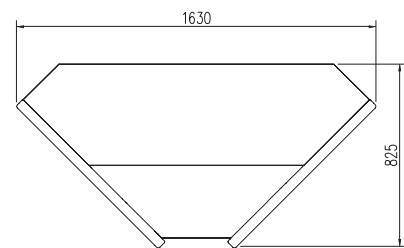



|                    |  |
|--------------------|--|
| CO-CMCVE-9-RN90-RC |  |
|--------------------|--|

ÁNGULOS NEUTROS / NEUTRAL ANGLE

|                    |  |
|--------------------|--|
| CO-CVE-9N-AP45-RCB |  |
| CO-CVE-9N-AP45-RC  |  |
| CO-CVEP-9N-AP45-RC |  |




|                    |  |
|--------------------|--|
| CO-CVE-9N-AN45-RCB |  |
| CO-CVE-9N-AN45-RC  |  |
| CO-CVEP-9N-AN45-RC |  |

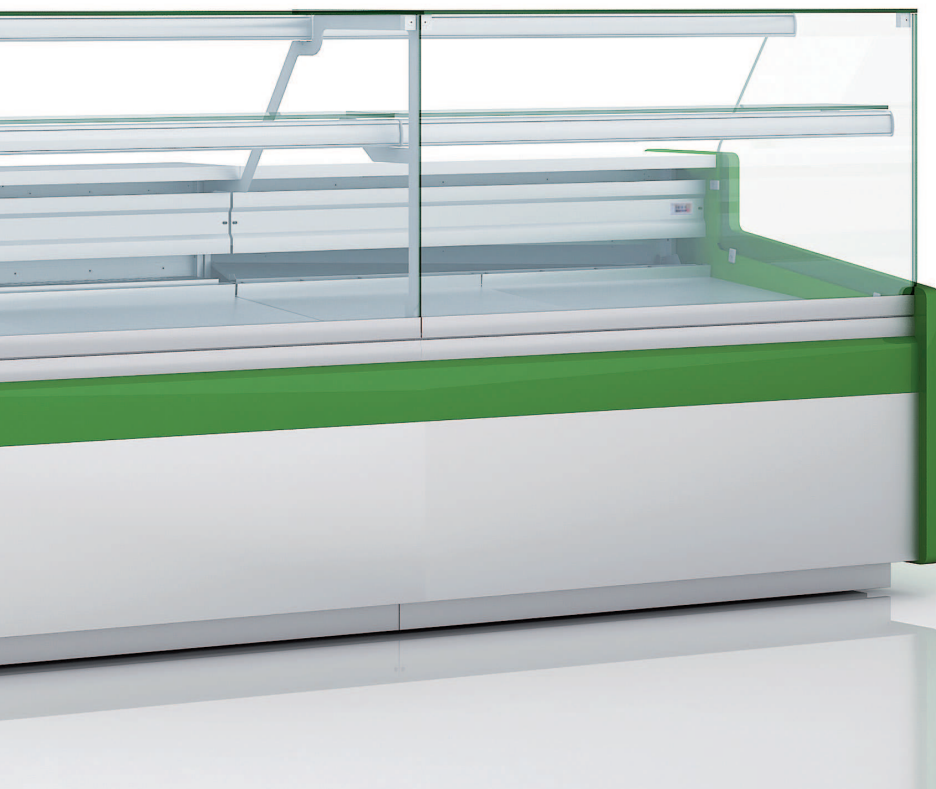




|                 |  |
|-----------------|--|
| CO-CVEF-9-10-RR |  |
| CO-CVEF-9-13-RR |  |
| CO-CVEF-9-15-RR |  |
| CO-CVEF-9-20-RR |  |
| CO-CVEF-9-25-RR |  |
| CO-CVEF-9-30-RR |  |

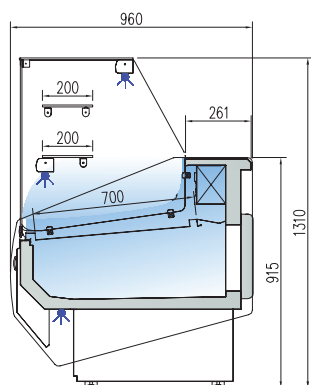

|                |  |
|----------------|--|
| CO-CVEF-9-10-C |  |
| CO-CVEF-9-13-C |  |
| CO-CVEF-9-15-C |  |
| CO-CVEF-9-20-C |  |
| CO-CVEF-9-25-C |  |
| CO-CVEF-9-30-C |  |

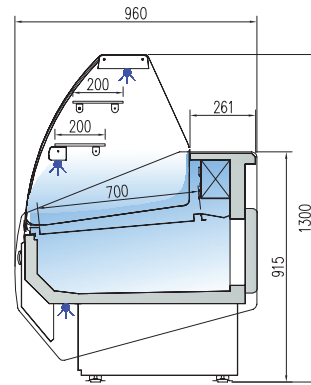

| ref.         | largo<br>length<br>(mm) | cámara<br>storage<br>(m³) | exposición<br>display<br>(m²) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(A) | consumo<br>consumption<br>(KW/24h) | refrigerante<br>coolant |
|--------------|-------------------------|---------------------------|-------------------------------|---------------------------|--------------------------------------|-------------------------------|------------------------------------|-------------------------|
| CO-CVEF-9-10 | 1055                    | 0,33                      | 0,61                          | 1                         | 410                                  | 4.32                          | 10.9                               | R-404A                  |
| CO-CVEF-9-13 | 1305                    | 0,43                      | 0,80                          | 2                         | 550                                  | 5.92                          | 14.9                               | R-404A                  |
| CO-CVEF-9-15 | 1525                    | 0,49                      | 0,93                          | 2                         | 675                                  | 6.49                          | 16.4                               | R-404A                  |
| CO-CVEF-9-20 | 2025                    | 0,67                      | 1,24                          | 3                         | 880                                  | 7.04                          | 17.8                               | R-404A                  |
| CO-CVEF-9-25 | 2525                    | 0,84                      | 1,56                          | 4                         | 1050                                 | 7.06                          | 17.8                               | R-404A                  |
| CO-CVEF-9-30 | 2995                    | 1,19                      | 1,97                          | 4                         | 1480                                 | 8.71                          | 22.1                               | R-404A                  |

características técnicas y constructivas sujetas a variación sin previo aviso

- Diseño especial para pastelería, con dos estantes
- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Costados de 40 mm en ABS inyectado
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación estándar: encimera superior, estante y base frontal
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270
- Evaporador estático, opcional ventilado
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático, opcional por resistencia eléctrica
- Clase climática 3 (25°C 60%HR) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

we reserve the right to change specifications whitout prior notice

- Design focused for bakery, with two shelves
- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- Sides in ABS injected, 40 mm thick
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass hinges forward
- Glass shelf non refrigerated
- Standard lighting: top worktop, shelf and frontal base
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors 440x270
- Static evaporator, ventilated as optional
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Climate class 3 (25°C 60%HR) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

### Opciones - Options

| ref.         | madera o lacado sólo<br>fontal<br>lacquered or wood only<br>front | madera o lacado<br>incluidos costados<br>lacquered or wood<br>including sides | lacado<br>alto brillo<br>Hight glossy<br>lacquered | ventilada<br>ventilated | cierre plexi<br>plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | neutra<br>neutral | remoto<br>remote |
|--------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------|----------------------------------------------------|-------------------------|-----------------------------|-----------------------------|-------------------------|-------------------|------------------|
| CO-CVEF-9-10 |                                                                   |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |
| CO-CVEF-9-13 |                                                                   |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |
| CO-CVEF-9-15 |                                                                   |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |
| CO-CVEF-9-20 |                                                                   |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |
| CO-CVEF-9-25 |                                                                   |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |
| CO-CVEF-9-30 |                                                                   |                                                                               |                                                    |                         |                             |                             |                         |                   |                  |

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included


230v 60Hz / 115v 60Hz consultar - consult

guías 40x60 por puerta 40x60 runners per door

guías 40x60 opcionales (sólo con evaporador estático)  
optional 40x60 runners (only with static evaporator)



*Vitrina expositora modular serie 9 FLAVOUR con reserva*  
*Serve over counter modular line 9 FLAVOUR with cold storage*



DE SERIE  
STANDAR




CO-CVEF-9-20-C


VITRINAS  
EXPOSITOAS

## Módulos en ángulo refrigerados y neutros Refrigerated and neutral modular angle


### ÁNGULOS REFRIGERADOS / REFRIGERATED ANGLE




|                    |  |
|--------------------|--|
| CO-CVEF-9-AP90-C   |  |
| CO-CVEF-9-AP-90-RR |  |



|                   |  |
|-------------------|--|
| CO-CVEF-9-AN90-C  |  |
| CO-CVEF-9-AN90-RR |  |



|                   |  |
|-------------------|--|
| CO-CVEF-9-RP90-C  |  |
| CO-CVEF-9-RP90-RR |  |



|                   |  |
|-------------------|--|
| CO-CVEF-9-RN90-C  |  |
| CO-CVEF-9-RN90-RR |  |

características técnicas y constructivas sujetas a variación sin previo aviso

- Diseño especial para pastelería, con dos estantes
  - Exterior e interior en chapa de acero plastificada
  - Plano exposición y encimera en acero inox AISI-304
  - Bandejas plano de exposición lisas, con escalón al mismo precio
  - Costados de 40 mm en ABS inyectado excepto acabado madera
  - Perfilería en aluminio anodizado
  - Paragolpes en la parte delantera
  - Cristal frontal templado, abatible
  - Estantes de cristal intermedios, no refrigerados
  - Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
  - Evaporador ventilado
  - Condensación ventilada
  - Control electrónico de temperatura
  - Indicador de temperatura
  - Descarche automático, opcional por resistencia eléctrica
  - Evaporación automática de serie
  - Clase climática 3 ( 25°C 60%*Hr*) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

we reserve the right to change specifications without prior notice

- Design focused for bakery, with two shelves
  - Interior and exterior finish in plastic coated steel
  - Display area and counter in stainless steel AISI-304
  - Smooth deck for display area, stepped at same price
  - 40 mm sides in injected ABS, except wood decor, two version available
  - Anodised aluminium profiles
  - Front rubber bumper
  - Tempered and hinged frost glass
  - Glass shelves non refrigerated
  - 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
  - Ventilated evaporator
  - Ventilated condensation
  - Electronic temperature controller
  - External thermometer
  - Auto defrost, by heated cable as optional
  - Standard automatic evaporation
  - Climate class 3 (25°C 60%*Hr*) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006





# Vitrina expositora modular serie 9 FLAVOUR con reserva

## Serve over counter modular line 9 FLAVOUR with cold storage

### MUEBLES NEUTROS CAJA\* / CASH NEUTRAL COUNTER\*


\*TODOS INCORPORAN CAJÓN, ESTANTES Y ENCHUFE/  
SUPPLIED WITH DRAWER, SHELVES AND PLUG




Detalle mueble caja (trasero)  
Cash counter (rear view)



Detalle mueble caja (frente)  
Cash counter (front view)




|                         |  |
|-------------------------|--|
| CO-CMCVEF-9-8           |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

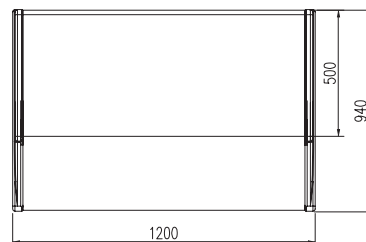


|                         |  |
|-------------------------|--|
| CO-CMCVEF-9-12          |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

### MUEBLE CAJA NEUTROS EN ÁNGULO / ANGULAR NEUTRAL CASH COUNTER

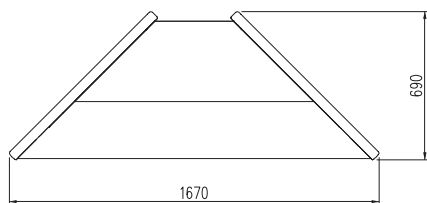

|                  |  |
|------------------|--|
| CO-CMCVEF-9-RP90 |  |
|------------------|--|

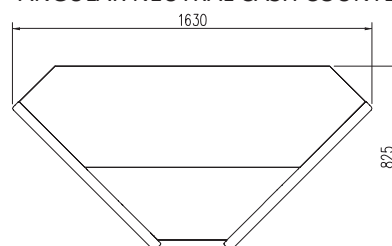

|                  |  |
|------------------|--|
| CO-CMCVEF-9-RN90 |  |
|------------------|--|


### Opciones - Options

|                                                                           |                                                                    |                                                                                    |                                                                             |                             |                         |                                   |                   |                  |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|
| sólo frontal, inox lacado ó madera<br>only front, Inox, lacquered or wood | sólo frontal lacado alto brillo<br>only front High gloss lacquered | costados + frontal, inox lacado ó madera<br>sides + front, Inox, lacquered or wood | costados + frontal lacado alto brillo<br>sides + front High gloss lacquered | luz extra<br>extra lighting | LED blanco<br>white LED | cierre plexi<br>plexi slide doors | neutro<br>neutral | remoto<br>remote |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|


230v 60Hz / 115v 60Hz

consultar - consult


Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

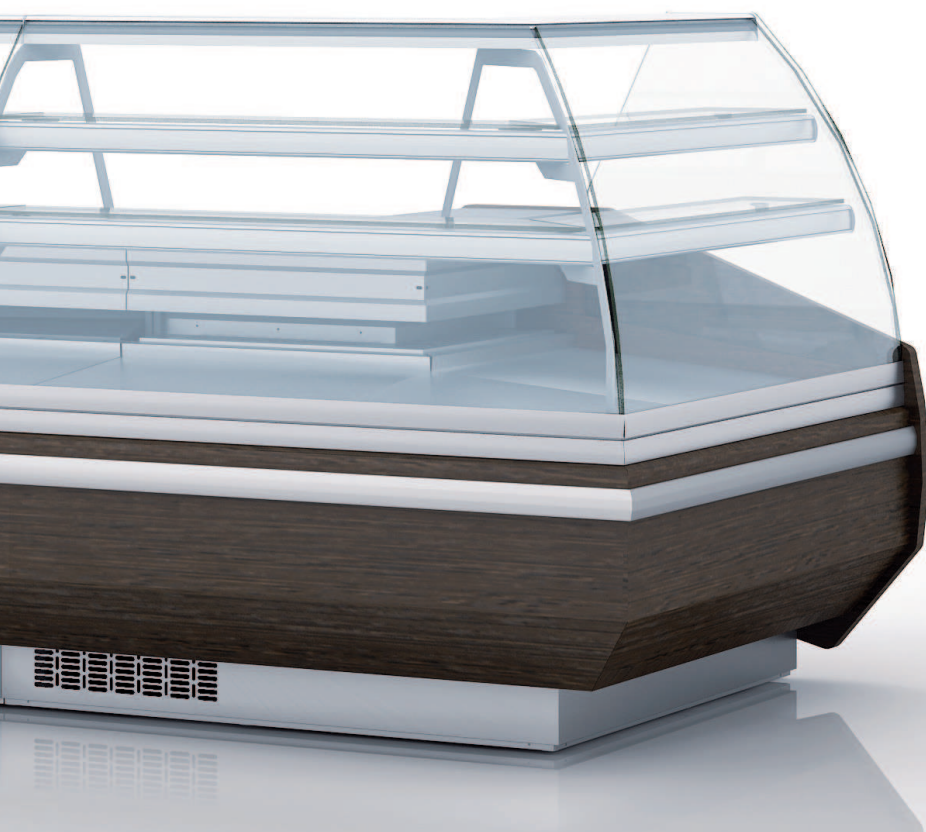

|              |  |
|--------------|--|
| CO-CV-9-10-C |  |
| CO-CV-9-13-C |  |
| CO-CV-9-15-C |  |
| CO-CV-9-20-C |  |
| CO-CV-9-25-C |  |
| CO-CV-9-30-C |  |

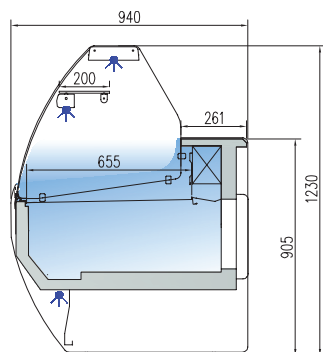

|               |  |
|---------------|--|
| CO-CV-9-10-CC |  |
| CO-CV-9-13-CC |  |
| CO-CV-9-15-CC |  |
| CO-CV-9-20-CC |  |
| CO-CV-9-25-CC |  |
| CO-CV-9-30-CC |  |

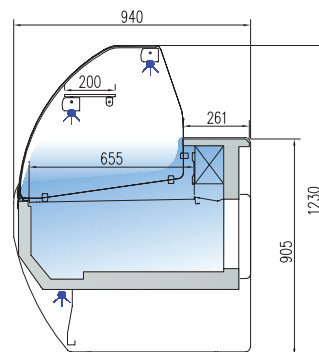

| ref.       | largo length (mm) | exposición display (m²) | CV reserva cold storage (m³) | CV puertas doors (uds) | CVS reserva cold storage (m³) | CVS puertas doors (uds) | potencia frig. frig. power (W) | consumo consumption (A) | consumo consumption (KW/24h) | refrigerante coolant |
|------------|-------------------|-------------------------|------------------------------|------------------------|-------------------------------|-------------------------|--------------------------------|-------------------------|------------------------------|----------------------|
| CO-CV-9-10 | 1055              | 0,61                    | 0,33                         | 1                      | 0                             | 0                       | 410                            | 4.32                    | 10.9                         | R-404A               |
| CO-CV-9-13 | 1305              | 0,80                    | 0,43                         | 2                      | 0                             | 0                       | 550                            | 5.92                    | 14.9                         | R-404A               |
| CO-CV-9-15 | 1525              | 0,93                    | 0,49                         | 2                      | 0                             | 0                       | 675                            | 6.49                    | 16.4                         | R-404A               |
| CO-CV-9-20 | 2025              | 1,24                    | 0,67                         | 3                      | 0                             | 0                       | 880                            | 7.04                    | 17.8                         | R-404A               |
| CO-CV-9-25 | 2525              | 1,56                    | 0,84                         | 4                      | 0                             | 0                       | 1050                           | 7.06                    | 17.8                         | R-404A               |
| CO-CV-9-30 | 2995              | 1,97                    | 1,19                         | 4                      | 0                             | 0                       | 1480                           | 8.71                    | 22.1                         | R-404A               |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación estándar: encimera superior, estante y base frontal
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Evaporador estático, opcional ventilado
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Clase climática 3 (25°C 60%HR) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- 40 mm sides in injected ABS, except wood decor, two version available
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Tempered and hinged frost glass
- Glass shelf non refrigerated
- Standard lighting: top worktop, shelf and frontal base
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Static evaporator, ventilated as optional
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost
- Climate class 3 (25°C 60%HR) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

#### Opciones - Options


| ref.       | madera o lacado sólo frontal<br>lacquered or wood only front | madera o lacado incluidos costados<br>lacquered or wood including sides | lacado alto brillo<br>High glossy lacquered | ventilada<br>ventilated | cierre plexi<br>plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | neutra<br>neutral | remoto<br>remote |
|------------|--------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------|-------------------------|-----------------------------|-----------------------------|-------------------------|-------------------|------------------|
| CO-CV-9-10 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                   |                  |
| CO-CV-9-13 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                   |                  |
| CO-CV-9-15 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                   |                  |
| CO-CV-9-20 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                   |                  |
| CO-CV-9-25 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                   |                  |
| CO-CV-9-30 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                   |                  |

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included


230v 60Hz / 115v 60Hz consultar - consult

#### versión SIN RESERVA - without cold storage area


|               |  |
|---------------|--|
| CO-CVS-9-10-C |  |
| CO-CVS-9-13-C |  |
| CO-CVS-9-15-C |  |
| CO-CVS-9-20-C |  |
| CO-CVS-9-25-C |  |
| CO-CVS-9-30-C |  |

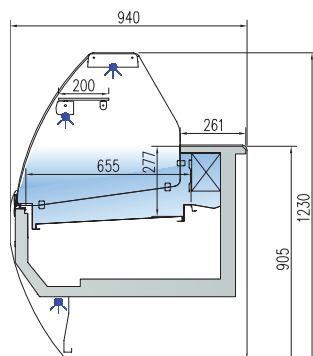


|                |  |
|----------------|--|
| CO-CVS-9-10-CC |  |
| CO-CVS-9-13-CC |  |
| CO-CVS-9-15-CC |  |
| CO-CVS-9-20-CC |  |
| CO-CVS-9-25-CC |  |
| CO-CVS-9-30-CC |  |

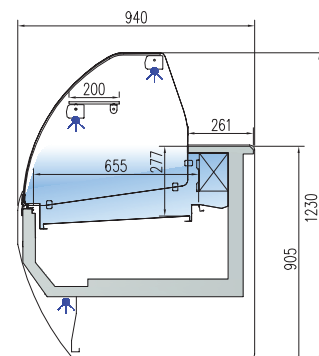

*Vitrina expositora modular serie 9 SELECTA con o sin reserva*  
*Serve over counter modular line 9 SELECTA with or without cold storage*



DE SERIE  
STANDAR

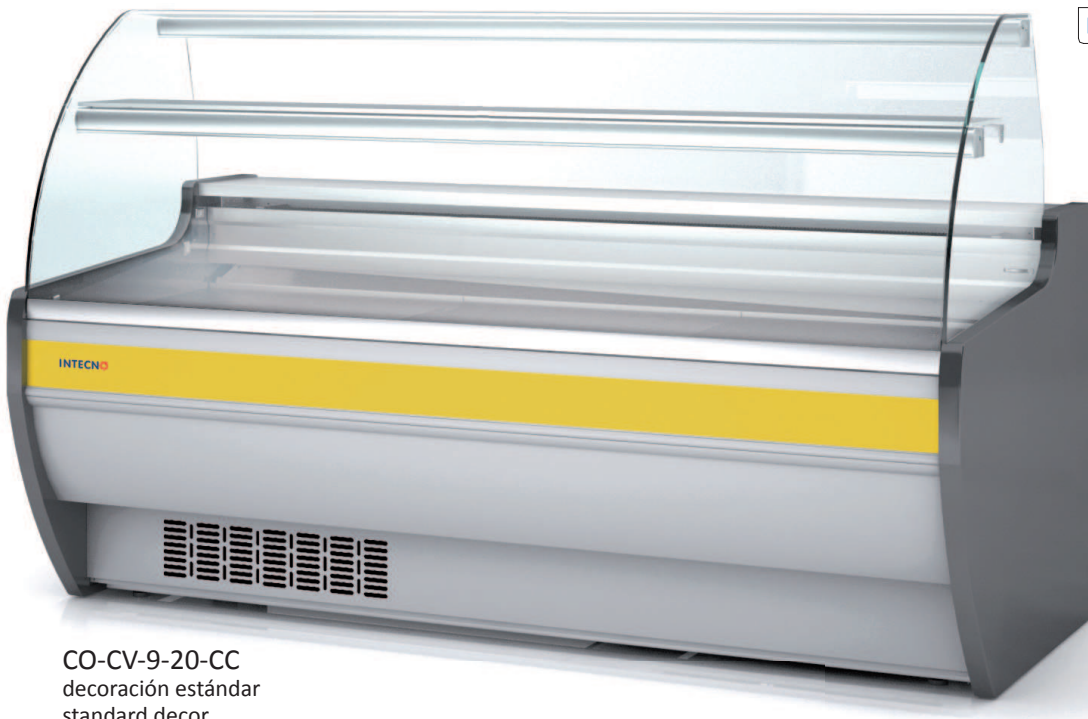

CO-CV-9-20-CC  
decoración estándar  
standard decor




CO-CV-9-20-C  
frontal inox  
stainless steel front decor



lacado  
lacquered



madera  
wood




CO-CV

CO-CVS




## Módulos en ángulo refrigerados y neutros Refrigerated and neutral modular angle


### ÁNGULOS REFRIGERADOS / REFRIGERATED ANGLE




|                 |  |
|-----------------|--|
| CO-CV-9-AP90-C  |  |
| CO-CVS-9-AP90-C |  |



|                 |  |
|-----------------|--|
| CO-CV-9-AN90-C  |  |
| CO-CVS-9-AN90-C |  |



|                 |  |
|-----------------|--|
| CO-CV-9-RP90-C  |  |
| CO-CVS-9-RP90-C |  |



|                 |  |
|-----------------|--|
| CO-CV-9-RN90-C  |  |
| CO-CVS-9-RN90-C |  |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Perfilería en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible, dos versiones disponibles
- Estantes de cristal intermedios, no refrigerados
- Iluminación estándar: encimera superior, estante inferior y base frontal
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
- Estante de apoyo en la zona de servicio
- Evaporador ventilado
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático, opcional por resistencia eléctrica
- Evaporación automática de serie
- Clase climática 3 (25°C 60%HR) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass hinges forward, two versions available
- Glass shelves non refrigerated
- Standard lighting: top worktop, shelf and front base
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
- Auxiliary shelf in the rear side
- Ventilated evaporator
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Standard automatic evaporation
- Climate class 3 (25°C 60%HR) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006


### Opciones - Options

|                                                                           |                                                                    |                                                                                    |                                                                             |                             |                         |                                   |                   |                  |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|
| sólo frontal, inox lacado ó madera<br>only front, Inox, lacquered or wood | sólo frontal lacado alto brillo<br>only front High gloss lacquered | costados + frontal, inox lacado ó madera<br>sides + front, Inox, lacquered or wood | costados + frontal lacado alto brillo<br>sides + front High gloss lacquered | luz extra<br>extra lighting | LED blanco<br>white LED | cierre plexi<br>plexi slide doors | neutro<br>neutral | remoto<br>remote |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|

230v 60Hz / 115v 60Hz

consultar - consult

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

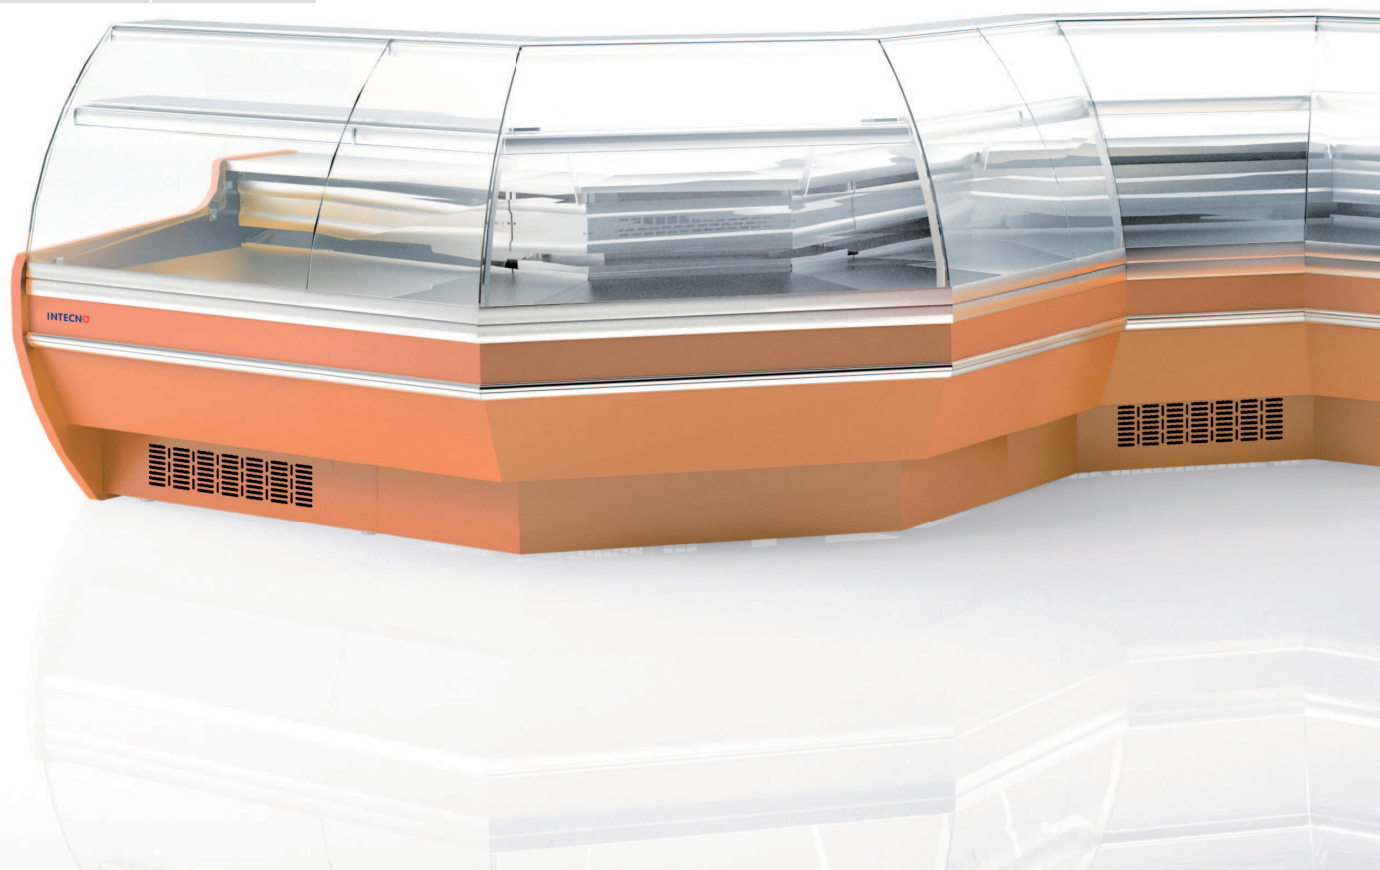

# Vitrina expositora modular serie 9 SELECTA con o sin reserva

## Serve over counter modular line 9 SELECTA with or without cold storage

### MUEBLES NEUTROS CAJA\* / CASH NEUTRAL COUNTER\*


\*TODOS INCORPORAN CAJÓN, ESTANTES Y ENCHUFE/  
SUPPLIED WITH DRAWER, SHELVES AND PLUG




Detalle mueble caja (trasero)  
Cash counter (rear view)



Detalle mueble caja (frente)  
Cash counter (front view)




|                         |  |
|-------------------------|--|
| CO-CMCVP-9-8            |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

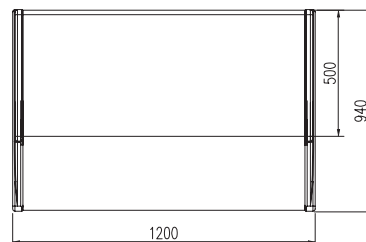


|                         |  |
|-------------------------|--|
| CO-CMCVP-9-12           |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

### MUEBLE CAJA NEUTROS EN ÁNGULO / ANGULAR NEUTRAL CASH COUNTER

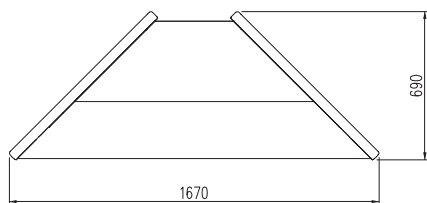


|                 |  |
|-----------------|--|
| CO-CMCVP-9-RP90 |  |
|-----------------|--|

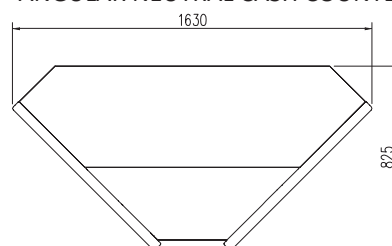



|                 |  |
|-----------------|--|
| CO-CMCVP-9-RN90 |  |
|-----------------|--|


### ÁNGULOS NEUTROS / NEUTRAL ANGLE

|                  |  |
|------------------|--|
| CO-CV-9N-AP45-C  |  |
| CO-CVS-9N-AP45-C |  |




|                  |  |
|------------------|--|
| CO-CV-9N-AN45-C  |  |
| CO-CVS-9N-AN45-C |  |

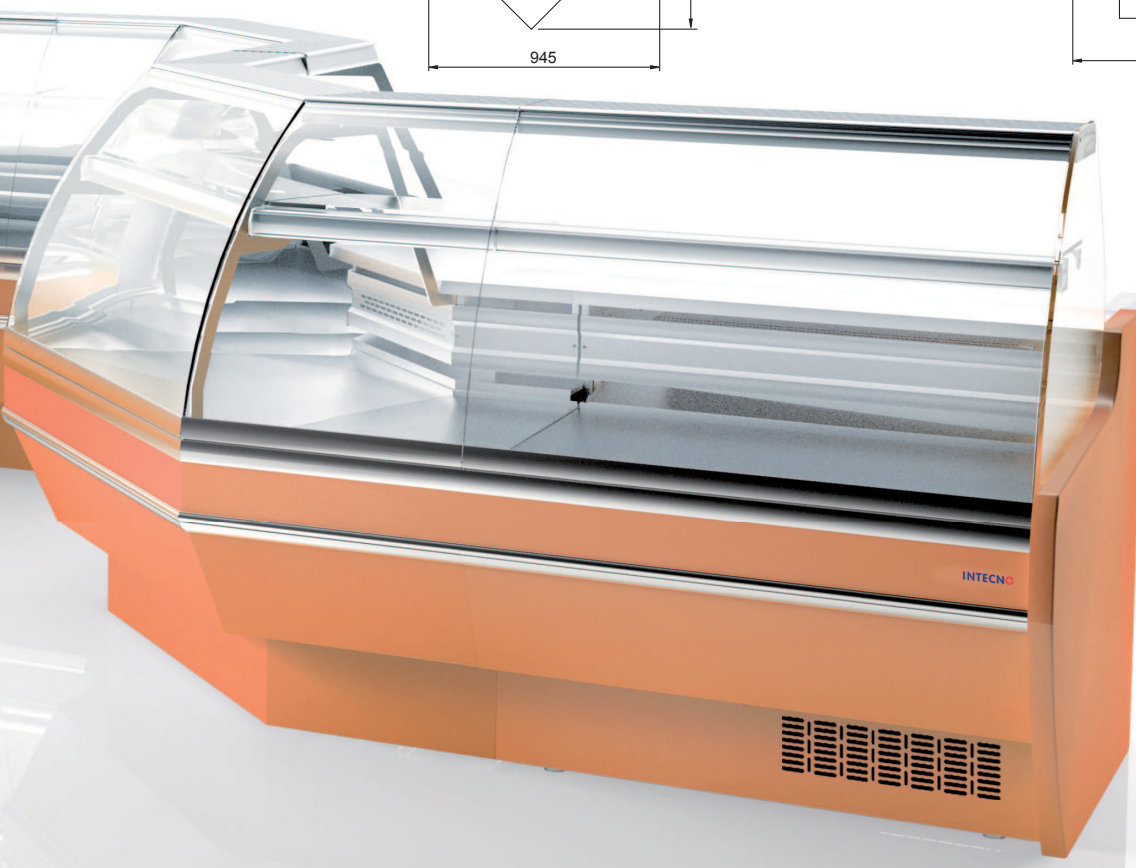




|                |  |
|----------------|--|
| CO-CVP-9-10-RR |  |
| CO-CVP-9-13-RR |  |
| CO-CVP-9-15-RR |  |
| CO-CVP-9-20-RR |  |
| CO-CVP-9-25-RR |  |
| CO-CVP-9-30-RR |  |



|               |  |
|---------------|--|
| CO-CVP-9-10-C |  |
| CO-CVP-9-13-C |  |
| CO-CVP-9-15-C |  |
| CO-CVP-9-20-C |  |
| CO-CVP-9-25-C |  |
| CO-CVP-9-30-C |  |



|                |  |
|----------------|--|
| CO-CVP-9-10-CC |  |
| CO-CVP-9-13-CC |  |
| CO-CVP-9-15-CC |  |
| CO-CVP-9-20-CC |  |
| CO-CVP-9-25-CC |  |
| CO-CVP-9-30-CC |  |

| ref.        | largo length (mm) | exposición display (m²) | reserva cold storage (m³) | puertas doors (uds) | potencia frig. frig. power (W) | consumo consumption (A) | consumo consumption (KW/24h) | refrigerante coolant |
|-------------|-------------------|-------------------------|---------------------------|---------------------|--------------------------------|-------------------------|------------------------------|----------------------|
| CO-CVP-9-10 | 1055              | 0,61                    | 0,33                      | 1                   | 410                            | 4.32                    | 10.9                         | R-404A               |
| CO-CVP-9-13 | 1305              | 0,80                    | 0,43                      | 2                   | 550                            | 5.92                    | 14.9                         | R-404A               |
| CO-CVP-9-15 | 1525              | 0,93                    | 0,49                      | 2                   | 675                            | 6.49                    | 16.4                         | R-404A               |
| CO-CVP-9-20 | 2025              | 1,24                    | 0,67                      | 3                   | 880                            | 7.04                    | 17.8                         | R-404A               |
| CO-CVP-9-25 | 2525              | 1,56                    | 0,84                      | 4                   | 1050                           | 7.06                    | 17.8                         | R-404A               |
| CO-CVP-9-30 | 2995              | 1,97                    | 1,19                      | 4                   | 1480                           | 8.71                    | 22.1                         | R-404A               |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Diseño especial para pastelería, con dos estantes
- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Costados de 40 mm en ABS inyectado
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación estándar: encimera superior, estante y base frontal
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270
- Evaporador estático, opcional ventilado
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático, opcional por resistencia eléctrica
- Clase climática 3 (25°C 60%HR) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Design focused for bakery, with two shelves
- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- Sides in ABS injected, 40 mm thick
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass hinges forward
- Glass shelf non refrigerated
- Standard lighting: top worktop, shelf and frontal base
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors 440x270
- Static evaporator, ventilated as optional
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Climate class 3 (25°C 60%HR) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

#### Opciones - Options

| ref.        | madera o lacado sólo frontal<br>lacquered or wood only front | madera o lacado incluidos costados<br>lacquered or wood including sides | lacado alto brillo<br>High glossy lacquered | ventilada<br>ventilated | cierre plexi<br>plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | sin reserva CVPS<br>no cooled storage | neutra<br>neutral | remoto<br>remote |
|-------------|--------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------|-------------------------|-----------------------------|-----------------------------|-------------------------|---------------------------------------|-------------------|------------------|
| CO-CVP-9-10 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                                       |                   |                  |
| CO-CVP-9-13 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                                       |                   |                  |
| CO-CVP-9-15 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                                       |                   |                  |
| CO-CVP-9-20 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                                       |                   |                  |
| CO-CVP-9-25 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                                       |                   |                  |
| CO-CVP-9-30 |                                                              |                                                                         |                                             |                         |                             |                             |                         |                                       |                   |                  |

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

230v 60Hz / 115v 60Hz consultar - consult


guías 40x60 por puerta 40x60 runners per door

guías 40x60 opcionales (sólo con evaporador estático)  
optional 40x60 runners (only with static evaporator)






*Vitrina expositora modular serie 9 SELECTA PASTELERÍA con reserva*  
*Serve over counter modular line 9 PASTRY SELECTA with cold storage*




DE SERIE  
STANDAR

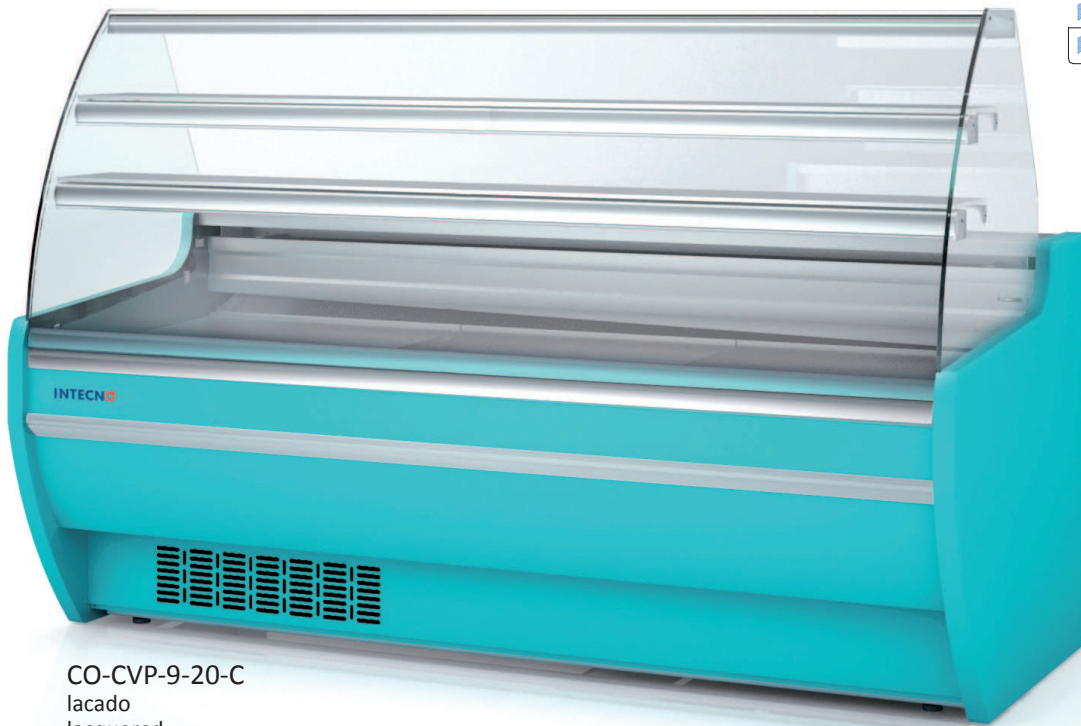

CO-CVP-9-20-C  
lacado  
lacquered




CO-CVP-9-20-CC  
madera  
wood



frente un color  
one color front decor





frontal decorado  
front decor

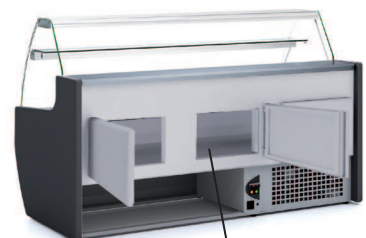

interior 440x270

ÁNGULOS REFRIGERADOS / REFRIGERATED ANGLE





|                   |  |
|-------------------|--|
| CO-CVP-9-AP90-C   |  |
| CO-CVP-9-AP90-RR  |  |
| CO-CVPS-9-AP90-C  |  |
| CO-CVPS-9-AP90-RR |  |

|                   |  |
|-------------------|--|
| CO-CV-9-AN90-C    |  |
| CO-CVP-9-AN90-RR  |  |
| CO-CVS-9-AN90-C   |  |
| CO-CVPS-9-AN90-RR |  |

características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible, dos versiones disponibles
- Estantes de cristal intermedios, no refrigerados
- Iluminación estándar: encimera superior, estante inferior y base frontal
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
- Estante de apoyo en la zona de servicio
- Evaporador ventilado
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático, opcional por resistencia eléctrica
- Evaporación automática de serie
- Clase climática 3 (25°C 60%HR) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006



|                   |  |
|-------------------|--|
| CO-CVP-9-RP90-C   |  |
| CO-CVP-9-RP90-RR  |  |
| CO-CVPS-9-RP90-C  |  |
| CO-CVPS-9-RP90-RR |  |

|                   |  |
|-------------------|--|
| CO-CV-9-RN90-C    |  |
| CO-CVP-9-RN90-RR  |  |
| CO-CVS-9-RN90-C   |  |
| CO-CVPS-9-RN90-RR |  |

we reserve the right to change specifications without prior notice

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass hinges forward, two versions available
- Glass shelves non refrigerated
- Standard lighting: top worktop, shelf and front base
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
- Auxiliary shelf in the rear side
- Ventilated evaporator
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Standard automatic evaporation
- Climate class 3 (25°C 60%HR) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006



Opciones - Options

|                                                                           |                                                                    |                                                                                    |                                                                             |                             |                         |                                   |                   |                  |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|
| sólo frontal, inox lacado ó madera<br>only front, inox, lacquered or wood | sólo frontal lacado alto brillo<br>only front High gloss lacquered | costados + frontal, inox lacado ó madera<br>sides + front, inox, lacquered or wood | costados + frontal lacado alto brillo<br>sides + front High gloss lacquered | luz extra<br>extra lighting | LED blanco<br>white LED | cierre plexi<br>plexi slide doors | neutro<br>neutral | remoto<br>remote |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|

230v 60Hz / 115v 60Hz


consultar - consult

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included



|                    |  |
|--------------------|--|
| CO-CVP-9N-AP45-C   |  |
| CO-CVP-9N-AP45-RR  |  |
| CO-CVPS-9N-AP45-C  |  |
| CO-CVPS-9N-AP45-RR |  |

|                    |  |
|--------------------|--|
| CO-CVP-9N-AN45-C   |  |
| CO-CVP-9N-AN45-RR  |  |
| CO-CVPS-9N-AN45-C  |  |
| CO-CVPS-9N-AN45-RR |  |

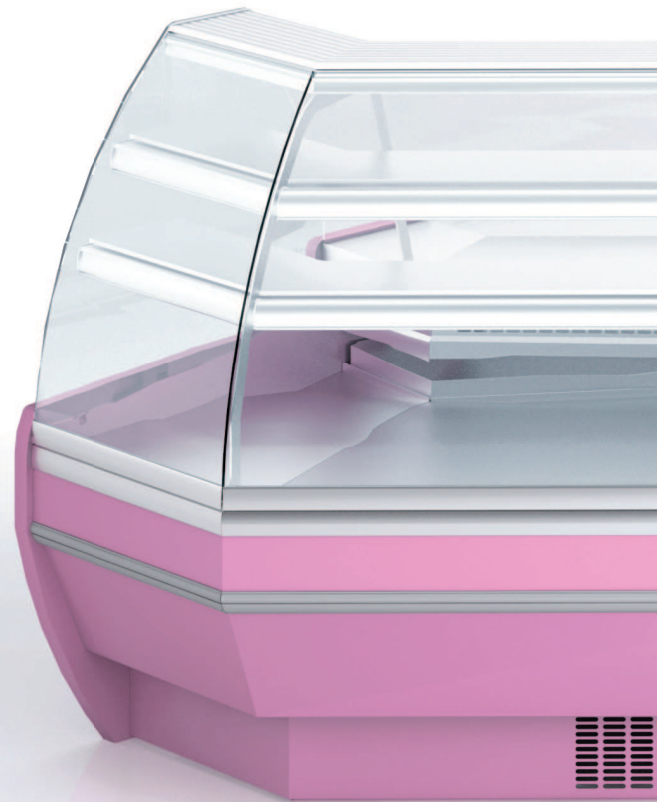


Vitrina expositora modular serie 9 SELECTA PASTELERÍA con reserva  
Serve over counter modular line 9 PASTRY SELECTA with cold storage

MUEBLES NEUTROS CAJA\* / CASH NEUTRAL COUNTER\*


\*TODOS INCORPORAN CAJÓN, ESTANTES Y ENCHUFE/  
SUPPLIED WITH DRAWER, SHELVES AND PLUG




Detalle mueble caja (trasero)  
Cash counter (rear view)

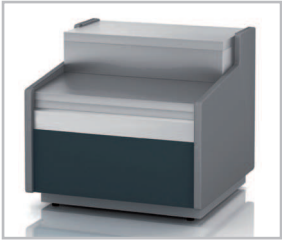

Detalle mueble caja (frente)  
Cash counter (front view)




|                         |  |
|-------------------------|--|
| CO-CMCVP-9-8            |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

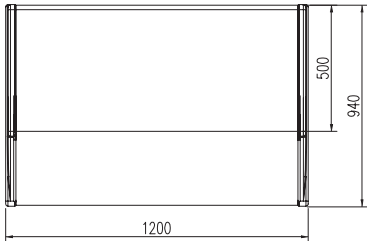


|                         |  |
|-------------------------|--|
| CO-CMCVP-9-12           |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |

MUEBLE CAJA NEUTROS EN ÁNGULO /  
ANGULAR NEUTRAL CASH COUNTER

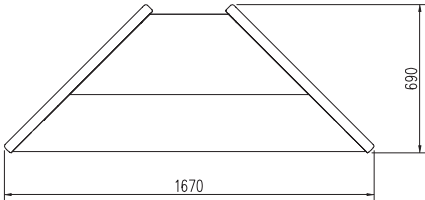


|                 |  |
|-----------------|--|
| CO-CMCVP-9-RP90 |  |
|-----------------|--|

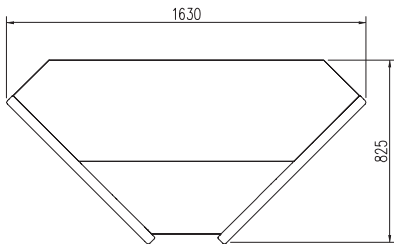


|                 |  |
|-----------------|--|
| CO-CMCVP-9-RN90 |  |
|-----------------|--|

ÁNGULOS NEUTROS / NEUTRAL ANGLE

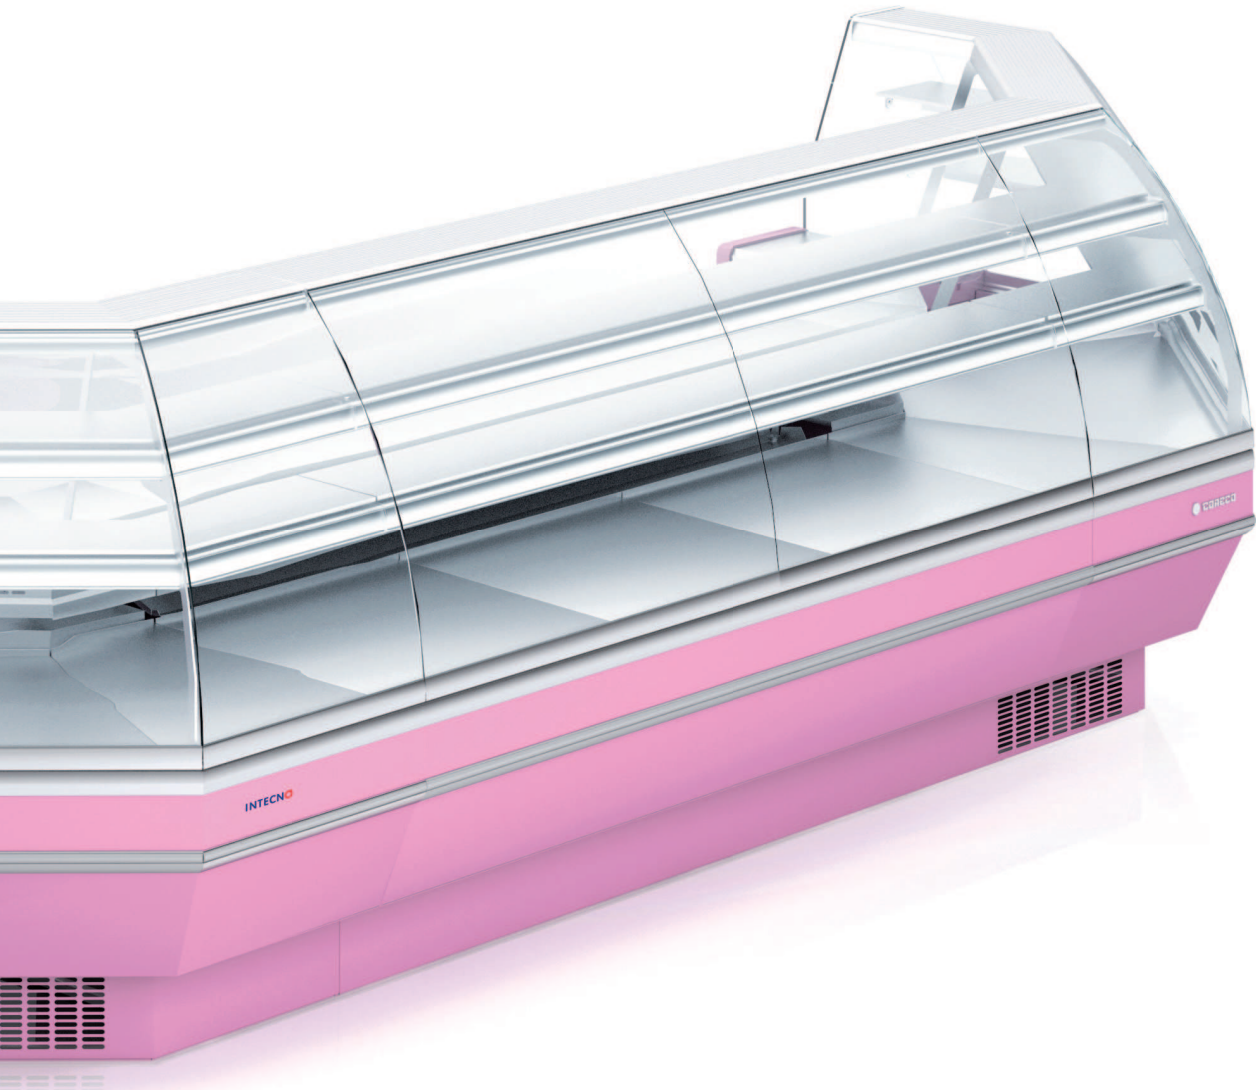




|                 |  |
|-----------------|--|
| CO-CVEA-9-10-TF |  |
| CO-CVEA-9-13-TF |  |
| CO-CVEA-9-15-TF |  |
| CO-CVEA-9-20-TF |  |
| CO-CVEA-9-25-TF |  |
| CO-CVEA-9-30-TF |  |



|              |  |
|--------------|--|
| CO-CVEE-9-10 |  |
| CO-CVEE-9-13 |  |
| CO-CVEE-9-15 |  |
| CO-CVEE-9-20 |  |
| CO-CVEE-9-25 |  |
| CO-CVEE-9-30 |  |



| ref.         | largo length (mm) | cámara storage (m³) | exposición display (m²) | puertas doors (uds) | potencia frig. frig. power (W) | consumo consumption (A) | consumo consumption (KW/24h) | refrigerante coolant |
|--------------|-------------------|---------------------|-------------------------|---------------------|--------------------------------|-------------------------|------------------------------|----------------------|
| CO-CVEA-9-10 | 1055              | 0,33                | 0,61                    | 1                   | 410                            | 4.32                    | 10.9                         | R-404A               |
| CO-CVEA-9-13 | 1305              | 0,43                | 0,80                    | 2                   | 550                            | 5.92                    | 14.9                         | R-404A               |
| CO-CVEA-9-15 | 1525              | 0,49                | 0,93                    | 2                   | 675                            | 6.49                    | 16.4                         | R-404A               |
| CO-CVEA-9-20 | 2025              | 0,67                | 1,24                    | 3                   | 880                            | 7.04                    | 17.8                         | R-404A               |
| CO-CVEA-9-25 | 2525              | 0,84                | 1,56                    | 4                   | 1050                           | 7.06                    | 17.8                         | R-404A               |
| CO-CVEA-9-30 | 2995              | 1,19                | 1,97                    | 4                   | 1480                           | 8.71                    | 22.1                         | R-404A               |
| CO-CVEE-9-10 | 1055              | 0,33                | 0,61                    | 1                   | 410                            | 4.32                    | 10.9                         | R-404A               |
| CO-CVEE-9-13 | 1305              | 0,43                | 0,80                    | 2                   | 550                            | 5.92                    | 14.9                         | R-404A               |
| CO-CVEE-9-15 | 1525              | 0,49                | 0,93                    | 2                   | 675                            | 6.49                    | 16.4                         | R-404A               |
| CO-CVEE-9-20 | 2025              | 0,67                | 1,24                    | 3                   | 880                            | 7.04                    | 17.8                         | R-404A               |
| CO-CVEE-9-25 | 2525              | 0,84                | 1,56                    | 4                   | 1050                           | 7.06                    | 17.8                         | R-404A               |
| CO-CVEE-9-30 | 2995              | 1,19                | 1,97                    | 4                   | 1480                           | 8.71                    | 22.1                         | R-404A               |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
  - Plano exposición y encimera en acero inox AISI-304
  - Bandejas plano de exposición lisas, con escalón al mismo precio
  - Costados de 40 mm en ABS inyectado excepto acabado madera
  - Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
  - Paragolpes en la parte delantera
  - Cristal frontal auto-servicio
  - Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
  - Evaporador ventilado
  - Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
  - Control electrónico de temperatura
  - Indicador de temperatura
  - Descarche automático, opcional por resistencia eléctrica
  - Clase climática 3 (25°C 60%HR) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
  - Display area and counter in stainless steel AISI-304
  - Smooth deck for display area, stepped at same price
  - 40 mm sides in injected ABS, except wood decor, two version available
  - Standard decoration: short dark gray sides gray front+ blue decorative stripe
  - Anodised aluminium profiles
  - Front rubber bumper
  - Self-service frontal glass
  - 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
  - Ventilated evaporator
  - Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
  - Electronic temperature controller
  - External thermometer
  - Auto defrost, by heated cable as optional
  - Climate class 3 (25°C 60%HR) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

#### Opciones - Options

| ref.        | madera o lacado sólo frontal<br>lacquered or wood only front | madera o lacado incluidos costados<br>lacquered or wood including sides | lacado alto brillo<br>High glossy lacquered | cierre plexi<br>CVEE plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | neutra<br>neutral | remoto<br>remote |
|-------------|--------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------|----------------------------------|-----------------------------|-------------------------|-------------------|------------------|
| CO-CVE-9-10 |                                                              |                                                                         |                                             |                                  |                             |                         |                   |                  |
| CO-CVE-9-13 |                                                              |                                                                         |                                             |                                  |                             |                         |                   |                  |
| CO-CVE-9-15 |                                                              |                                                                         |                                             |                                  |                             |                         |                   |                  |
| CO-CVE-9-20 |                                                              |                                                                         |                                             |                                  |                             |                         |                   |                  |
| CO-CVE-9-25 |                                                              |                                                                         |                                             |                                  |                             |                         |                   |                  |
| CO-CVE-9-30 |                                                              |                                                                         |                                             |                                  |                             |                         |                   |                  |


Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

230v 60Hz / 115v 60Hz consultar - consult


*Vitrina expositora modular serie 9 AUTOSERVICIO, con reserva*  
*Serve over counter modular line 9 SELF SERVICE, with cold storage*




CO-CVEA-9-20  
 personalizada  
 customized

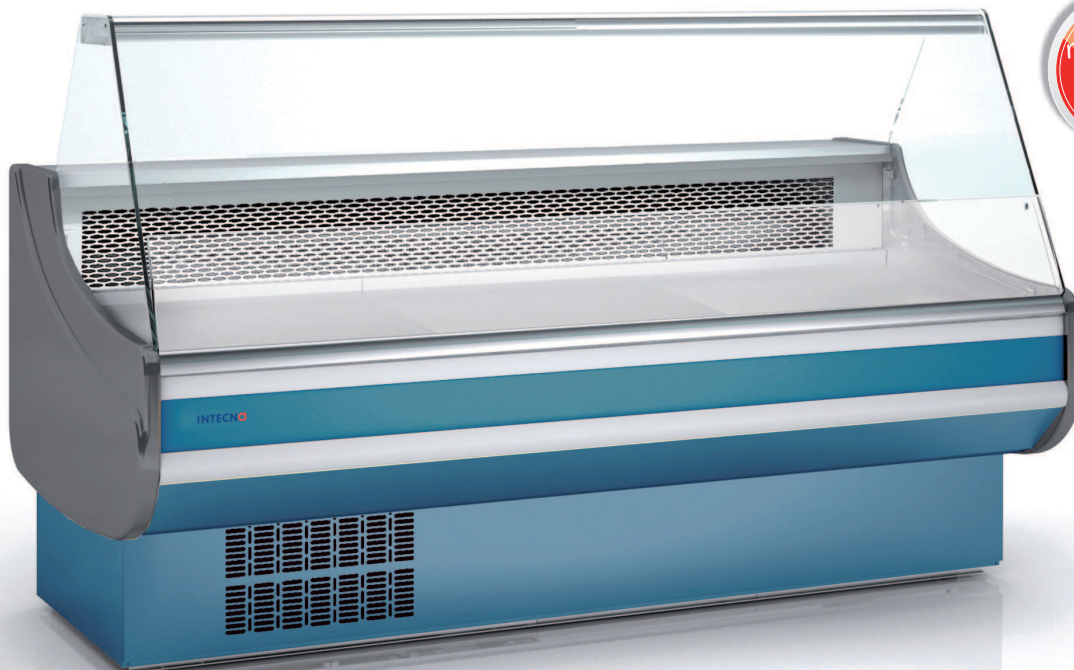


CO-CVEE-9-20  
 lacado  
 lacquered

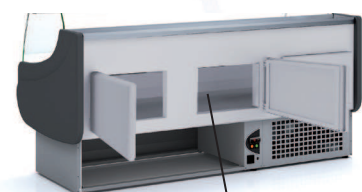


interior 440x270

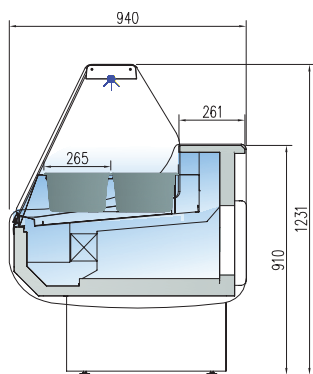

|                    |  |
|--------------------|--|
| CO-CVE-9ES-10-R-TF |  |
| CO-CVE-9ES-13-R-TF |  |
| CO-CVE-9ES-15-R-TF |  |
| CO-CVE-9ES-20-R-TF |  |
| CO-CVE-9ES-25-R-TF |  |
| CO-CVE-9ES-30-R-TF |  |

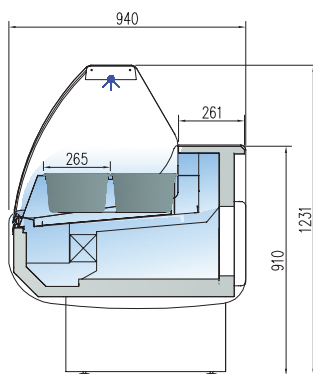

|                    |  |
|--------------------|--|
| CO-CVE-9ES-10-C-TF |  |
| CO-CVE-9ES-13-C-TF |  |
| CO-CVE-9ES-15-C-TF |  |
| CO-CVE-9ES-20-C-TF |  |
| CO-CVE-9ES-25-C-TF |  |
| CO-CVE-9ES-30-C-TF |  |

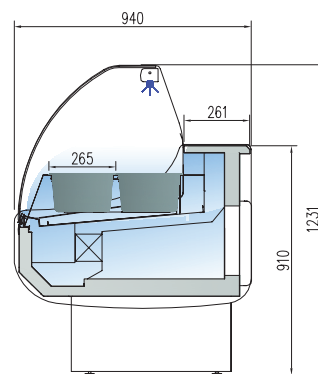

|                     |  |
|---------------------|--|
| CO-CVE-9ES-10-CC-TF |  |
| CO-CVE-9ES-13-CC-TF |  |
| CO-CVE-9ES-15-CC-TF |  |
| CO-CVE-9ES-20-CC-TF |  |
| CO-CVE-9ES-25-CC-TF |  |
| CO-CVE-9ES-30-CC-TF |  |

Cubetas GN NO incluidas en el precio - GN containers NOT included in price  
ver página 390 - see page 390

| ref.           | largo<br>length<br>(mm) | exposición<br>display<br>(m²) | capacidad<br>capacity<br>GN1/4-150 | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(A) | consumo<br>consumption<br>(KW/24h) | refrigerante<br>coolant |
|----------------|-------------------------|-------------------------------|------------------------------------|--------------------------------------|-------------------------------|------------------------------------|-------------------------|
| CO-CVE-9-10-TF | 1055                    | 0,61                          | 10                                 | 410                                  | 4.32                          | 10.9                               | R-404A                  |
| CO-CVE-9-13-TF | 1305                    | 0,80                          | 12                                 | 550                                  | 5.92                          | 14.9                               | R-404A                  |
| CO-CVE-9-15-TF | 1525                    | 0,93                          | 16                                 | 675                                  | 6.49                          | 16.4                               | R-404A                  |
| CO-CVE-9-20-TF | 2025                    | 1,24                          | 20                                 | 880                                  | 7.04                          | 17.8                               | R-404A                  |
| CO-CVE-9-25-TF | 2525                    | 1,56                          | 24                                 | 1050                                 | 7.06                          | 17.8                               | R-404A                  |
| CO-CVE-9-30-TF | 2995                    | 1,97                          | 32                                 | 1480                                 | 8.71                          | 22.1                               | R-404A                  |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Plano de exposición, con alojamientos para cubetas GN, fondo máximo 150 mm (cubetas no incluidas)
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Iluminación estándar: encimera
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada
- Evaporador ventilado
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático, opcional por resistencia eléctrica
- Clase climática 3 (25°C 60%HR) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Plan of exposure for GN trays, maximum depth 150 mm (trays not included)
- 40 mm sides in injected ABS, except wood decor, two version available
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass hinges forward
- Standard lighting: top worktop
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated storage area
- Ventilated evaporator
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Climate class 3 (25°C 60%HR) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

### Opciones - Options


| ref.        | madera o lacado sólo<br>fontal<br>lacquered or wood only<br>front | madera o lacado<br>incluidos costados<br>lacquered or wood<br>including sides | lacado<br>alto brillo<br>Hight glossy<br>lacquered | cierre plexi<br>plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | neutra<br>neutral | remoto<br>remote |
|-------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------|----------------------------------------------------|-----------------------------|-----------------------------|-------------------------|-------------------|------------------|
| CO-CVE-9-10 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |
| CO-CVE-9-13 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |
| CO-CVE-9-15 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |
| CO-CVE-9-20 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |
| CO-CVE-9-25 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |
| CO-CVE-9-30 |                                                                   |                                                                               |                                                    |                             |                             |                         |                   |                  |

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included


230v 60Hz / 115v 60Hz consultar - consult



*Vitrina expositora modular serie 9, alojamientos cubetas GN*  
*Serve over counter modular line 9, GN containers fits*




opción costado compacto  
 long sides option



DE SERIE  
 STANDAR




CO-CVE-9ES-13-C

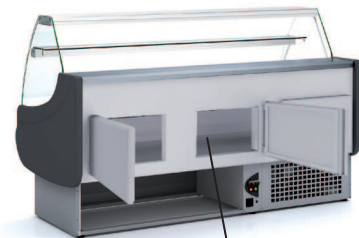


interior 440x270


CO-CVE-9ES-10




CO-CVE-9ES-20




CO-CVE-9ES-13




CO-CVE-9ES-25






CO-CVE-9ES-15



CO-CVE-9ES-30



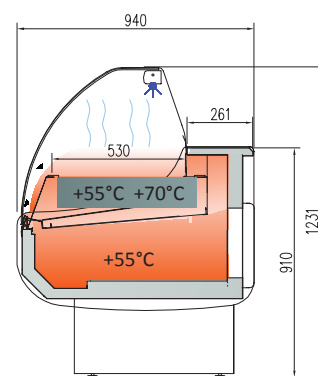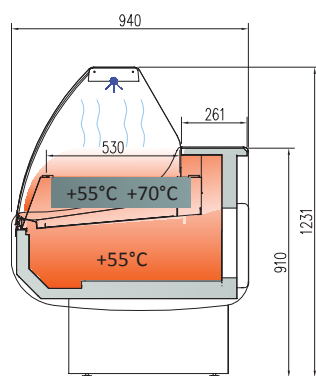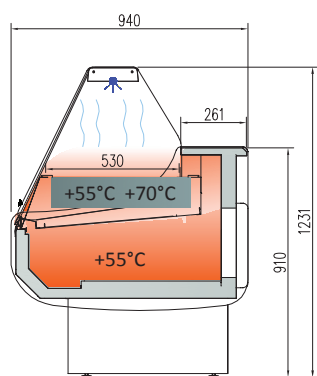

| calor seco - dry heating | baño maria - bain marie |
|--------------------------|-------------------------|
| CO-CVE-9HE-10-R          | CO-CVE-9BM-10-R         |
| CO-CVE-9HE-13-R          | CO-CVE-9BM-13-R         |
| CO-CVE-9HE-15-R          | CO-CVE-9BM-15-R         |
| CO-CVE-9HE-20-R          | CO-CVE-9BM-20-R         |
| CO-CVE-9HE-25-R          | CO-CVE-9BM-25-R         |
| CO-CVE-9HE-30-R          | CO-CVE-9BM-30-R         |

| calor seco - dry heating | baño maria - bain marie |
|--------------------------|-------------------------|
| CO-CVE-9HE-10-C          | CO-CVE-9BM-10-C         |
| CO-CVE-9HE-13-C          | CO-CVE-9BM-13-C         |
| CO-CVE-9HE-15-C          | CO-CVE-9BM-15-C         |
| CO-CVE-9HE-20-C          | CO-CVE-9BM-20-C         |
| CO-CVE-9HE-25-C          | CO-CVE-9BM-25-C         |
| CO-CVE-9HE-30-C          | CO-CVE-9BM-30-C         |

| calor seco - dry heating | baño maria - bain marie |
|--------------------------|-------------------------|
| CO-CVE-9HE-10-CC         | CO-CVE-9BM-10-CC        |
| CO-CVE-9HE-13-CC         | CO-CVE-9BM-13-CC        |
| CO-CVE-9HE-15-CC         | CO-CVE-9BM-15-CC        |
| CO-CVE-9HE-20-CC         | CO-CVE-9BM-20-CC        |
| CO-CVE-9HE-25-CC         | CO-CVE-9BM-25-CC        |
| CO-CVE-9HE-30-CC         | CO-CVE-9BM-30-CC        |

Cubetas GN NO incluidas en el precio - GN containers NOT included in price  
ver página 390 - see page 390

| ref.          | largo<br>length<br>(mm) | exposición<br>display<br>(m²) | potencia<br>power<br>(W) | consumo<br>consumption<br>(A) |
|---------------|-------------------------|-------------------------------|--------------------------|-------------------------------|
| CO-CVE-9HE-10 | 1055                    | 0,61                          | 800                      | 3,6                           |
| CO-CVE-9HE-13 | 1305                    | 0,80                          | 1200                     | 5,35                          |
| CO-CVE-9HE-15 | 1525                    | 0,93                          | 1600                     | 7,11                          |
| CO-CVE-9HE-20 | 2025                    | 1,24                          | 2000                     | 8,95                          |
| CO-CVE-9HE-25 | 2525                    | 1,56                          | 2400                     | 10,72                         |
| CO-CVE-9HE-30 | 2995                    | 1,97                          | 3200                     | 14,22                         |

características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Plano de exposición, con alojamiento para cubetas GN, fondo máximo 150 mm (cubetas no incluidas)
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva caliente
- Iluminación estándar: encimera superior
- HE: Sistema de calor seco
- BM: Sistema baño maría, llenado manual
- Resistencia silicona adhesiva bajo el plano de exposición
- Control electrónico de temperatura
- Indicador de temperatura
- Temperatura de trabajo +55°C +70°C

| ref.          | largo<br>length<br>(mm) | exposición<br>display<br>(m²) | potencia<br>power<br>(W) | consumo<br>consumption<br>(A) |
|---------------|-------------------------|-------------------------------|--------------------------|-------------------------------|
| CO-CVE-9BM-10 | 1055                    | 0,61                          | 1500                     | 6,65                          |
| CO-CVE-9BM-13 | 1305                    | 0,80                          | 2250                     | 9,91                          |
| CO-CVE-9BM-15 | 1525                    | 0,93                          | 3000                     | 13,2                          |
| CO-CVE-9BM-20 | 2025                    | 1,24                          | 3000                     | 13,3                          |
| CO-CVE-9BM-25 | 2525                    | 1,56                          | 4500                     | 19,85                         |
| CO-CVE-9BM-30 | 2995                    | 1,97                          | 6000                     | 26,4                          |

we reserve the right to change specifications without prior notice

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Plan of exposure for GN trays, max depth 150 mm (trays not included)
- 40 mm sides in injected ABS, except wood decor, two version available
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass hinges forward
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Standard lighting: top worktop
- Hot storage area
- HE: Dry heating system
- BM: Bain marie system, manual fill up
- Resistance silicone adhesive below the plane of exposure
- Electronic temperature controller
- External thermometer
- Working temperature +55°C +70°C


### Opciones - Options

| ref.        | madera o lacado sólo<br>fontal<br>lacquered or wood only<br>front | madera o lacado<br>incluidos costados<br>lacquered or wood<br>including sides | lacado<br>alto brillo<br>High glossy<br>lacquered | cierre plexi<br>plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | neutra<br>neutral |
|-------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------|-----------------------------|-----------------------------|-------------------------|-------------------|
| CO-CVE-9-10 |                                                                   |                                                                               |                                                   |                             |                             |                         |                   |
| CO-CVE-9-13 |                                                                   |                                                                               |                                                   |                             |                             |                         |                   |
| CO-CVE-9-15 |                                                                   |                                                                               |                                                   |                             |                             |                         |                   |
| CO-CVE-9-20 |                                                                   |                                                                               |                                                   |                             |                             |                         |                   |
| CO-CVE-9-25 |                                                                   |                                                                               |                                                   |                             |                             |                         |                   |
| CO-CVE-9-30 |                                                                   |                                                                               |                                                   |                             |                             |                         |                   |

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

230v 60Hz / 115v 60Hz consultar - consult

*Vitrina caliente expositora modular serie 9, calor seco o baño maria*  
*Hot serve over counter modular line 9, dry heating or bain marie*



opción costado compacto  
long sides option




CO-CVE-9BM-13-C




CO-CVE-9HE-13-C


CO-CVE-9HE-10  
CO-CVE-9BM-10




CO-CVE-9HE-20  
CO-CVE-9BM-20




CO-CVE-9HE-13  
CO-CVE-9BM-13





CO-CVE-9HE-25  
CO-CVE-9BM-25



CO-CVE-9HE-15  
CO-CVE-9BM-15




CO-CVE-9HE-30  
CO-CVE-9BM-30

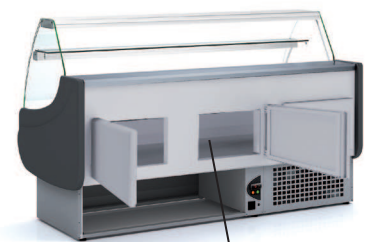


interior 440x270




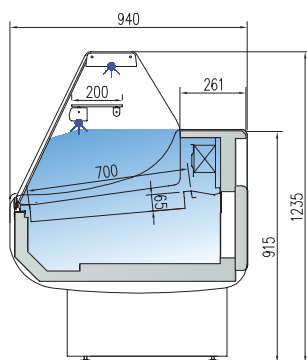

|                 |  |
|-----------------|--|
| CO-CVE-9-10-R-P |  |
| CO-CVE-9-13-R-P |  |
| CO-CVE-9-15-R-P |  |
| CO-CVE-9-20-R-P |  |
| CO-CVE-9-25-R-P |  |
| CO-CVE-9-30-R-P |  |

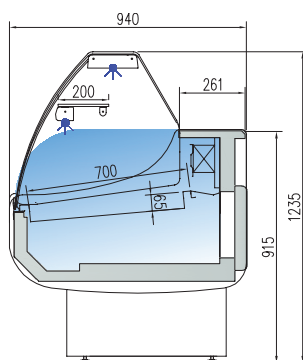

|                 |  |
|-----------------|--|
| CO-CVE-9-10-C-P |  |
| CO-CVE-9-13-C-P |  |
| CO-CVE-9-15-C-P |  |
| CO-CVE-9-20-C-P |  |
| CO-CVE-9-25-C-P |  |
| CO-CVE-9-30-C-P |  |

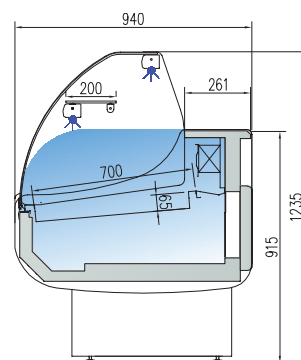

|                  |  |
|------------------|--|
| CO-CVE-9-10-CC-P |  |
| CO-CVE-9-13-CC-P |  |
| CO-CVE-9-15-CC-P |  |
| CO-CVE-9-20-CC-P |  |
| CO-CVE-9-25-CC-P |  |
| CO-CVE-9-30-CC-P |  |

| ref.          | largo<br>length<br>(mm) | cámara<br>storage<br>(m³) | exposición<br>display<br>(m²) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(A) | consumo<br>consumption<br>(KW/24h) | refrigerante<br>coolant |
|---------------|-------------------------|---------------------------|-------------------------------|---------------------------|--------------------------------------|-------------------------------|------------------------------------|-------------------------|
| CO-CVE-9-10-P | 1055                    | 0,33                      | 0,61                          | 1                         | 410                                  | 4.32                          | 10.9                               | R-404A                  |
| CO-CVE-9-13-P | 1305                    | 0,43                      | 0,80                          | 2                         | 550                                  | 5.92                          | 14.9                               | R-404A                  |
| CO-CVE-9-15-P | 1525                    | 0,49                      | 0,93                          | 2                         | 675                                  | 6.49                          | 16.4                               | R-404A                  |
| CO-CVE-9-20-P | 2025                    | 0,67                      | 1,24                          | 3                         | 880                                  | 7.04                          | 17.8                               | R-404A                  |
| CO-CVE-9-25-P | 2525                    | 0,84                      | 1,56                          | 4                         | 1050                                 | 7.06                          | 17.8                               | R-404A                  |
| CO-CVE-9-30-P | 2995                    | 1,19                      | 1,97                          | 4                         | 1480                                 | 8.71                          | 22.1                               | R-404A                  |

características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior e interior en chapa de acero plastificada
- Encimera de trabajo en acero inox AISI-304 (opcional AISI-316)
- Plano de exposición hermético de altura 65 mm, con desagüe canalizado al exterior, fabricado en acero inox AISI-316, placa fría opcional
- Protector frontal evaporador en AISI-316
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Estante de cristal intermedio, no refrigerado
- Iluminación estándar: encimera superior y estante
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270 (excepto modelo neutro)
- Evaporador estático
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático, opcional por resistencia eléctrica
- Clase climática 3 (25°C 60%HR) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

we reserve the right to change specifications without prior notice

- Interior and exterior finish in plastic coated steel
- Worktop in stainless steel AISI-304 (optional AISI-316)
- Exposure level hermetic 65mm height, with drainage channeled up to the outside, made of stainless steel. AISI-316, cold plate as optional
- 40 mm sides in injected ABS, except wood decor, two version available
- AISI-316 stainless steel evaporator front cover
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass hinges forward
- Glass shelf non refrigerated
- Standard lighting: top worktop and shelf
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors 440x270 free (except for ambient models)
- Static evaporator
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Climate class 3 (25°C 60%HR) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006


### Opciones - Options

| ref.        | madera o lacado sólo<br>lacquered or wood only<br>front | madera o lacado<br>incluidos costados<br>lacquered or wood<br>including sides | lacado<br>alto brillo<br>High glossy<br>lacquered | encimera<br>AISI-316<br>worktop<br>AISI-316 | cierre plexi<br>plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | placa fría<br>cold plate | remoto<br>remote |
|-------------|---------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------|---------------------------------------------|-----------------------------|-----------------------------|-------------------------|--------------------------|------------------|
| CO-CVE-9-10 |                                                         |                                                                               |                                                   |                                             |                             |                             |                         |                          |                  |
| CO-CVE-9-13 |                                                         |                                                                               |                                                   |                                             |                             |                             |                         |                          |                  |
| CO-CVE-9-15 |                                                         |                                                                               |                                                   |                                             |                             |                             |                         |                          |                  |
| CO-CVE-9-20 |                                                         |                                                                               |                                                   |                                             |                             |                             |                         |                          |                  |
| CO-CVE-9-25 |                                                         |                                                                               |                                                   |                                             |                             |                             |                         |                          |                  |
| CO-CVE-9-30 |                                                         |                                                                               |                                                   |                                             |                             |                             |                         |                          |                  |

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

230v 60Hz / 115v 60Hz consultar - consult

*Vitrina expositora especial pescado serie 9*  
*Fish serve over counter line 9*



opción costado compacto  
long sides option

Plano exposición AISI-316  
AISI-316 exposure




CO-CVE-9-20-C-P

VITRINAS  
EXPOSITORAS



interior 440x270

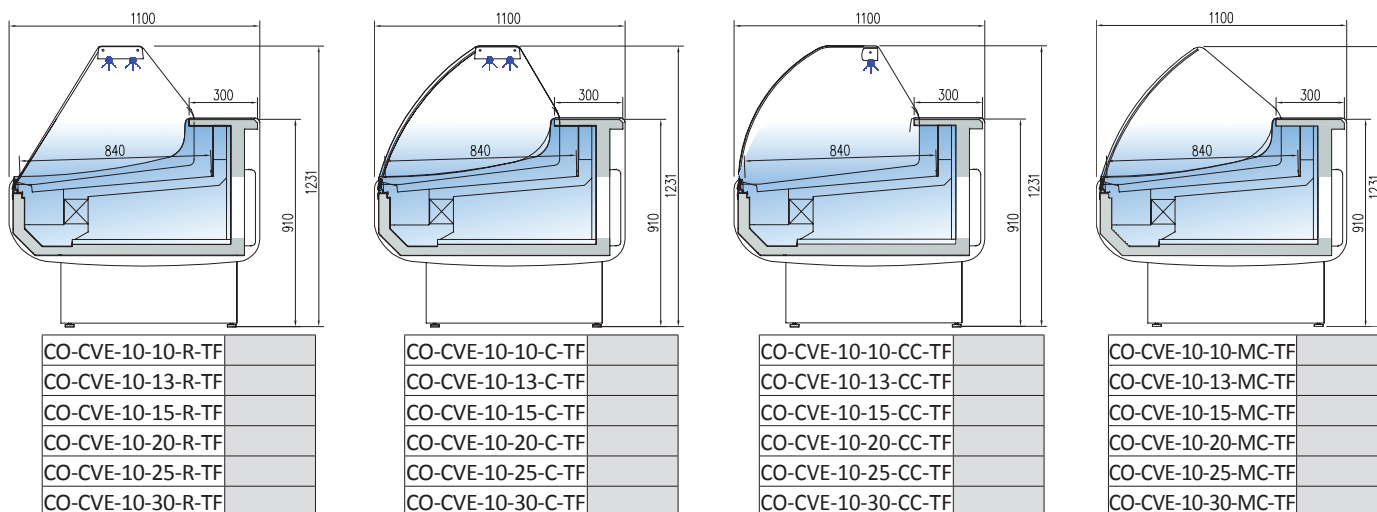

| ref.         | largo<br>length<br>(mm) | exposición<br>display<br>(m²) | CVE reserva<br>cold storge<br>(m³) | CVE puertas<br>doors<br>(uds) | CVES reserva<br>cold storge<br>(m³) | CVES puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(A) | consumo<br>consumption<br>(KW/24h) | refrigerante<br>coolant |
|--------------|-------------------------|-------------------------------|------------------------------------|-------------------------------|-------------------------------------|--------------------------------|--------------------------------------|-------------------------------|------------------------------------|-------------------------|
| CO-CVE-10-10 | 1055                    | 0,75                          | 0,38                               | 1                             | 0                                   | 0                              | 545                                  | 4.32                          | 10.9                               | R-404A                  |
| CO-CVE-10-13 | 1305                    | 0,98                          | 0,5                                | 2                             | 0                                   | 0                              | 635                                  | 5.92                          | 14.9                               | R-404A                  |
| CO-CVE-10-15 | 1525                    | 1,13                          | 0,58                               | 2                             | 0                                   | 0                              | 855                                  | 6.49                          | 16.4                               | R-404A                  |
| CO-CVE-10-20 | 2025                    | 1,52                          | 0,79                               | 3                             | 0                                   | 0                              | 1050                                 | 7.04                          | 17.8                               | R-404A                  |
| CO-CVE-10-25 | 2525                    | 1,91                          | 0,99                               | 4                             | 0                                   | 0                              | 1220                                 | 7.06                          | 17.8                               | R-404A                  |
| CO-CVE-10-30 | 2995                    | 2,30                          | 1,25                               | 4                             | 0                                   | 0                              | 1755                                 | 8.71                          | 22.1                               | R-404A                  |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado- Paragolpes en la parte delantera
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Iluminación estándar: encimera superior
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Evaporador ventilado, opcional estático
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático, opcional por resistencia eléctrica
- Clase climática 3 (25°C 60%HR) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- 40 mm sides in injected ABS, except wood decor, two version available
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass hinges forward
- Standard lighting: top worktop
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Ventilated evaporator, static as optional
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Climate class 3 (25°C 60%HR) regime M1


M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

| ref.         | madera o lacado sólo<br>fontal<br>lacquered or wood only<br>front | madera o lacado<br>incluidos costados<br>lacquered or wood<br>including sides | lacado<br>alto brillo<br>High glossy<br>lacquered | estática<br>static | cierre plexi<br>plexi doors | luz extra<br>extra lighting | LED blanco<br>white LED | neutra<br>neutral | remoto<br>remote |
|--------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------|--------------------|-----------------------------|-----------------------------|-------------------------|-------------------|------------------|
| CO-CVE-10-10 |                                                                   |                                                                               |                                                   |                    |                             |                             |                         |                   |                  |
| CO-CVE-10-13 |                                                                   |                                                                               |                                                   |                    |                             |                             |                         |                   |                  |
| CO-CVE-10-15 |                                                                   |                                                                               |                                                   |                    |                             |                             |                         |                   |                  |
| CO-CVE-10-20 |                                                                   |                                                                               |                                                   |                    |                             |                             |                         |                   |                  |
| CO-CVE-10-25 |                                                                   |                                                                               |                                                   |                    |                             |                             |                         |                   |                  |
| CO-CVE-10-30 |                                                                   |                                                                               |                                                   |                    |                             |                             |                         |                   |                  |

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included


230v 60Hz / 115v 60Hz consultar - consult

### versión SIN RESERVA - without cold storage area

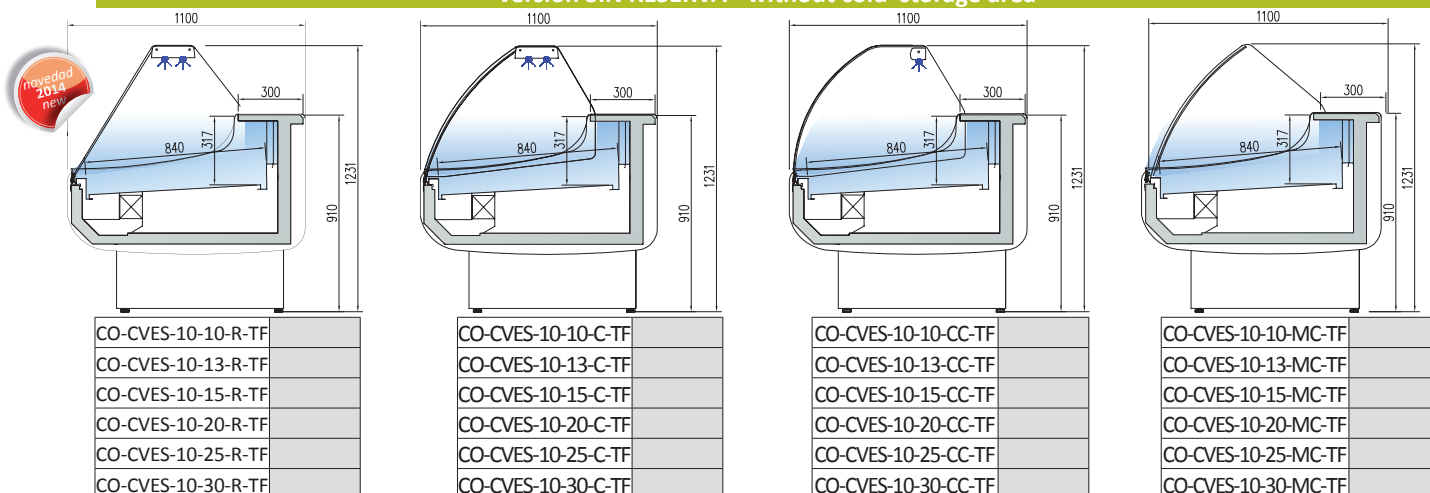



*Vitrina expositora modular serie 10 con y sin reserva*  
*Serve over counter modular line 10 with and without cold storage area*




opción costado compacto  
long sides option



DE SERIE  
STANDAR



CO-CVE-10-15-C  
madera  
wood




detalle cristal MC  
MC glass




CO-CVE-10-15-C  
lacado  
lacquered

VITRINAS  
EXPOSITOAS



decoracion frontal  
frontal decoration



estándar  
standard




CO-CVE

CO-CVES

## Módulos en ángulo refrigerados y neutros Refrigerated and neutral modular angle


### ÁNGULOS REFRIGERADOS / REFRIGERATED ANGLE

|                    |  |
|--------------------|--|
| CO-CVE-10-AP90-R   |  |
| CO-CVE-10-AP90-CC  |  |
| CO-CVE-10-AP90-C   |  |
| CO-CVE-10-AP90-MC  |  |
| CO-CVES-10-AP90-R  |  |
| CO-CVES-10-AP90-CC |  |
| CO-CVES-10-AP90-C  |  |
| CO-CVES-10-AP90-MC |  |




|                   |  |
|-------------------|--|
| CO-CVE-10-RP90-C  |  |
| CO-CVE-10-RP90-MC |  |

|                    |  |
|--------------------|--|
| CO-CVES-10-RP90-C  |  |
| CO-CVES-10-RP90-MC |  |




|                    |  |
|--------------------|--|
| CO-CVE-10-AN90-R   |  |
| CO-CVE-10-AN90-CC  |  |
| CO-CVE-10-AN90-C   |  |
| CO-CVE-10-AN90-MC  |  |
| CO-CVES-10-AN90-R  |  |
| CO-CVES-10-AN90-CC |  |
| CO-CVES-10-AN90-C  |  |
| CO-CVES-10-AN90-MC |  |



|                   |  |
|-------------------|--|
| CO-CVE-10-RN90-C  |  |
| CO-CVE-10-RN90-MC |  |

|                    |  |
|--------------------|--|
| CO-CVES-10-RN90-C  |  |
| CO-CVES-10-RN90-MC |  |




características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior e interior en chapa de acero plastificada
  - Plano exposición y encimera en acero inox AISI-304
  - Bandejas plano de exposición lisas, con escalón al mismo precio
  - Costados de 40 mm en ABS inyectado excepto acabado madera
  - Perfilera en aluminio anodizado
  - Paragolpes en la parte delantera
  - Cristal frontal templado, abatible
  - Doble iluminación estándar: encimera superior
  - Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
  - Evaporador ventilado
  - Condensación ventilada
  - Control electrónico de temperatura
  - Indicador de temperatura
  - Descarche automático
  - Evaporación automática de serie
  - Clase climática 3 (25°C 60% Hr) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

we reserve the right to change specifications without prior notice

- Interior and exterior finish in plastic coated steel
  - Display area and counter in stainless steel AISI-304
  - Smooth deck for display area, stepped at same price
  - 40 mm sides in injected ABS, except wood decor, two version available
  - Anodised aluminium profiles
  - Front rubber bumper
  - Tempered and hinged frost glass
  - Double standard lighting: top worktop
  - 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
  - Ventilated evaporator
  - Ventilated condensation
  - Electronic temperature controller
  - External thermometer
  - Auto defrost
  - Standard automatic evaporation
  - Climate class 3 (25°C 60% Hr) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

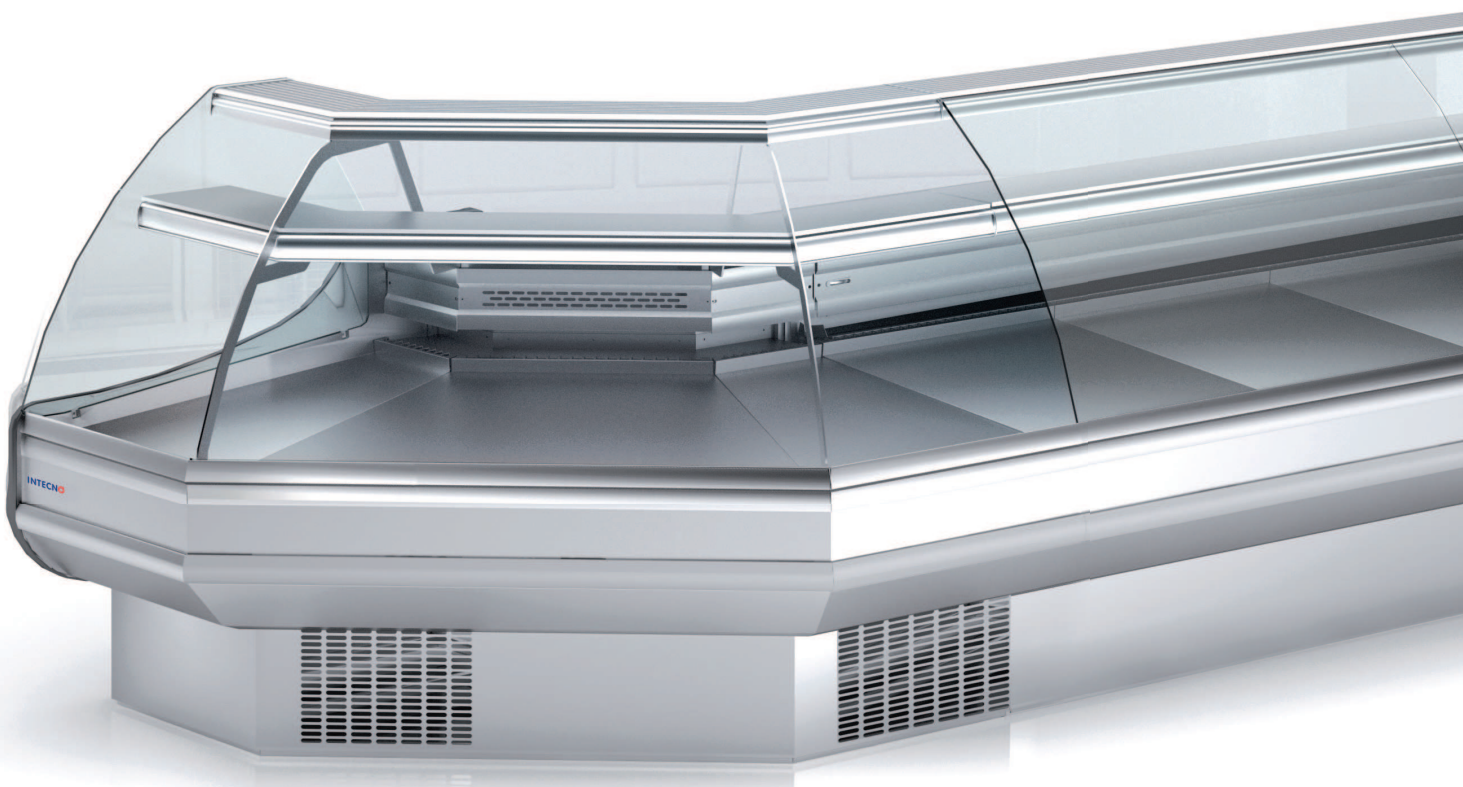




# Vitrina expositora modular serie 10 supermercado con y sin reserva

## Serve over counter modular line 10 FOOD MARKET with and without cold storage area

### ÁNGULOS NEUTROS / NEUTRAL ANGLE


|                    |  |
|--------------------|--|
| CO-CVE-10N-AP45-R  |  |
| CO-CVE-10N-AP45-CC |  |
| CO-CVE-10N-AP45-C  |  |
| CO-CVE-10N-AP45-MC |  |

|                     |  |
|---------------------|--|
| CO-CVES-10N-AP45-R  |  |
| CO-CVES-10N-AP45-CC |  |
| CO-CVES-10N-AP45-C  |  |
| CO-CVES-10N-AP45-C  |  |




|                    |  |
|--------------------|--|
| CO-CVE-10N-AN45-R  |  |
| CO-CVE-10N-AN45-CC |  |
| CO-CVE-10N-AN45-C  |  |
| CO-CVE-10N-AN45-MC |  |

|                     |  |
|---------------------|--|
| CO-CVES-10N-AN45-R  |  |
| CO-CVES-10N-AN45-CC |  |
| CO-CVES-10N-AN45-C  |  |
| CO-CVES-10N-AN45-C  |  |




### MUEBLE CAJA NEUTROS EN ÁNGULO / ANGULAR NEUTRAL CASH COUNTER

|                  |  |
|------------------|--|
| CO-CMCVE-10-AP90 |  |
|------------------|--|




|                  |  |
|------------------|--|
| CO-CMCVE-10-AN90 |  |
|------------------|--|




### MUEBLES NEUTROS CAJA\* / CASH NEUTRAL COUNTER\*

\*TODOS INCORPORAN CAJÓN, ESTANTES Y ENCHUFE /  
SUPPLIED WITH DRAWER, SHELVES AND PLUG

|                         |  |
|-------------------------|--|
| CO-CMCVE-10-8           |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |



|                         |  |
|-------------------------|--|
| CO-CMCVE-10-12          |  |
| Decoración incremento 1 |  |
| Decoración incremento 2 |  |
| Decoración incremento 3 |  |




### Opciones - Options

|                                                                           |                                                                    |                                                                                    |                                                                             |                             |                         |                                   |                   |                  |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|
| sólo frontal, inox lacado ó madera<br>only front, Inox, lacquered or wood | sólo frontal lacado alto brillo<br>only front High gloss lacquered | costados + frontal, inox lacado ó madera<br>sides + front, Inox, lacquered or wood | costados + frontal lacado alto brillo<br>sides + front High gloss lacquered | luz extra<br>extra lighting | LED blanco<br>white LED | cierre plexi<br>plexi slide doors | neutro<br>neutral | remoto<br>remote |
|---------------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------|-------------------------|-----------------------------------|-------------------|------------------|

230v 60Hz / 115v 60Hz

consultar - consult

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

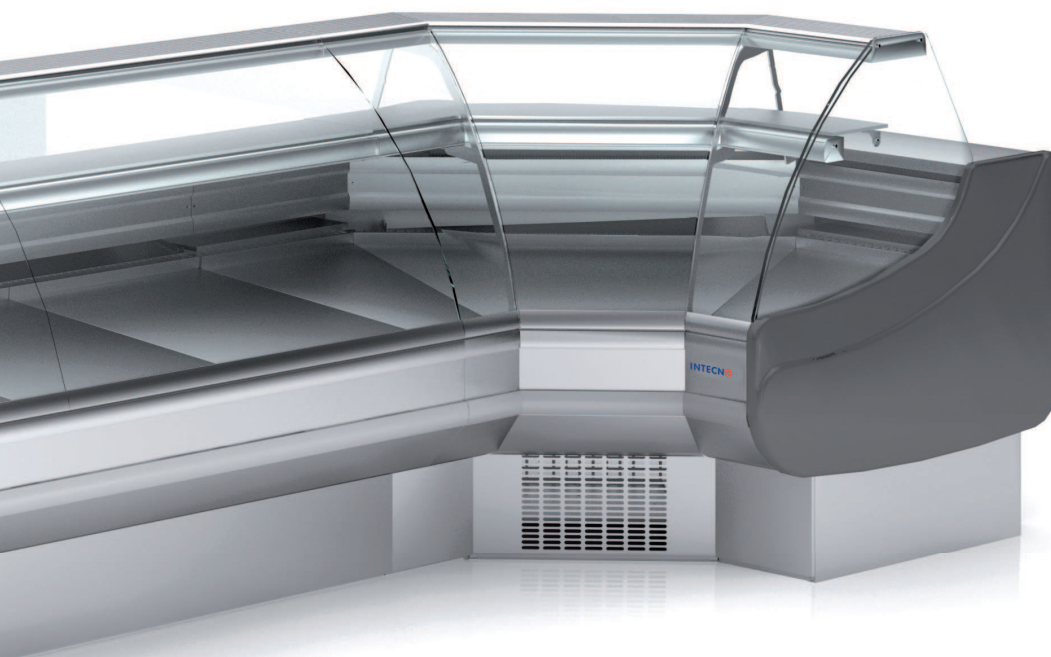


Detalle mueble caja (trasero)  
Cash counter (rear view)




Detalle mueble caja (frente)  
Cash counter (front view)

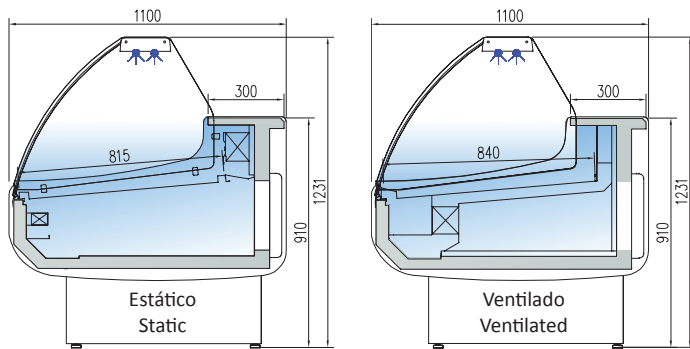

**versión CON RESERVA - with cold storage area**


|              |  |
|--------------|--|
| CO-CVEM-C    |  |
| CO-CVEM-C-PR |  |

|              |  |
|--------------|--|
| CO-CVEM-C    |  |
| CO-CVEM-C-PR |  |

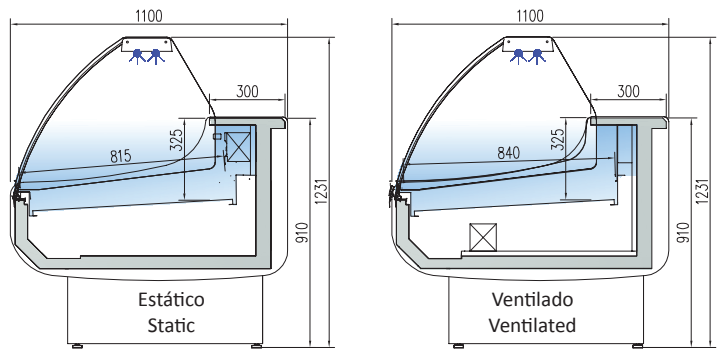**versión SIN RESERVA - without cold storage area**


|               |  |
|---------------|--|
| CO-CVEMS-C    |  |
| CO-CVEMS-C-PR |  |

|               |  |
|---------------|--|
| CO-CVEMS-C    |  |
| CO-CVEMS-C-PR |  |


| ref. | largo<br>length<br>(mm) | fondo<br>depth<br>(mm) | alto<br>height<br>(mm) | cámara<br>storage<br>(m³) | potencia frig.<br>frig. power<br>(W x m) | consumo<br>consumption<br>(W x m) | exposición<br>display<br>(m²) | puertas<br>doors<br>(uds) |
|------|-------------------------|------------------------|------------------------|---------------------------|------------------------------------------|-----------------------------------|-------------------------------|---------------------------|
| CVEM | 1000                    | 1100                   | 1235                   | 0,33                      | 350W x m R-404A                          | 715                               | 0,75                          | 1                         |

características técnicas y constructivas sujetas a variación sin previo aviso

- Diseño especial para plazas y mercados
- Precio por metro lineal de vitrina, costados no incluidos
- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Costados de 40 mm en ABS inyectado excepto acabado madera, no incluidos
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilería en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Sin estante de cristal intermedio (mayor visibilidad)
- Iluminación estándar: encimera superior (doble tubo)
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- CVVEM: Versión evaporador ventilado
- CVEM: Versión evaporador estático con doble batería
- Reserva refrigerada con puertas, hueco libre 440x270.
- Condensación ventilada, evaporación automática de serie
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático, opcional por resistencia eléctrica
- Clase climática 3 ( 25°C 60%HR) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006
- kit de unión incluido en el precio
- PR: Modelo pre-instalación (no incluye sistema de expansión ni válvulas)

we reserve the right to change specifications without prior notice


- Design focused for food market
- Price per linear meter, sides not included
- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- 40 mm sides in injected ABS, except wood decor, two version available
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Toughened curved glass hinges forward
- No intermediate glass shelf (higher visibility)
- Standard lighting: top worktop (double fluorescent)
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Ventilated version, one evaporator
- CVEM: Static, with double evaporator
- CVVEM Ventilated evaporator
- Ventilated condensation and automatic evaporation as standard
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Climate class 3 (25°C 60%HR) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006
- Joint kit included in price
- PR: remote condenser unit (expansion system and valves, are not included)

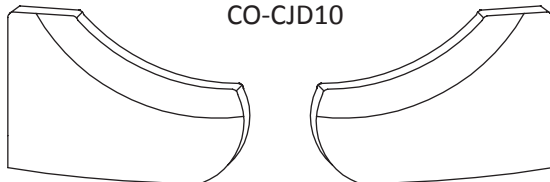**CO-CJD10**



|                                   |                                     |                                      |
|-----------------------------------|-------------------------------------|--------------------------------------|
| KIT dos costados<br>Two sides KIT | decoración Inox<br>steel decoration | kit cierre plexi<br>Fkit doors plexi |
| CO-CJD10                          |                                     |                                      |
| 230v 60Hz / 115v 60Hz             | consultar - consult                 |                                      |

**PVP POR UNIDAD / UNIT PRICES**


|                    |  |
|--------------------|--|
| CO-CVEM-AP90-C     |  |
| CO-CVEM-AP90-C-PR  |  |
| CO-CVEMS-AP90-C    |  |
| CO-CVEMS-AP90-C-PR |  |




|                    |  |
|--------------------|--|
| CO-CVEM-AN90-C     |  |
| CO-CVEM-AN90-C-PR  |  |
| CO-CVEMS-AN90-C    |  |
| CO-CVEMS-AN90-C-PR |  |



*Vitrina expositora modular serie 10 SUPERMERCADO con y sin reserva*  
*Serve over counter modular line 10 FOOD MARKET with and without cold storage area*




opción costado compacto  
long sides option

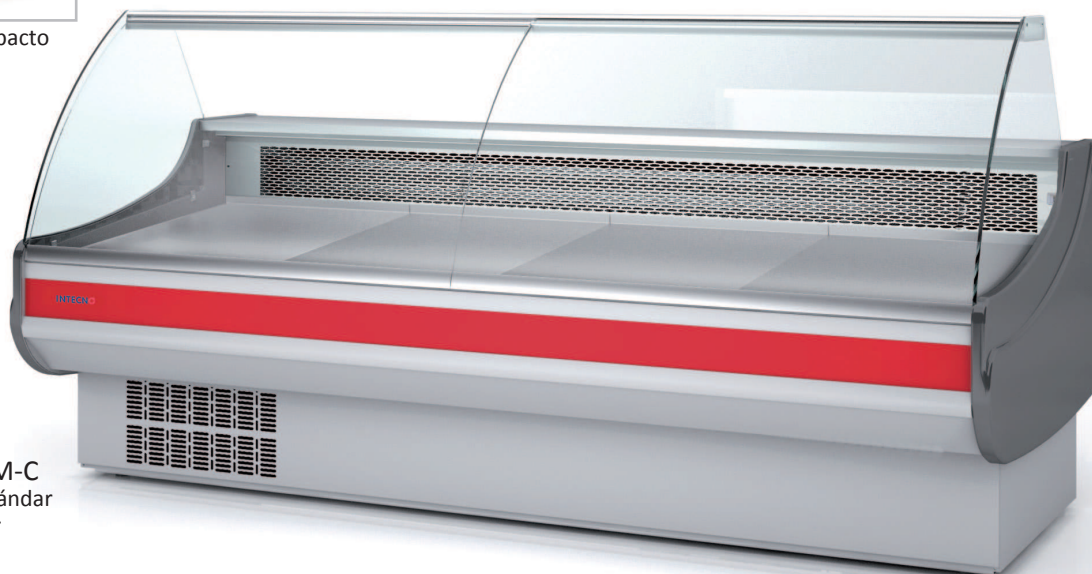


2xCO-CVVEM-C  
decoración estándar  
standard decor





2xCO-CVVEM-C  
frontal inox  
stainless steel front decor

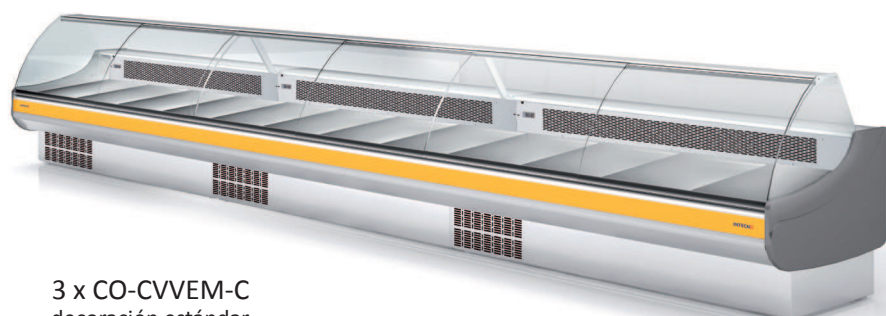


3 x CO-CVVEM-C  
decoración estándar  
standard decor

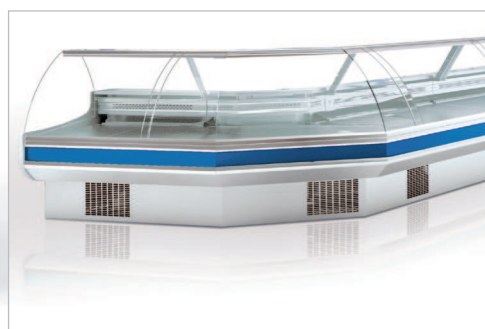

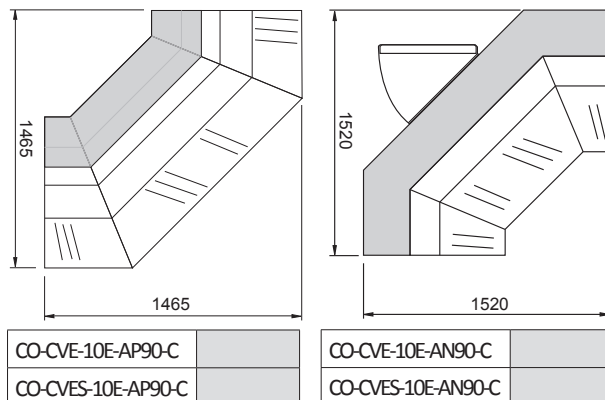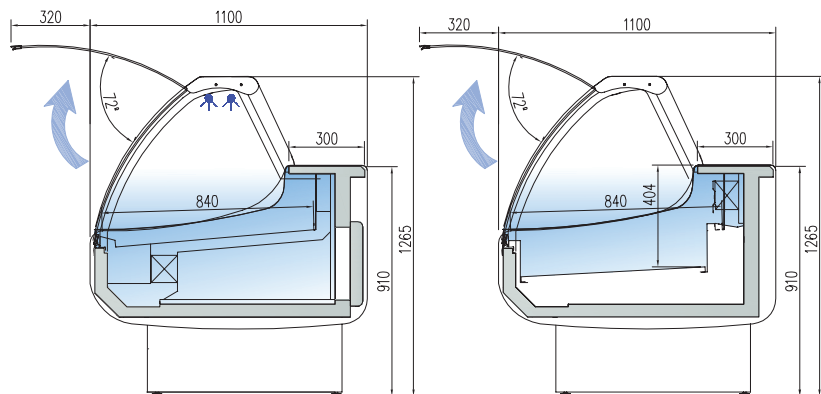

|                    |  |
|--------------------|--|
| CO-CVE-10E-10-C-TF |  |
| CO-CVE-10E-13-C-TF |  |
| CO-CVE-10E-15-C-TF |  |
| CO-CVE-10E-20-C-TF |  |
| CO-CVE-10E-25-C-TF |  |
| CO-CVE-10E-30-C-TF |  |

|                     |  |
|---------------------|--|
| CO-CVES-10E-10-C-TF |  |
| CO-CVES-10E-13-C-TF |  |
| CO-CVES-10E-15-C-TF |  |
| CO-CVES-10E-20-C-TF |  |
| CO-CVES-10E-25-C-TF |  |
| CO-CVES-10E-30-C-TF |  |

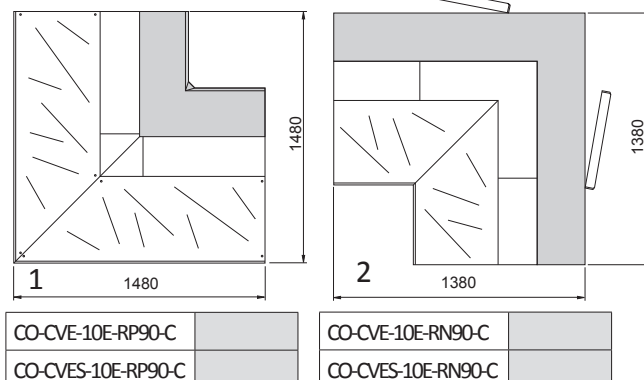

| ref.            | largo length (mm) | exposición display (m²) | CVE cámara storage (m³) | CVE puertas doors (uds) | CVES cámara storage (m³) | CVES puertas dSoors (uds) | potencia frig. frig. power (W) | consumo consumption (A) | consumo consumption (KW/24h) | refrigerante coolant |
|-----------------|-------------------|-------------------------|-------------------------|-------------------------|--------------------------|---------------------------|--------------------------------|-------------------------|------------------------------|----------------------|
| CO-CVE-10E-10   | 1055              | 0,75                    | 0,38                    | 1                       | 0                        | 0                         | 545                            | 4.32                    | 10.9                         | R-404A               |
| CO-CVE-10E-13   | 1305              | 0,98                    | 0,5                     | 2                       | 0                        | 0                         | 635                            | 5.92                    | 14.9                         | R-404A               |
| CO-CVE-10E-15   | 1525              | 1,13                    | 0,58                    | 2                       | 0                        | 0                         | 855                            | 6.49                    | 16.4                         | R-404A               |
| CO-CVE-10E-20   | 2025              | 1,52                    | 0,79                    | 3                       | 0                        | 0                         | 1050                           | 7.04                    | 17.8                         | R-404A               |
| CO-CVE-10E-25   | 2525              | 1,91                    | 0,99                    | 4                       | 0                        | 0                         | 1220                           | 7.06                    | 17.8                         | R-404A               |
| CO-CVE-10E-30   | 2995              | 2,30                    | 1,25                    | 4                       | 0                        | 0                         | 1755                           | 8.71                    | 22.1                         | R-404A               |
| CO-CVE-10E-AN90 | 1525              | 1,09                    | 0,1                     | 1                       | 0                        | 0                         | 675                            | 5.33                    | 13.4                         | R-404A               |
| CO-CVE-10E-AP90 | 2025              | 1.27                    | 0                       | 0                       | 0                        | 0                         | 675                            | 5.33                    | 13.4                         | R-404A               |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilaría en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible y elevable
- Iluminación doble en la encimera
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270 (excepto modelo neutro)
- Evaporador ventilado
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático, opcional por resistencia eléctrica
- Clase climática 3 ( 25°C 60%Hr) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- 40 mm sides in injected ABS, except wood decor, two version available
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Tempered and liftable front glass
- Double top lighting
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors, 440x270 free (except for ambient models)
- Static evaporator, ventilated as optional
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Climate class 3 (25°C 60%Hr) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

#### Opciones - Options


|           | madera o lacado sólo frontal<br>lacquered or wood only front | madera o lacado incluidos costados<br>lacquered or wood including sides | lacado alto brillo<br>High glossy lacquered | cierre plexi<br>plexi doors | LED blanco<br>white LED | neutra<br>neutral | remoto<br>remote |
|-----------|--------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------|-----------------------------|-------------------------|-------------------|------------------|
| CO-CVE-10 |                                                              |                                                                         |                                             |                             |                         |                   |                  |
| CO-CVE-13 |                                                              |                                                                         |                                             |                             |                         |                   |                  |
| CO-CVE-15 |                                                              |                                                                         |                                             |                             |                         |                   |                  |
| CO-CVE-20 |                                                              |                                                                         |                                             |                             |                         |                   |                  |
| CO-CVE-25 |                                                              |                                                                         |                                             |                             |                         |                   |                  |
| CO-CVE-30 |                                                              |                                                                         |                                             |                             |                         |                   |                  |

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

230v 60Hz / 115v 60Hz consultar - consult



*Vitrina expositora modular serie 10 cristal elevable con y sin reserva*  
*Serve over counter modular line 10 liftable glass with and without cold storage area*




opción costado compacto  
 long sides option



DE SERIE  
 STANDAR




CO-CVE-10E-20

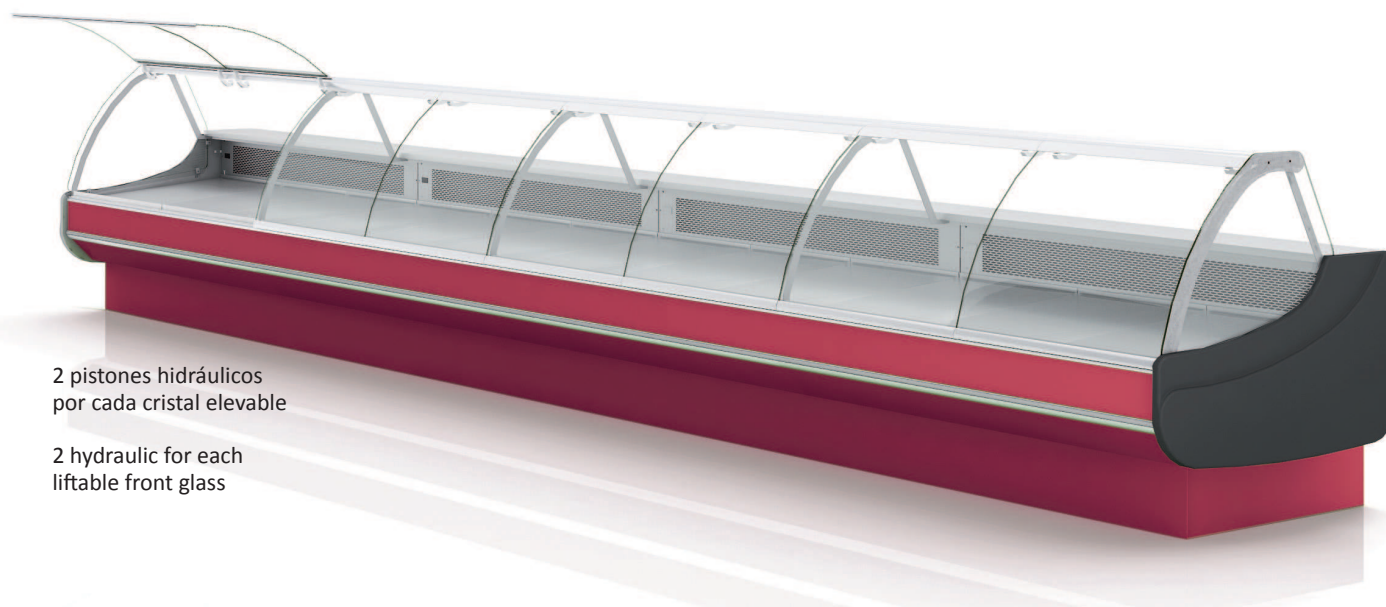


2 pistones hidráulicos  
 por cada cristal elevable

2 hydraulic for each  
 liftable front glass

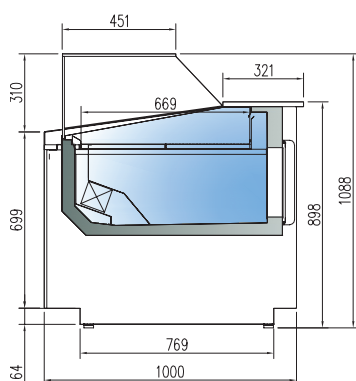

|                  |  |
|------------------|--|
| CO-CVEG-10-10-TF |  |
| CO-CVEG-10-13-TF |  |
| CO-CVEG-10-15-TF |  |
| CO-CVEG-10-20-TF |  |

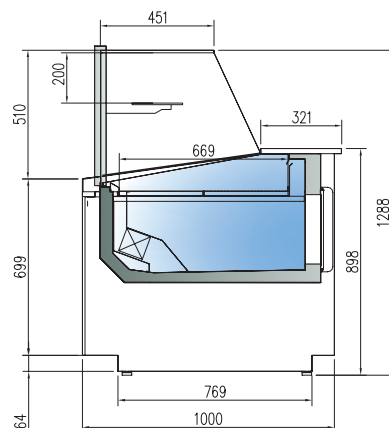

|                   |  |
|-------------------|--|
| CO-CVEPC-10-10-TF |  |
| CO-CVEPC-10-13-TF |  |
| CO-CVEPC-10-15-TF |  |
| CO-CVEPC-10-20-TF |  |

| ref.           | largo<br>length<br>(mm) | cámara<br>storage<br>(m³) | exposición<br>display<br>(m²) | puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(A) | consumo<br>consumption<br>(KW/24h) | refrigerante<br>coolant |
|----------------|-------------------------|---------------------------|-------------------------------|---------------------------|--------------------------------------|-------------------------------|------------------------------------|-------------------------|
| CO-CVEG-10-10  | 1035                    | 0,33                      | 0,61                          | 1                         | 545                                  | 4.32                          | 10.9                               | R-404A                  |
| CO-CVEG-10-13  | 1285                    | 0,45                      | 0,80                          | 2                         | 635                                  | 5.92                          | 14.9                               | R-404A                  |
| CO-CVEG-10-15  | 1505                    | 0,50                      | 0,95                          | 2                         | 855                                  | 6.49                          | 16.4                               | R-404A                  |
| CO-CVEG-10-20  | 2005                    | 0,70                      | 1,21                          | 3                         | 1050                                 | 7.04                          | 17.8                               | R-404A                  |
| COCVEPC-10-10  | 1035                    | 0,33                      | 0,61                          | 1                         | 545                                  | 4.32                          | 10.9                               | R-404A                  |
| CO-CVEPC-10-13 | 1285                    | 0,45                      | 0,80                          | 2                         | 635                                  | 5.92                          | 14.9                               | R-404A                  |
| CO-CVEPC-10-15 | 1505                    | 0,50                      | 0,95                          | 2                         | 855                                  | 6.49                          | 16.4                               | R-404A                  |
| CO-CVEPC-10-20 | 2005                    | 0,70                      | 1,21                          | 3                         | 1050                                 | 7.04                          | 17.8                               | R-404A                  |

Características técnicas y constructivas sujetas a variación sin previo aviso

- Máxima visibilidad del producto expuesto
- Plano exposición, elevado sin inclinación, en acero inox AISI-304
- Costados (30 mm) y frontal, en dos acabados disponibles: DM hidrófugo + PVC o lacado alto brillo metalizado (incluidos en el precio)
- Encimera de trabajo en cuarzo tecnológico, color blanco, con iluminación LED sobre el plano de exposición
- Cristales templados
- Reserva refrigerada con puertas, hueco 440x270 (excepto modelo neutro)
- Evaporador ventilado, con tratamiento epoxi anti-corrosión
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura y descarches
- Descarche automático, opcional por resistencia eléctrica
- Indicador de temperatura
- Clase climática 3 ( 25°C 60%Hr)
- Rango de temperatura producto -1/+5°C (UNE-EN ISO 23953-2:2006)

We reserve the right to change specifications without prior notice

- Maximum display area
- Stainless steel AISI-304 display area, elevated without tilt
- Sides (30 mm) and front, available in two finishes: DM + waterproof PVC or lacquered high gloss metallic (included in price)
- White technological quartz countertop, with LED lighting over the display area
- Tempered glass
- Refrigerated under storage with doors, 440x270 (except for ambient models)
- Ventilated evaporator, with epoxy cover
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature and defrost controller
- Auto defrost, by heated cable as optional
- External thermometer
- Climate class 3 (25°C 60%Hr)
- Product temperature -1/+5°C (UNE-EN ISO 23953-2:2006)

## opciones - options



Disponible acabados de la carta NCS o RAL, incluidos en el precio estándar, excepto alto brillo y metalizados.


Available finish included in NCS or RAL color chart, at the same price, except glossy and metallic finishing

| ref.          | cierre plexi<br>plexi slide doors | neutra<br>neutral | preinstalación<br>remote unit |
|---------------|-----------------------------------|-------------------|-------------------------------|
| CO-CVEG-10-10 |                                   |                   |                               |
| CO-CVEG-10-13 |                                   |                   |                               |
| CO-CVEG-10-15 |                                   |                   |                               |
| CO-CVEG-10-20 |                                   |                   |                               |

230v 60Hz / 115v 60Hz      consultar - consult

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included

*Vitrina expositora modular CO-CVEG / CO-CVEPC 10*  
*CO-CVEG / CO-CVEPC 10 modular serve over counter*



DE SERIE  
STANDAR



CO-CVEG-10-20-TF




CO-CVEPC-10-20-TF

VITRINAS  
EXPOSITOAS




ÁNGULOS REFRIGERADOS / REFRIGERATED ANGLE

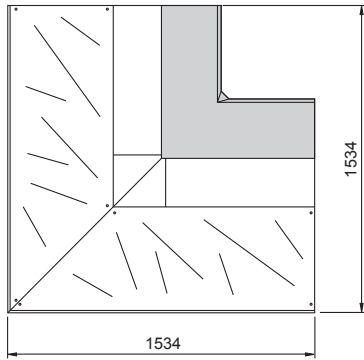

|                  |  |
|------------------|--|
| CO-CVEG-10-RP90  |  |
| CO-CVEPC-10-RP90 |  |

Características técnicas y constructivas sujetas a variación sin previo aviso

- Máxima visibilidad del producto expuesto
- Plano exposición, elevado sin inclinación, en acero inox AISI-304
- Costados (30 mm) y frontal, en dos acabados disponibles: DM hidrófugo + PVC o lacado alto brillo metalizado (incluidos en el precio)
- Encimera de trabajo en cuarzo tecnológico, color blanco, con iluminación LED sobre el plano de exposición
- Cristales templados
- Reserva refrigerada con puertas, hueco 440x270 (excepto modelo neutro)
- Evaporador ventilado, con tratamiento epoxi anti-corrosión
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura y descarches
- Descarche automático, opcional por resistencia eléctrica
- Indicador de temperatura
- Clase climática 3 ( 25°C 60% Hr)
- Rango de temperatura producto -1/+5°C (UNE-EN ISO 23953-2:2006)

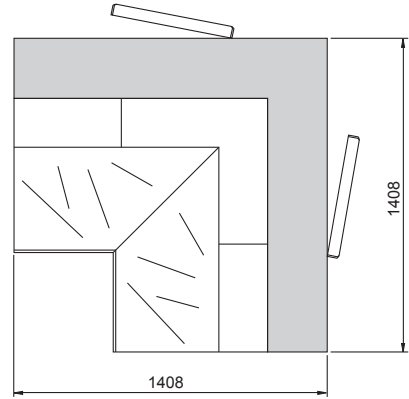

|                  |  |
|------------------|--|
| CO-CVEG-10-RN90  |  |
| CO-CVEPC-10-RN90 |  |

We reserve the right to change specifications without prior notice

- Maximum display area
- Stainless steel AISI-304 display area, elevated without tilt
- Sides (30 mm) and front, available in two finishes: DM + waterproof PVC or lacquered high gloss metallic (included in price)
- White technological quartz countertop, with LED lighting over the display area
- Tempered glass
- Refrigerated under storage with doors, 440x270 free (except for ambient models)
- Ventilated evaporator, with epoxy cover
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature and defrost controller
- Automatic defrost, optional by heated cable
- External thermometer
- Climate class 3 (25°C 60% Hr)
- Product temperature -1/+5°C (UNE-EN ISO 23953-2:2006)



CO-CVEPC-10-15

CO-CVEPC-10-RP90

# Vitrina expositora modular CO-CVEG / CO-CVEPC 10 CO-CVEG / CO-CVEPC 10 modular serve over counter




Detalle mueble caja (trasero)  
Cash counter (rear view)




Detalle mueble caja (frente)  
Cash counter (front view)

MUEBLE NEUTROS CAJA\* / CASH NEUTRAL COUNTER\*  
\*INCORPORA CAJÓN, ESTANTES Y ENCHUFE/  
SUPPLIED WITH DRAWER, SHELVES AND PLUG



CO-CMCVEG-10-10

MUEBLE MOSTRADOR NEUTROS  
NEUTRAL COUNTER

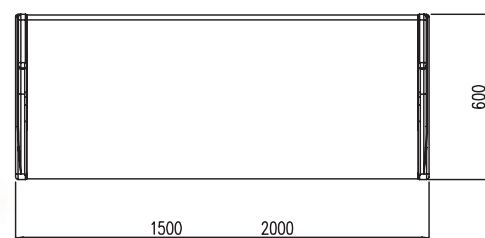

CO-CMG-150  
CO-CMG-200



CO-CMG-150

CO-CVEG-10-RP90

CO-CVEG-10-20

## opciones - options



Disponible acabados de la carta NCS o RAL, incluidos en el precio estándar, excepto alto brillo y metalizados.

Available finish included in NCS or RAL color chart, at the same price, except glossy and metallic finishing


| ref.             | cierre plexi<br>plexi slide doors | neutra<br>neutral | remoto<br>remote unit |
|------------------|-----------------------------------|-------------------|-----------------------|
| CO-CVEG-10-AP90  |                                   |                   |                       |
| CO-CVEG-10-AN90  |                                   |                   |                       |
| CO-CVEPC-10-AP90 |                                   |                   |                       |
| CO-CVEPC-10-AN90 |                                   |                   |                       |

230v 60Hz / 115v 60Hz consultar - consult


Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included




CO-CVEPC-10-15

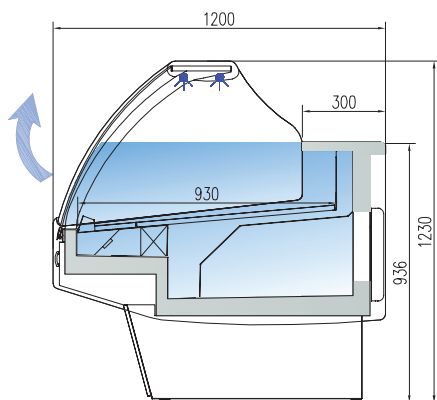


|                   |  |
|-------------------|--|
| CO-CVE-12-10-C-TF |  |
| CO-CVE-12-13-C-TF |  |
| CO-CVE-12-15-C-TF |  |
| CO-CVE-12-20-C-TF |  |
| CO-CVE-12-25-C-TF |  |
| CO-CVE-12-30-C-TF |  |

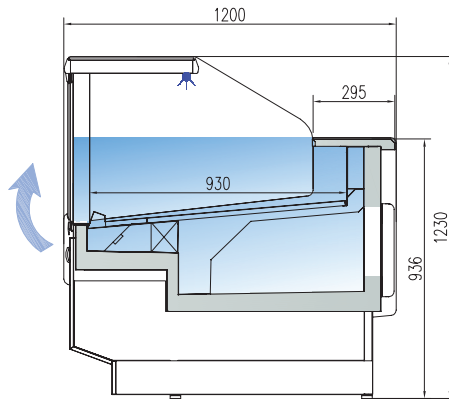

|                    |  |
|--------------------|--|
| CO-CVE-12-10-RR-TF |  |
| CO-CVE-12-13-RR-TF |  |
| CO-CVE-12-15-RR-TF |  |
| CO-CVE-12-20-RR-TF |  |
| CO-CVE-12-25-RR-TF |  |
| CO-CVE-12-30-RR-TF |  |

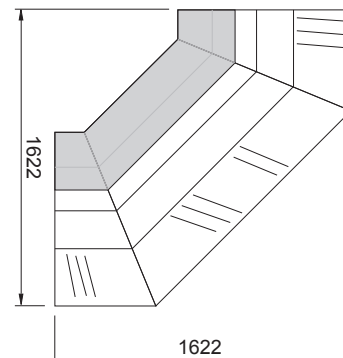

CVE-12-AP90-C

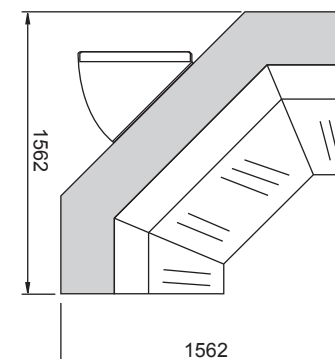

CVE-12-AN90-C

| ref.           | largo<br>length<br>(mm) | exposición<br>display<br>(m²) | CVE cámara<br>storage<br>(m³) | CVE puertas<br>doors<br>(uds) | CVES cámara<br>storage<br>(m³) | CVES puertas<br>doors<br>(uds) | potencia frig.<br>frig. power<br>(W) | consumo<br>consumption<br>(A) | consumo<br>consumption<br>(KW/24h) | refrigerante<br>coolant |
|----------------|-------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|--------------------------------|--------------------------------------|-------------------------------|------------------------------------|-------------------------|
| CO-CVE-12-10   | 1055                    | 0,75                          | 0,38                          | 1                             | 0                              | 0                              | 815                                  | 5.5                           | 10.9                               | R-404A                  |
| CO-CVE-12-13   | 1305                    | 0,98                          | 0,5                           | 2                             | 0                              | 0                              | 1040                                 | 5.6                           | 14.9                               | R-404A                  |
| CO-CVE-12-15   | 1525                    | 1,13                          | 0,58                          | 2                             | 0                              | 0                              | 1315                                 | 6.6                           | 16.4                               | R-404A                  |
| CO-CVE-12-20   | 2025                    | 1,52                          | 0,79                          | 3                             | 0                              | 0                              | 1495                                 | 8.1                           | 17.8                               | R-404A                  |
| CO-CVE-12-25   | 2525                    | 1,91                          | 0,99                          | 4                             | 0                              | 0                              | 2010                                 | 10.0                          | 17.8                               | R-404A                  |
| CO-CVE-12-30   | 2995                    | 2,30                          | 1,25                          | 4                             | 0                              | 0                              | 2365                                 | 10.3                          | 22.1                               | R-404A                  |
| CO-CVE-12-AN90 | 1525                    | 1,09                          | 0,1                           | 1                             | 0                              | 0                              | 1120                                 | 7.5                           | 19.1                               | R-404A                  |
| CO-CVE-12-AP90 | 2025                    | 1.27                          | 0                             | 0                             | 0                              | 0                              | 1120                                 | 7.5                           | 19.1                               | R-404A                  |

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas, con escalón al mismo precio
- Costados de 40 mm en ABS inyectado excepto acabado madera
- Decoración estándar: costados cortos gris oscuro frontal gris + franja decorativa azul. Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible y elevable
- Iluminación doble en la encimera
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Evaporador ventilado
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarga automática, opcional por resistencia eléctrica
- Clase climática 3 (25°C 60%HR) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area, stepped at same price
- 40 mm sides in injected ABS, except wood decor, two version available
- Standard decoration: short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Tempered and liftable front glass
- Double top lighting
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Static evaporator, ventilated as optional
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Climate class 3 (25°C 60%HR) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

### Opciones - Options

| ref.      | madera o lacado sólo frontal<br>lacquered or wood only front | madera o lacado incluidos costados<br>lacquered or wood including sides | lacado alto brillo<br>High glossy lacquered | sin reserva CVES<br>no cooling area | cierre plexi<br>plexi doors | LED blanco<br>white LED | neutra<br>neutral | remoto<br>remote |
|-----------|--------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------|-------------------------------------|-----------------------------|-------------------------|-------------------|------------------|
| CO-CVE-10 |                                                              |                                                                         |                                             |                                     |                             |                         |                   |                  |
| CO-CVE-13 |                                                              |                                                                         |                                             |                                     |                             |                         |                   |                  |
| CO-CVE-15 |                                                              |                                                                         |                                             |                                     |                             |                         |                   |                  |
| CO-CVE-20 |                                                              |                                                                         |                                             |                                     |                             |                         |                   |                  |
| CO-CVE-25 |                                                              |                                                                         |                                             |                                     |                             |                         |                   |                  |
| CO-CVE-30 |                                                              |                                                                         |                                             |                                     |                             |                         |                   |                  |

Versión REMOTO, incluye sistema de expansión y válvulas - REMOTE version, expansion system and valves, are included


230v 60Hz / 115v 60Hz consultar - consult




*Vitrina expositora modular serie 12 cristal elevable, con y sin reserva*  
*Serve over counter modular line 12 liftable glass, with and without cold storage*



DE SERIE  
STANDAR

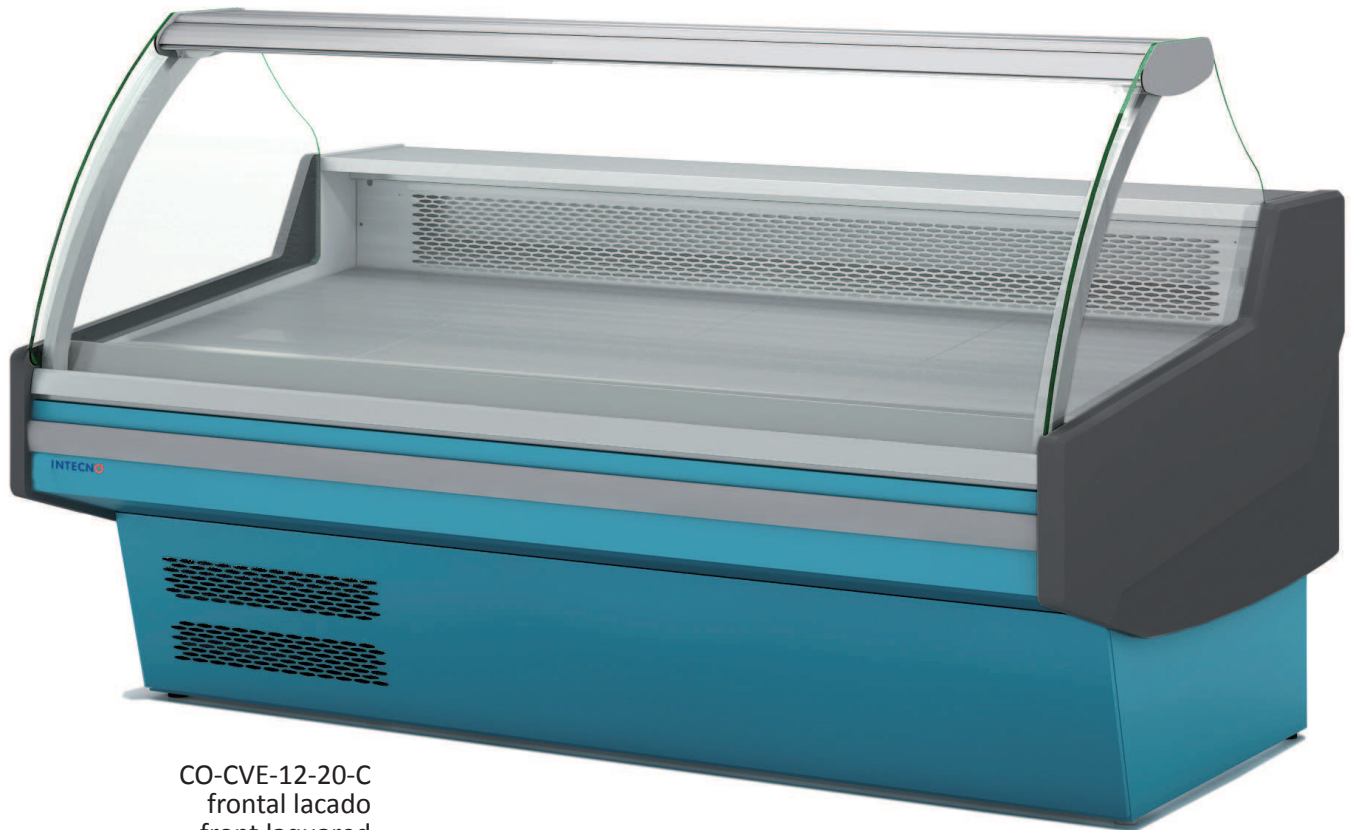

CO-CVE-12-20-C  
frontal lacado  
front laquered

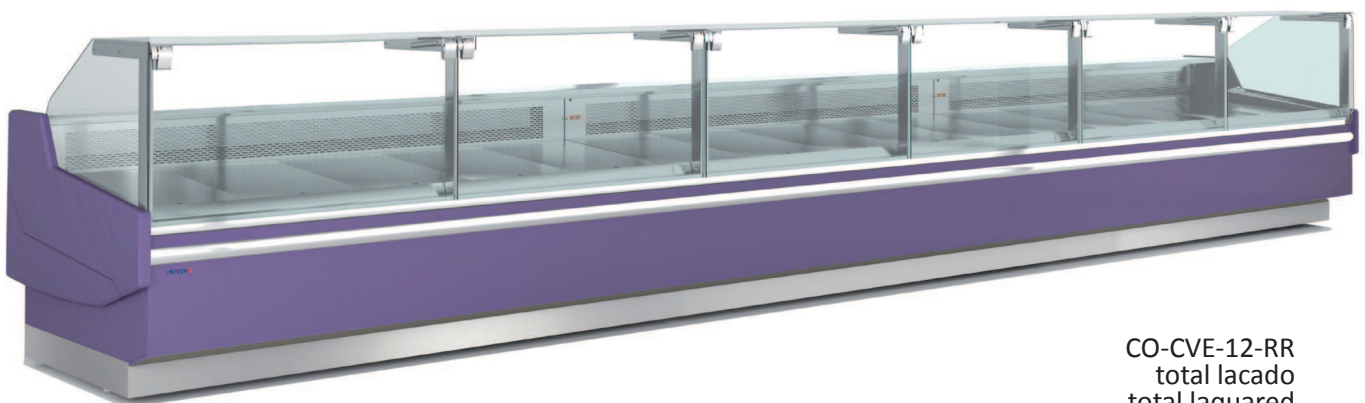

CO-CVE-12-RR  
total lacado  
total laquered